DOD-STD-35-76A(MI)

28 AUGUST 1978
SUPERSEDING
MIL-STD-35-76(MI)
21 MARCH 1975

MILITARY STANDARD

THERMISTORS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Thermistors
Automated Engineering
Document Preparation System

DOD-STD-35-76A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-76A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Thermistors.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	3
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	9

APPENDICES

Appendix	A	Illustrations	109
	B	Characteristic Code Index	127
		Index	133

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General . This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Thermistors.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE'S for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
THERMISTOR, NEGATIVE TEMPERATURE COEFFICIENT	0040011	MIL-T-23648	
THERMISTOR, POSITIVE TEMPERATURE COEFFICIENT	004002	MIL-T-23648	
THERMISTOR ASSEMBLY	004003	MIL-T-23648	
THERMISTOR PROBE	004004	MIL-T-23648	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-T-23648	Thermistor, (Thermally Sensitive Resistor) Insulated, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1276	Leads, Weldable, for Electronic Component Parts
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Thermistors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Thermistors, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Thermistors.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35- are applicabl e to Thermistors.

4.3.2 Illustrations. Illustrations applicable to Thermistors are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for thermistor characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE II. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	ZERO-POWER RES AT 25 DEGREES C OHMS	1564	ZERO-POWER RES AT 25 DEGREES C KILOHMS	1566	ZERO-POWER RES AT 25 DEGREES C MEGOHMS
1568	ZERO-POWER RES TOL AT 25 DEG C PERCENT	1640	RESISTANCE RATIO NUMBER	1642	RESISTANCE RATIO TOL PERCENT
7021	MAX WEIGHT GRAMS	7022	MAX WEIGHT OUNCES		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS That are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*Requesters NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM (S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM ~~6369.~~
0700	
0800	
	SOURCE.(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION,	6874
*SOURCE TABLE	
NOTE : REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT NUMBER	0108
SCOPE	
NOTE : THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE : AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE : AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
STYLE (DESIGNATION)	1569
LEAD TYPE (DESIGNATION)	1570
RESISTANCE TOLERANCE (DESIGNATION)	1571
RATINGS	
CURRENT RATING	
MAXIMUM CURRENT (SELECT ONE)	
(AMPERES)	7594
(MILLIAMPERES)	7595
NOMINAL CURRENT (SELECT ONE)	
(AMPERES)	7597
(MILLIAMPERES)	7598
POWER RATING	
MAXIMUM POWER (SELECT ONE)	
(WATTS)	1620
AMBIENT TEMPERATURE (DEGREES CELSIUS)	1624
DERATE TO ZERO WATTS AT (DEGREES CELSIUS)	1626

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1569	STYLE. STYLE 1569 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1570	LEAD TYPE. LEAD TYPE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1571	RESISTANCE TOLERANCE. RESISTANCE TOLERANCE 1571 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	RATINGS.
	CURRENT RATING.
7594	THE MAXIMUM CURRENT RATING SHALL BE 7594 AMPERE(S).
7595	THE MAXIMUM CURRENT RATING SHALL BE 7595 MILLIAMPERE(S).
7597	THE NOMINAL CURRENT RATING SHALL BE 7597 AMPERE(S).
7598	THE NOMINAL CURRENT RATING SHALL BE 7598 MILLIAMPERE(S).
1620	POWER RATING. THE MAXIMUM POWER RATING SHALL BE 1620 WATT(S).
1624	THE POWER RATING AMBIENT TEMPERATURE SHALL BE 1624 DEGREES CELSIUS.
1626	DERATE TO ZERO WATTS AT AN AMBIENT TEMPERATURE OF 1626 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
MAXIMUM POWER (CONT)	
(MILLIWATTS)	1622
AMBIENT TEMPERATURE (DEGREES CELSIUS)	1623
DERATE TO ZERO MILLIWATTS AT (DEGREES CELSIUS)	1625
RESISTANCE RATIO RATING	
*(RATIO)	1640
TOLERANCE (PERCENT)	1642
STANDARD REFERENCE TEMPERATURE (DEGREES CELSIUS)	1644
EXTREME TEMPERATURE (DEGREES CELSIUS)	1646
TOLERANCE (DEGREES CELSIUS)	1648
VOLTAGE RATING	
MAXIMUM VOLTAGE (SELECT ONE)	
VOLTS (SELECT ONE)	
(VOLTS AC)	7609
(VOLTS DC)	7610
(VOLTS RMS)	7611

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1622	POWER RATING. THE MAXIMUM POWER RATING SHALL BE 1~~1622~~ MILLIWATT(S).
1623	THE POWER RATING AMBIENT TEMPERATURE SHALL BE ~~1623~~ DEGREES CELSIUS.
1625	DERATE TO ZERO MILLIWATTS AT AN AMBIENT TEMPERATURE OF 1625 DEGREES CELSIUS.
	RESISTANCE RA~~T~~IO RATING.~~-~~
1640	THE RESISTANCE RATIO SHALL BE ~~1640~~.
1642	THE RESISTANCE RATIO TOLERANCE SHALL BE ~~1642~~ PERCENT.
1644	STANDARD REFERENCE TEMPERATURE FOR THE RESISTANCE RATIO SPECIFIED SHALL BE 11644 DEGREES CELSIUS.
1646	EXTREME TEMPERATURE FOR THE RESISTANCE RATIO SPECIFIED SHALL BE 1646 DEGREES CELSIUS.
1648	THE EXTREME TEMPERATURE TOLERANCE SHALL BE ~~1648~~ DEGREES CELSIUS.
	VOLTAGE RATING.
7609	THE MAXIMUM VOLTAGE RATING SHALL BE 7~~609~~ VOLT (S) AC.
7610	THE MAXIMUM VOLTAGE RATING SHALL BE ~~7610~~ VOLT(S) DC.
7611	THE MAXIMUM VOLTAGE RATING SHALL BE ~~7611~~ VOLT(S) RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
MAXIMUM VOLTAGE (CONT)	
MILLIVOLTS (SELECT ONE)	
(MILLIVOLTS AC)	7612
(MILLIVOLTS DC)	7613
(MILLIVOLTS RMS)	7614
CONFIGURATION	
(ILLUSTRATION NUMBER)	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7612	THE MAXIMUM VOLTAGE RATING SHALL BE ~~7612~~ MILLIVOLTS) AC.
7613	THE MAXIMUM VOLTAGE RATING SHALL BE ~~7613~~ MILLIVOLT(S) DC.
7614	THE MAXIMUM VOLTAGE RATING SHALL BE ~~7614~~ MILLIVOLT(S) RMS.
	Configuration
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE' AS SHOWN IN ILLUSTRATION(S) 11009
7572	ALL DIMENSIONS, UNLESS OTHERWISE Specified SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE Specified SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER)	4950

NOTE : THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-350

MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)

NOTE : AUTOMATIC WHEN TABLE IX IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE : THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Finish(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE : THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS Necessary)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 1OOO HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026
RATING TEMPERATURE (DEGREES CELSIUS)	7029
ELECTRICAL STRESS (PERCENT OF RATED POWER)	7028

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION,
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6793	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
	DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:
7025	THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS .
7026	THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.
7029	THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.
7028	THE DESIGN RELIABILITY SHALL BE AT 7028 PERCENT OF THE RATED POWER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ENCLOSURE CONSTRUCTION (SELECT ONE)	
UNENCLOSED.	1680
MOLDED.	1682
ENCASED.	1684
COATED.	I686
HERMETICALLY SEALED.	1688
INSULATED.	1690
AIR-FILLED ENVELOPE.	1692
HELIUM-FILLED ENVELOPE.	1694
NITROGEN-FILLED BULB.	1696
VACUUM ENVELOPE.	1698
HEATER RESISTANCE (SELECT ONE)	
(OHMS)	1730
TOLERANCE (PERCENT)	1736
(KILOHMS)	1732
TOLERANCE (PERCENT)	1735

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1680	ENCLOSURE CONSTRUCTION, THE THERMISTOR SHALL BE UNENCLOSED.
1682	ENCLOSURE Construction THE THERMISTOR SHALL BE MOLDED.
1684	ENCLOSURE Construction THE THERMISTOR SHALL BE ENCASED.
1686	ENCLOSURE CONSTRUCTION. THE THERMISTOR SHALL BE COATED.
1688	ENCLOSURE CONSTRUCTION, THE THERMISTOR SHALL BE HERMETICALLY SEALED.
1690	ENCLOSURE CONSTRUCTION. THE THERMISTOR SHALL BE INSULATED.
1692	ENCLOSURE CONSTRUCTION. THE THERMISTOR SHALL BE IN AN AIR-FILLED ENVELOPE.
1694	ENCLOSURE CONSTRUCTION. THE THERMISTOR SHALL BE IN A HELIUM-FILLED ENVELOPE.
1696	ENCLOSURE Construction THE THERMISTOR SHALL BE IN A NITROGEN-FILLED BULB.
1698	ENCLOSURE Construction THE THERMISTOR SHALL BE IN A VACUUM ENVELOPE,
1730	HEATER RESISTANCE. THE THERMISTOR HEATER RESISTANCE SHALL BE 11730 OHM(S).
1736	HEATER RESISTANCE TOLERANCE SHALL BE 1736 PERCENT.
1732	HEATER RESISTANCE. THE THERMISTOR HEATER RESISTANCE SHALL BE 1732 KILOHM(S).
1735	HEATER RESISTANCE TOLERANCE SHALL BE 1735 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
HEATER RESISTANCE (CONT)	
(MEGOHMS)	1734
TOLERANCE (PERCENT)	1737
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
TERMINATION (SELECT ONE)	
SOLDERABLE.	1760
WELDABLE.	1762
SOLDERABLE/WELDABLE.	1764
PER MIL-STD-1276 (TYPE)	1766
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S.	
(OUNCES)	7022

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1734	HEATER. RESISTANCE. THE THERMISTOR HEATER RESISTANCE SHALL BE 1734 MEGOHM(S),
1737	HEATER RESISTANCE TOLERANCE SHALL BE 1737 PERCENT.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS,
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE Temperature THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
1760	TERMINATION. TERMINALS SHALL BE SOLDERABLE.
1762	TERMINATION. TERMINALS SHALL BE WELDABLE.
1764	TERMINATION, TERMINALS SHALL BE SOLDERABLE/WELDABLE.
1766	Termination TERMINALS SHALL BE IN ACCORDANCE WITH TYPE 1766 OF MIL-STD-1276.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM WEIGHT PER UNIT (CONT)	
SI	
(GRAMS)	7021
ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1563
RESISTANCE (OHMS)	1562
TOLERANCE (PERCENT)	1568
RESISTANCE (KILOHMS)	1564
TOLERANCE (PERCENT)	1565
RESISTANCE (MEGOHMS)	1566
TOLERANCE (PERCENT	1567
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1584
PER MIL-T-236480	1586

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
1563	ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS, THE ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1563.
1562	ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS, THE ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS SHALL BE 1562 OHM(S).
1568	ZERO-POWER RESISTANCE TOLERANCE AT 25 DEGREES CELSIUS SHALL BE 1568 PERCENT,
1564	ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS. THE ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS SHALL BE 11564 KILOHM(S).
1565	ZERO-POWER RESISTANCE TOLERANCE AT 25 DEGREES CELSIUS SHALL BE 1565 PERCENT.
1566	ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS. THE ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS SHALL BE 1566 MEGOHM(S).
1567	ZERO-POWER RESISTANCE TOLERANCE AT 25 DEGREES CELISUS SHALL BE 1567 PERCENT.
1584	ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1584.
1586	ZERO-POWER RESISTANCE AT 25 DEGREES CELSIUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-236480

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ZERO-POWER RESISTANCE AT DIFFERENT TEMPERATURES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3500
PER ZERO-POWER RESISTANCE AT DIFFERENT TEMPERATURES TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1602
PER MIL-T-23648.	1604

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1900
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3500 ZERO-POWER RESISTANCE AT DIFFERENT TEMPERATURES. THE ZERO-POWER RESISTANCE AT DIFFERENT TEMPERATURES SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3500.

ZERO-POWER RESISTANCE AT DIFFERENT TEMPERATURES. ALL THERMISTORS SHALL MEET THE REQUIREMENTS SPECIFIED IN THE ZERO-POWER RESISTANCE AT DIFFERENT TEMPERATURES TABLE.

ZERO-POWER RESISTANCE AT DIFFERENT TEMPERATURES TABLE

SEQUENCE	TEMP DEG C	FACTOR	ZERO-POWER RESISTANCE			+ OR -
			OHMS	KILOHMS	MEGOHMS	PCT TOL
1	3501	3502	3503	3504	3505	3506
2	3507	3508	3509	3510	3511	3512
3	3513	3514	3515	3516	3517	3518
4	3519	3520	3521	3522	3523	3524
5	3525	3526	3527	3528	3529	3530
6	3531	3532	3533	3534	3535	3536
7	3537	3538	3539	3540	3541	3542
8	3543	3544	3545	3546	3547	3548
9	3549	3550	3551	3552	3553	3554
10	3555	3556	3557	3558	3559	3560

1602 ZERO-POWER RESISTANCE AT DIFFERENT TEMPERATURES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1602.

1604 ZERO-POWER RESISTANCE AT DIFFERENT TEMPERATURES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-23648,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1900	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1900 PERCENT.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETERIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS,	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4874

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH ~~4859.~~
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE ~~4891~~ SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH ~~6280.~~
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN ~~6308~~ PERCENT.
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1905
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4875 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN ~~4875~~ MILLIAMPERE(S).

4847 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1905 CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1905 PERCENT.

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL PERFORMED IN ACCORDANCE WITH METH0D 301 OF MIL-STD-202.

4854 TEST VOLTAGE SHALL BE 4854 VOLTS, DC.

4855 TEST VOLTAGE SHALL BE 4855 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:59Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
POINTS OF VOLTAGE APPLICATION: (CONT)	
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
DISSIPATION CONSTANT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2022
MINIMUM DISSIPATION CONSTANT (MILLIWATTS PER DEGREE CELSIUS)	2024
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2002
PER MIL-T-23648.	2004

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE ~~4867~~ SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH ~~50000~~
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN ~~4869~~ PERCENT.
2022	DISSIPATION CONSTANT. THE REQUIREMENTS(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.
2024	DISSIPATION CONSTANT. THE DISSIPATION CONSTANT SHALL BE NOT LESS THAN 2024 MILLIWATT(S) PER DEGREE CELSIUS.
2002	DISSIPATION CONSTANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~2002.~~
2004	DISSIPATION CONSTANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-23648.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISSIPATION CONSTANT (CONT)	
PER MIL-T-23648. (CONT)	
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2006
TOLERANCE (DEGREES CELSIUS)	2008
MAXIMUM LOADING DURATION (MINUTES)	2010
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST	4761
NO EVIDENCE OR FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2006	THE CHAMBER TEMPERATURE SHALL BE 2006 DEGREES CELSIUS,
2008	CHAMBER TEMPERATURE TOLERANCE SHALL BE 2008 DEGREES CELSIUS.
2010	THE LOADING DURATION SHALL BE NOT GREATER THAN 2010 MINUTE(S).
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47540
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HIGH TEMPERATURE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2076
NO EVIDENCE OF PHYSICAL DAMAGE.	2078
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	2080
REMAIN WITHIN SPECIFIED Tolerance	2082
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2084
NO EVIDENCE OF FLASHOVER, ARCING, OR INSULATION BREAKDOWN AFTER DWV TEST,	2086
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2052
PER MIL-T-23648.	2054
TEST TEMPERATURE (DEGREES CELSIUS)	2056
TOLERANCE (DEGREES CELSIUS)	2059
DURATION (HOURS)	2062
TOLERANCE (HOURS)	2064

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2076	HIGH TEMPERATURE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2076.
2078	HIGH TEMPERATURE EXPOSURE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2080	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 2080 PERCENT.
2082	THERMISTORS SHALL REMAIN WITHIN SPECIFIED Tolerance
2084	INSULATION RESISTANCE SHALL BE NOT LESS THAN 2084 MEGOHM(S) AFTER TEST.
2086	THERE SHALL BE NO EVIDENCE OF FLASHOVER, ARCING, OR INSULATION BREAKDOWN AFTER THE DIELECTRIC WITHSTANDING VOLTAGE TEST.
2052	HIGH TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052,
2054	HIGH TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-23648.
2056	TEST TEMPERATURE SHALL BE 2056 DEGREES CELSIUS.
2059	TEST TEMPERATURE TOLERANCE SHALL BE 2059 DEGREES CELSIUS,
2062	TEST DURATION SHALL BE 2062 HOUR(S).
2064	TEST DURATION TOLERANCE SHALL BE 2064 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HIGH TEMPERATURE STORAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2132
NO EVIDENCE OF PHYSICAL DAMAGE.	2134
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	2136
REMAIN WITHIN SPECIFIED TOLERANCE.	2138
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2112
PER MIL-T-23648.	21L4
STORAGE TEMPERATURE (DEGREES CELSIUS)	2116
TOLERANCE (DEGREES CELSIUS)	2118
STORAGE DURATION (HOURS)	2120
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCES	4822

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2132	HIGH TEMPERATURE STORAGE, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 21132.
2134	HIGH TEMPERATURE STORAGE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2136	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 2136 PERCENT.
2138	THERMISTORS SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2112	HIGH TEMPERATURE STORAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2112.
2114	HIGH TEMPERATURE STORAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-23648.
2116	STORAGE TEMPERATURE SHALL BE 2116 DEGREES CELSIUS.
2118	STORAGE TEMPERATURE TOLERANCE SHALL BE 2118 DEGREES CELSIUS.
2120	STORAGE DURATION SHALL BE 2120 HOUR(S).
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE, (CONT)	
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1910
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4832
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1380
AS FOLLOWS:	6359

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 4825 MEGOHM(S).
1910	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1910 PERCENT.
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER THE FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
*MINIMUM Insulation RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1920
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 Megohms
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE,
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST Temperature
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED Tolerance
1920	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1920 PERCENT.
1371	INSULATION Resistance TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 Second
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	11497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
LOW TEMPERATURE STORAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2222
NO EVIDENCE OF PHYSICAL DAMAGE.	2224
MAXIMUM ZERO-POWER RESISTANCE CHANGE (PERCENT)	2226
REMAIN WITHIN SPECIFIED TOLERANCE,	2228

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE,
1522	BETWEEN MUTUALLY INSULATED PARTS,
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS,
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2222	LOW TEMPERATURE STORAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2222.
2224	LOW TEMPERATURE STORAGE, THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2226	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 2226 PERCENT.
2228	THERMISTORS SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW TEMPERATURE STORAGE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2202
PER MIL-T-23648.	2204
STORAGE TEMPERATURE (DEGREES CELSIUS)	2206
TOLERANCE (DEGREES CELSIUS)	2208
STORAGE DURATION (HOURS)	2210
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE .	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2202	LOW TEMPERATURE STORAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 22020
2204	LOW TEMPERATURE STORAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-23648.
2206	STORAGE TEMPERATURE SHALL BE 2206 DEGREES CELSIUS,
2208	STORAGE TEMPERATURE TOLERANCE SHALL BE 2208 DEGREES CELSIUS.
2210	STORAGE DURATION SHALL BE 2210 HOUR(S).
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1925
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
1925	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1925 PERCENT.
1391	MOISTURE RESISTANCE- TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED.	4858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD, PARAGRAPH
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.
6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).
4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.
6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285
VIEWING EQUIPMENT (IDENTIFY) ____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) ____	6289
NONFILM TECHNIQUES ALLOWED,	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202,
6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).
6285	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCHES.
6287	THE VIEWING EQUIPMENT SHALL BE 6287.
6288	THE IMAGES SHALL BE VIEWED AT 6288 X-POWER Magnification
6289	THE DEFECTS TO BE SOUGHT SHALL BE 6289.
6284	NONFILM Techniques MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED? FOR EXAMINATION OR DELIVER, AS SPECIFIED.
6283	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
PENETRAMETER WIRE SIZE (CONT)	
(MILLIMETERS)	5297
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6929
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
REMAIN WITHIN SPECIFIED TOLERANCE.	6937
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	2300
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696
PER MIL-STD-202, METHOD 108.	6697

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD. PARAGRAPH	
5297	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.	
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, Stabilization LOAD LIFE, OVERLOAD)-	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.
6930	RELIABILITY _SCREENING (BURN-IN? AGEING, Conditioning STABILIZATION, LOAD LIFE, OVERLOAD).	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6937	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES	
2300	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 2300 PERCENT.	
6696	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD).	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.
6697	RELIABILITY SCREENING (BURN-IN, AGEING, conditioning STABILIZATION, LOAD LIFE, OVER LOAD),	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-2020

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0,5 HOUR OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707
ELECTRICAL LOAD (OHMS)	6920
MEASUREMENT INTERVALS (HOURS)	6922
MOUNT PER DOCUMENT (DOC DES)	6924
ZERO-POWER RESISTANCE MEASURED AT THE END OF OFF PERIODS AFTER (HOURS)	2284

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6698	TEST CONDITION LETTER 6698 HOUR(S).
6699	DURATION OF THE TEST SHALL BE 6699 HOUR(S).
6710	DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.
6713	DUTY CYCLE SHALL BE STEADY STATE.
6700	TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.
6701	TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.
6923	TEST CHAMBER SHALL HAVE STILL AIR.
6921	ITEM(S) SHALL BE TESTED AT 6923 TIMES THE RATED POWER,
6939	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS.
6706	TEST POTENTIAL SHALL BE 6706 VOLTS, AC.
6707	TEST POTENTIAL SHALL BE 6707 VOLTS, DC.
6920	THE ELECTRICAL LOAD SHALL BE 6920 OHMS.
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST.
6924	MOUNTING SHALL BE IN ACCORDANCE WITH 6924.
2284	ZERO-POWER RESISTANCE SHALL BE MEASURED DURING OFF PERIODS AFTER 2284 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX, (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE*	4718
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1930
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 21O.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED,	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:59Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47000
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED Tolerance
1930	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1930 PERCENT.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
46911	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 Millimeter
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE Permitted
4989	SPECIAL PREPARATIONS SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE,	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENT(S) TO BE ADDED (NAME)	4838
SOLVENT(S) TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF Performance
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829,
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL BE NOT USED.
48311	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT. SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION? PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 47700
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD,
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47450
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
AS FOLLOWS: (CONT)	
SPECIFIED TEST METHOD SENSITIVITY,	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112,	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE sensitivity (ATM CC/SEC)	4741

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4746	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD Sensitivity
4748	THERE SHALL BE NO BUBBLES INDICATIVE Of- LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202,
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER C. (CONT)	
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S),
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 47511 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE IV. (CONT)	
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
NO DISCONTINUITY DURING TEST.	1451
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	11935
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
1935	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1935 PERCENT.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1945
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH ~~1468.~~
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1508.~~
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1945	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1945 PERCENT.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1502.~~
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
PER MIL-STD-202, METHOD 213. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD:	4685
MOUNT PER DOCUMENT (DOC DES)	4684
SHORT TIME LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2372
NO EVIDENCE OF PHYSICAL DAMAGE.	2374
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	2376
REMAIN WITHIN SPECIFIED TOLERANCE.	2378
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2342
PER MIL-T-23648.	2344
PERCENT OF RATED POWER APPLIED (PERCENT)	2346
TEST TEMPERATURE (DEGREES CELSIUS)	2348

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 46840
2372	SHORT TIME LOAD, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 23720
2374	SHORT TIME LOAD. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2376	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 2376 PERCENT.
2378	THERMISTORS SHALL REMAIN WITHIN SPECIFIED Tolerance
2342	SHORT TIME LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2342.
2344	SHORT TIME LOAD, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-23648.
2346	POWER SHALL BE APPLIED AT 2346 PERCENT OF RATED POWER.
2348	THE TEST TEMPERATURE SHALL BE 2348 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:59Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHORT TIME LOAD (CONT)	
PER MIL-T-23648. (CONT)	
ENERGIZING DUTY DYCLE	
ON (MINUTES)	2350
*OFF (MINUTES)	2352
DUTY CYCLES (NUMBER)	2354
ZERO-POWER RESISTANCE MEASURED AFTER FINAL CYCLE WITHIN (MINUTES)	2356
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1950
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2350 2352	THE ENERGIZING DUTY CYCLE SHALL BE 2350 MINUTE(S) ON AND 2352 MINUTE(S) OFF.
2354	THERE SHALL BE 2354 DUTY CYCLE(S) PERFORMED.
2356	ZERO-POWER RESISTANCE SHALL BE MEASURED AFTER FINAL CYCLE WITHIN 2356 MINUTE(S).
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE .
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1950	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1950 PERCENT,
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662,
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL-STD-202, METHOD 208. (CONT)	
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSCIAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1955

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1955	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1955 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITIONS A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	**1411**
(NEWTONS)	**1419**
TEST CONDITION B, BENDS (NUMBER)	**1412**
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(GRAMS)	1580
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	**1416**
(NEWTON METERS)	**1421**

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1580	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1580 GRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1960
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	47113
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
PER MIL-T-23648.	2400
IMMERSION MEDIA PRECONDITIONING TEMPERATURE (DEGREES CELSIUS)	2402
TOLERANCE (DEGREES CELSIUS)	2405

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1960	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1960 PERCENT.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
2400	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-23648.
2402	PRECONDITIONING IMMERSION MEDIA TEMPERATURE SHALL BE 2402 DEGREES CELSIUS.
2405	PRECONDITIONING IMMERSION MEDIA TEMPERATURE TOLERANCE SHALL BE 2405 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
PER MIL-T-23648. (CONT)	
MINIMUM DURATION OF IMMERSION (SECONDS)	2408
IMMERSION MEDIA LOW TEMPERATURE (DEGREES CELSIUS)	2410
TOLERANCE (DEGREES CELSIUS)	2413
MINIMUM DURATION OF IMMERSION (SECONDS)	2416
IMMERSION MEDIA HIGH TEMPERATURE (DEGREES CELSIUS)	2418
TOLERANCE (DEGREES CELSIUS)	2421
MINIMUM DURATION OF IMMERSION (SECONDS)	2424
TEST CYCLES (NUMBER)	2426
IMMERSION MEDIA	
PREDONDITIONING MEDIA ____	2427
LOW TEMPERATURE MEDIA ____	2428
HIGH TEMPERATURE MEDIA ____	2429

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2408	DURATION OF IMMERSION FOR PRECONDITIONING SHALL BE NOT LESS THAN 2408 SECOND(S).
2410	IMMERSION MEDIA LOW TEMPERATURE SHALL BE 2410 DEGREES CELSIUS.
2413	IMMERSION MEDIA LOW TEMPERATURE TOLERANCE SHALL BE 2413 DEGREES CELSIUS.
2416	DURATION OF IMMERSION IN LOW TEMPERATURE MEDIA SHALL BE NOT LESS THAN 2416 SECOND(S).
2418	IMMERSION MEDIA HIGH TEMPERATURE SHALL BE 2418 DEGREES CELSIUS.
2421	IMMERSION MEDIA HIGH TEMPERATURE TOLERANCE SHALL BE 2421 DEGREES CELSIUS.
2424	DURATION OF IMMERSION IN HIGH TEMPERATURE MEDIA SHALL BE NOT LESS THAN 2424 SECOND(S).
2426	THERE SHALL BE 2426 TEST CYCLE(S) PERFORMED.
2427	THE PRECONDITIONING IMMERSION MEDIA SHALL BE 2427.
2428	THE LOW TEMPERATURE IMMERSION MEDIA SHALL BE 2428.
2429	THE HIGH TEMPERATURE IMMERSION MEDIA SHALL BE 2429.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL TIME CONSTANT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2478
MAXIMUM THERMAL TIME CONSTANT (SECONDS)	2480
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2452
PER MIL-T-23648.	2454
*PROCEDURE (SELECT ONE)	
PROCEDURE 1, FOR DISKS, RODS, AND BEADS.	2456
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2460
PROCEDURE 2, FOR BEADS IN PROBES AND RODS.	2462
IMMERSION MEDIA (NAME) .	2464
IMMERSION MEDIA TEMPERATURE (DEGREES CELSIUS)	2466
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2468

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2478	THERMAL TIME CONSTANT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2478.
2480	THERMAL TIME CONSTANT. THE THERMAL TIME CONSTANT SHALL BE NOT GREATER THAN 2480 SECOND(S).
2452	THERMAL TIME CONSTANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2452.
2454	THERMAL TIME CONSTANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-23648.
2456	PROCEDURE 1 SHALL APPLY.
2460	THE TEST CHAMBER TEMPERATURE SHALL BE 2460 DEGREES CELSIUS.
2462	PROCEDURE 2 SHALL APPLY.
2464	THE IMMERSION MEDIA SHALL BE 2464.
2466	THE IMMERSION MEDIA TEMPERATURE SHALL BE 2466 DEGREES CELSIUS.
2468	THE TEST CHAMBER TEMPERATURE SHALL BE 2468 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	**1473**
REMAIN WITHIN SPECIFIED TOLERANCE.	**1469**
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1965
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 2040	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUTNING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1965	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1965 PERCENT.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 204. (CONT)	
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1970
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1970	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1970 PERCENT.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 201. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHODS.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
MAXIMUM CHANGE IN ZERO-POWER RESISTANCE (PERCENT)	1975
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF Application (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD _ PARAGRAPH
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN ~~1545~~ MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN ~~1546~~ MICROSECOND(S).
1975	CHANGE IN ZERO-POWER RESISTANCE SHALL BE NOT GREATER THAN 1975 PERCENT.
1426	VIBRATION? RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1426.~~
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUTNING METHOD.	4977
NORMAL MOUTNING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE X IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A _____	7001
B _____	7002
c _____	7003
D _____	7004
E _____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A _____	6991
B _____	6992
c _____	6993
D _____	6994
E _____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870,
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART. MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEFINITION OF HERMETIC SEALING	
NOTE : AUTOMATIC WHEN CODE 1688 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army -AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A267)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

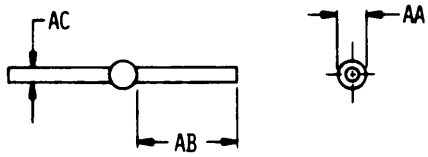


004-01-1

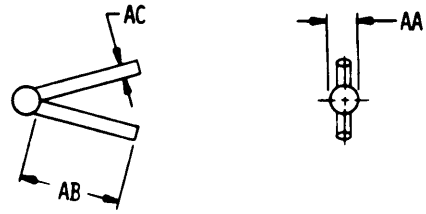

004-01-2

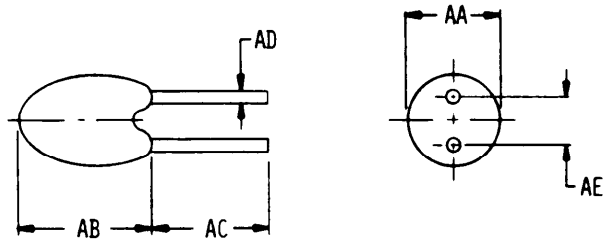


004-01-3

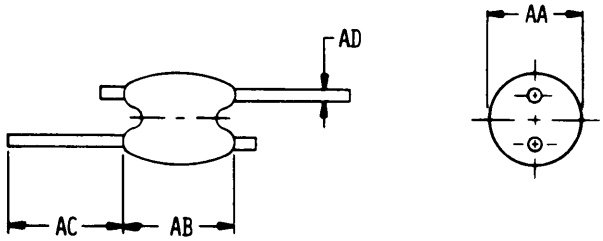


004-01-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

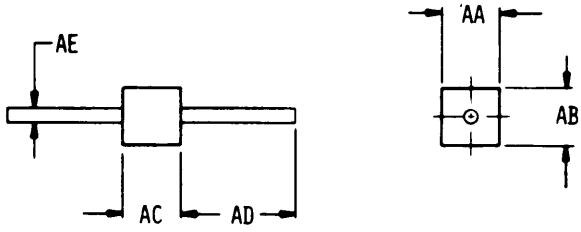


004-02-1

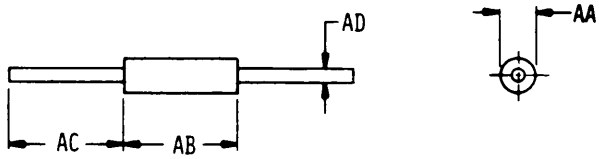

004-03-1

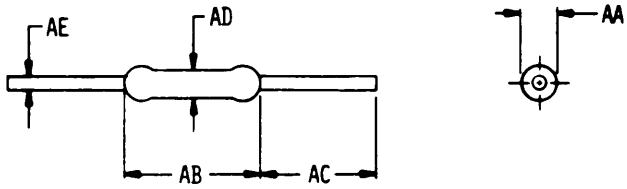


004-03-2

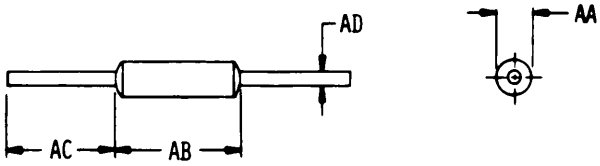


004-03-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

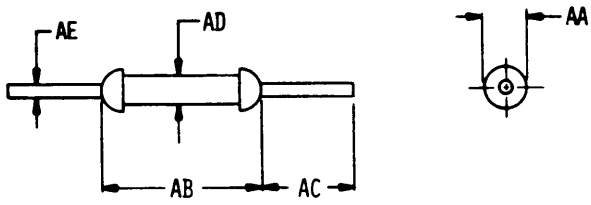

004-03-4

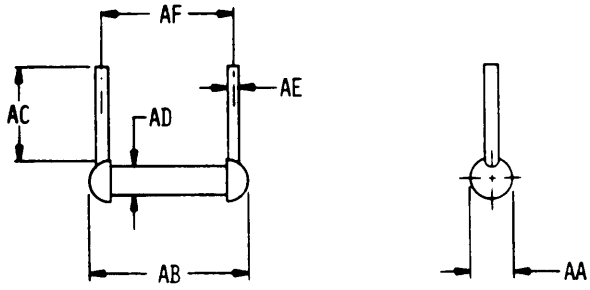


004-03-5

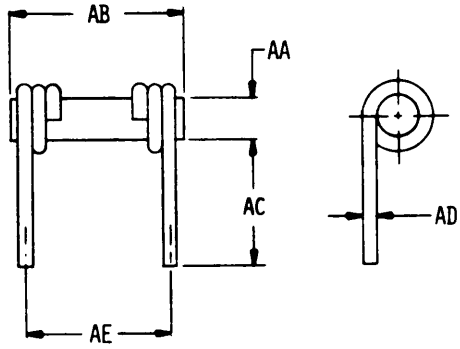


004-03-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

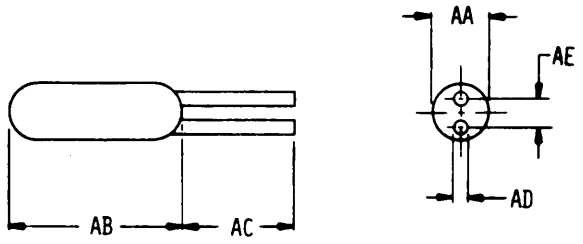

004-04-1

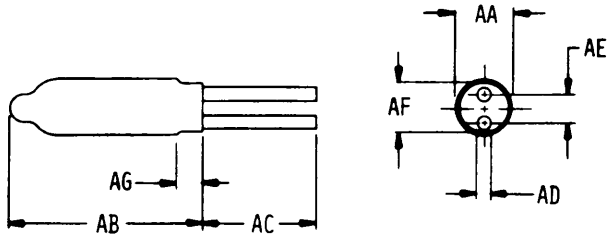


004-04-2

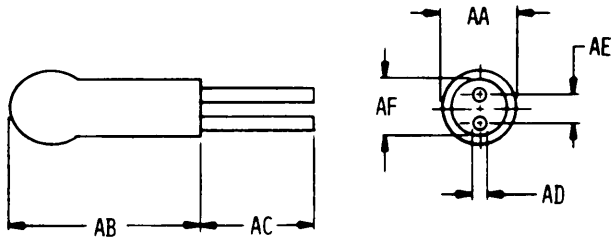


004-04-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

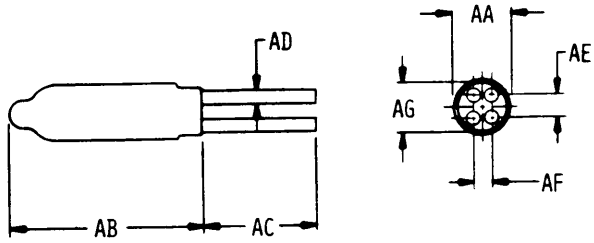

004-04-4

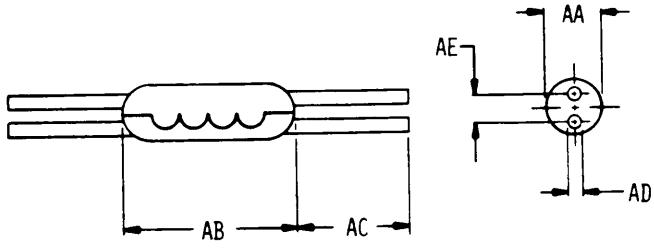


004-04-5

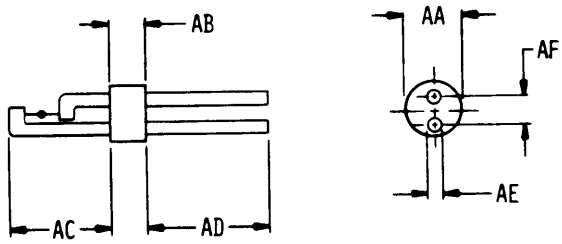


004-04-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

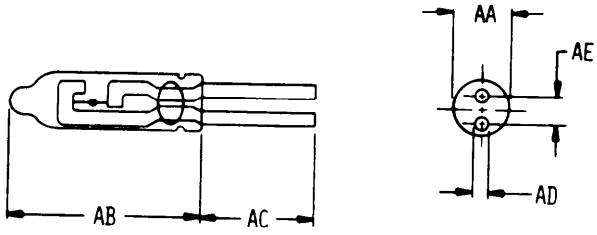

004-04-7

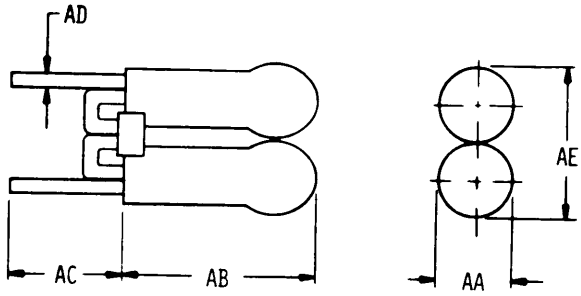


004-04-8

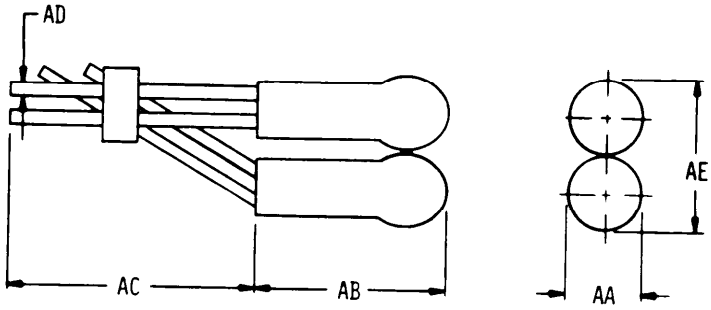


004-04-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

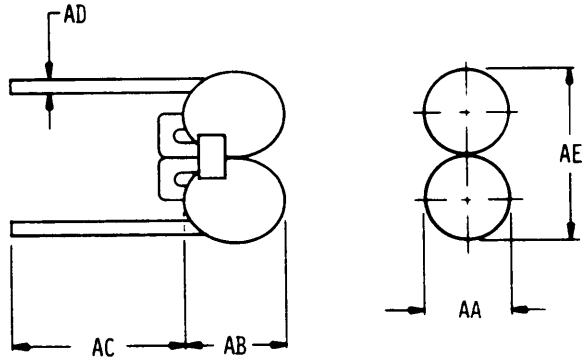

004-04-10

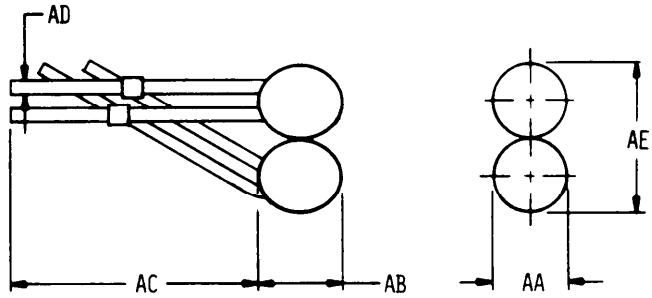


004-04-11

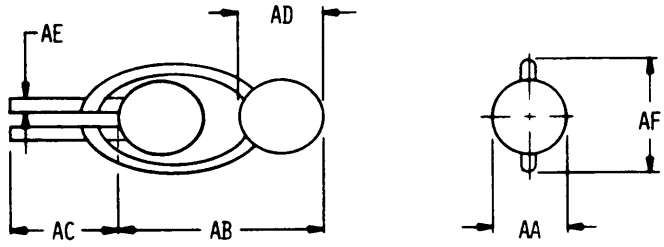


004-04-12


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

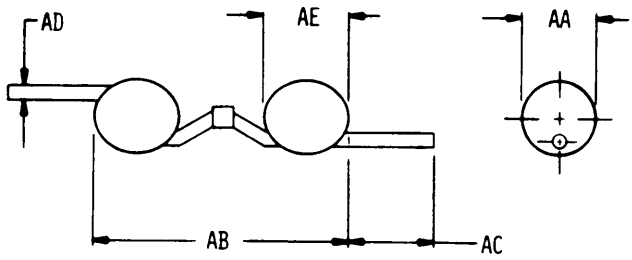

004-04-13

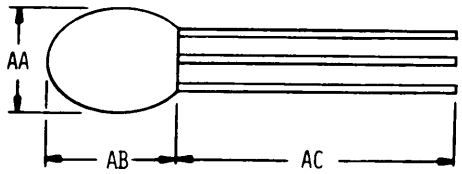


004-04-14

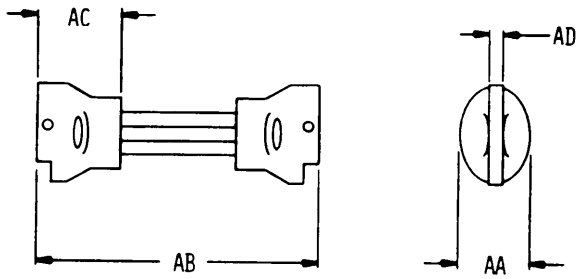


004-05-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

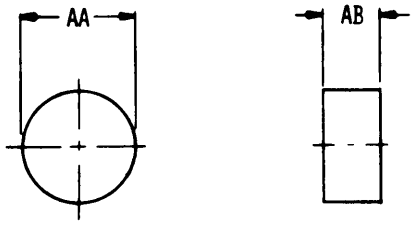


004-06-1

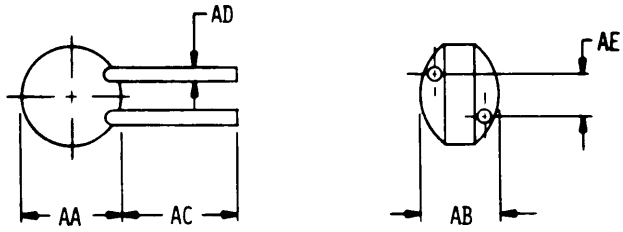

004-06-2

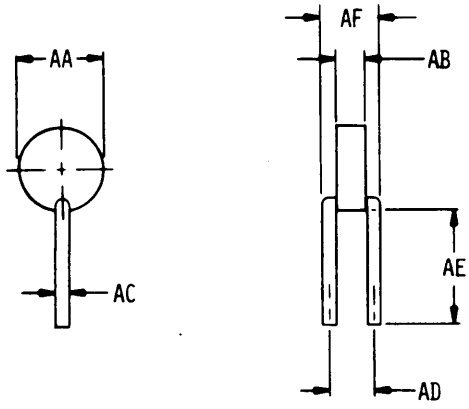


004-06-3

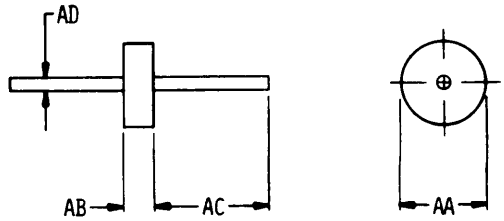


004-06-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

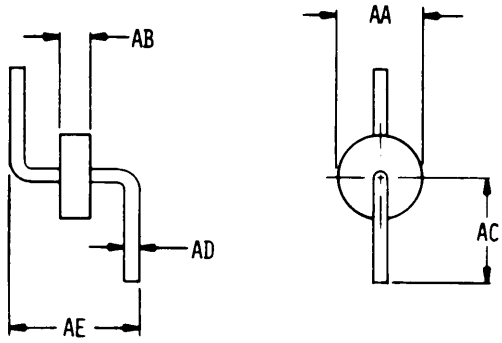

004-06-5

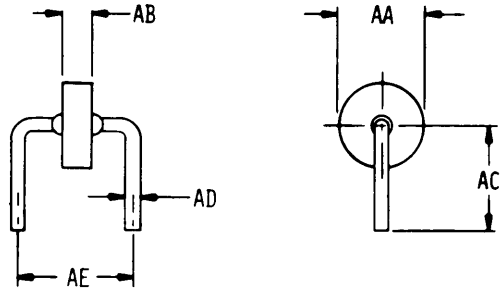


004-06-6

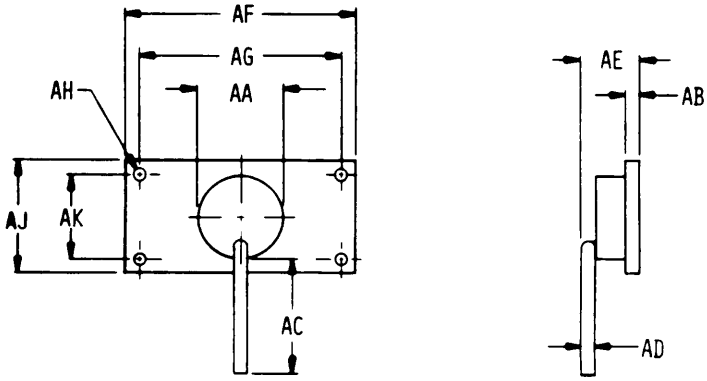


004-06-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

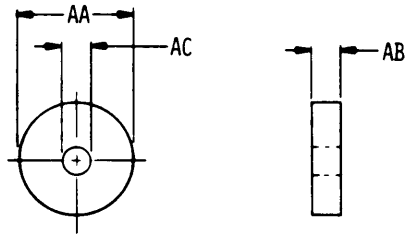

004-07-1

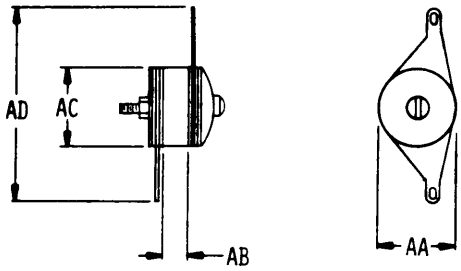


004-07-2

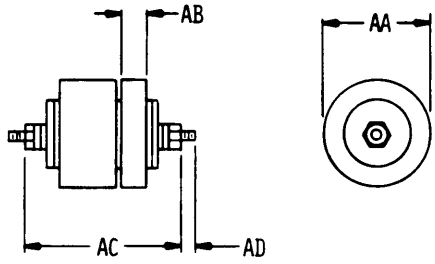


004-07-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

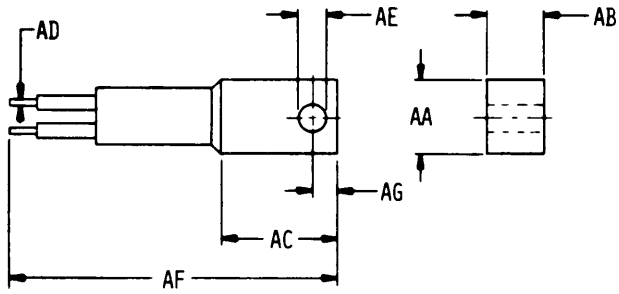


004-08-1

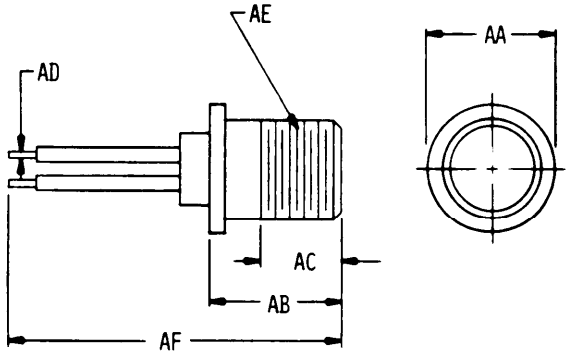


004-08-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

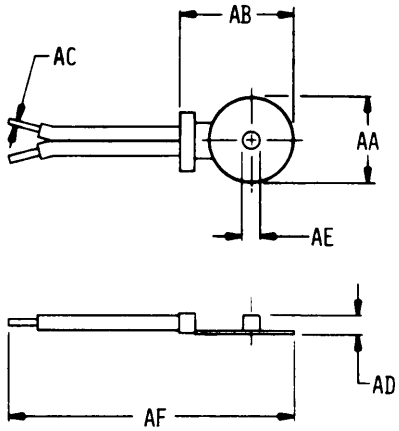

004-08-3

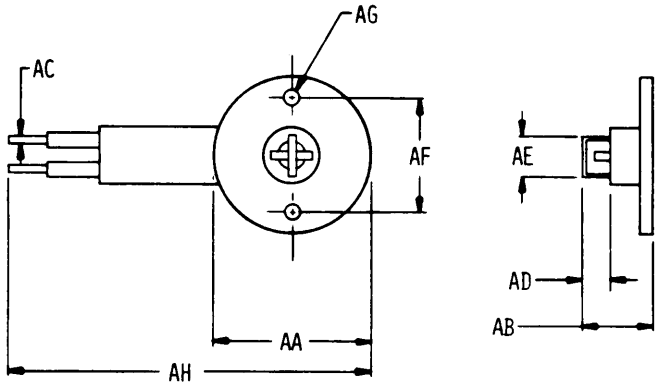


004-08-4

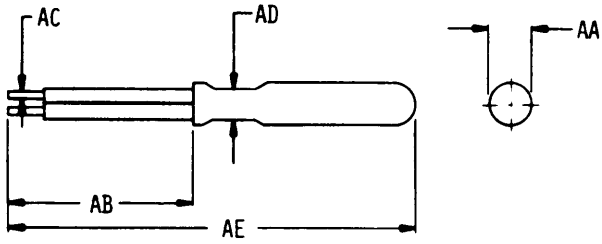


004-08-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

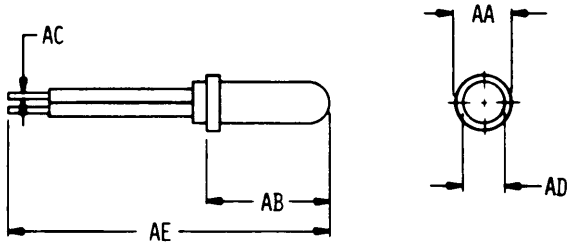

004-08-6

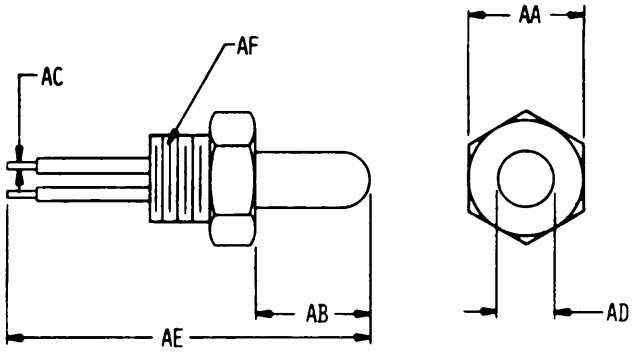


004-08-7

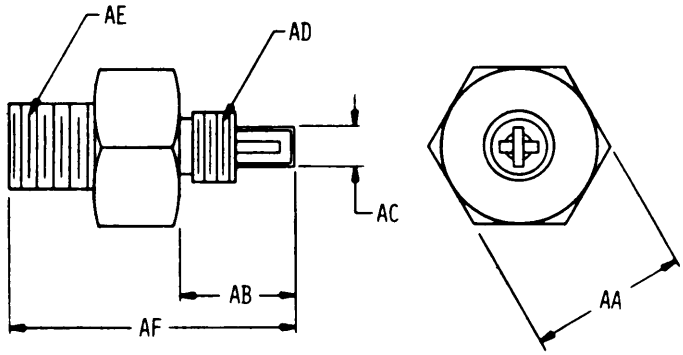


004-08-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

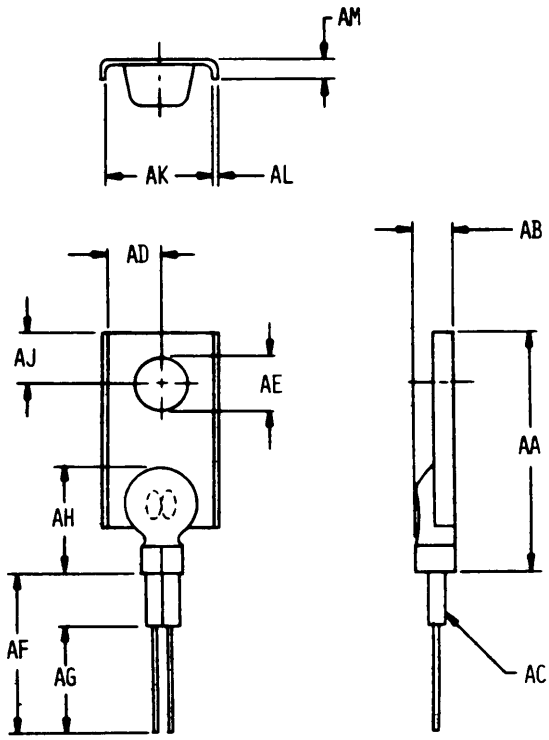


004-08-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

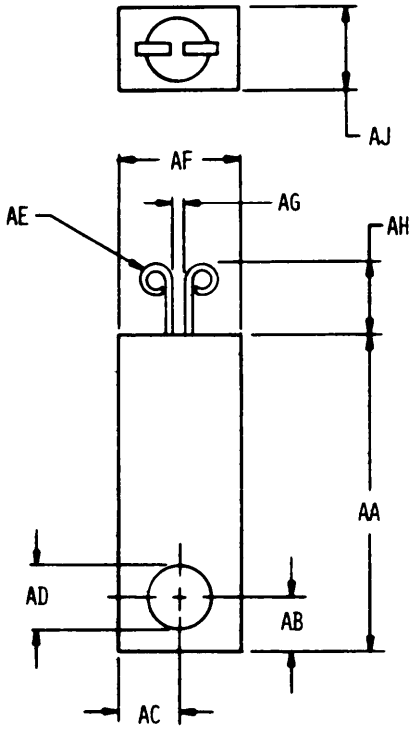

004-08-10

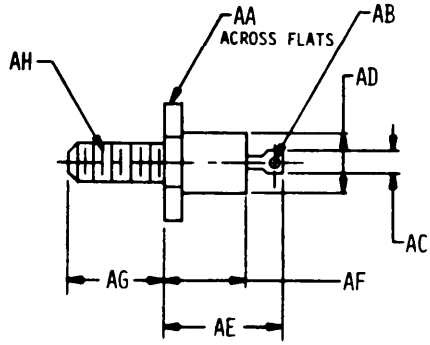

004-08-11

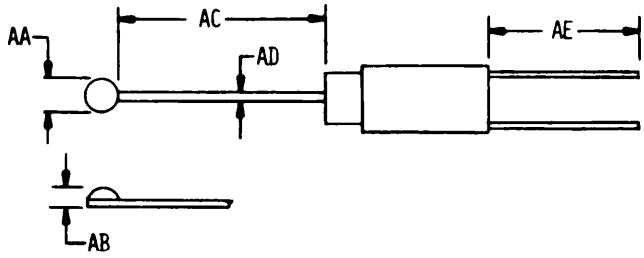

004-08-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE.	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1411	86	1476	96	1596	16
0102	12	1412	86	1478	78	1602	32
0103	12	1413	86	1480	96	1604	32
0104	12	1414	86	1482	76	1620	16
0105	12	1416	86	1486	76	1622	19
0107	14	1418	84	1488	78	1623	18
0108	14	1419	86	1490	96	1624	16
0700	12	1421	86	1494	76	1625	18
0000	12	1426	100	1495	76	1626	16
1003	12	1427	100	1497	52	1640	18
1004	12	1428	100	1499	52	1642	18
1005	12	1429	54	1500	78	1644	18
1006	12	1430	102	1502	78	1646	18
1008	12	1431	180	1504	78	1648	18
1009	20	1432	56	1508	78	1680	26
1371	50	1433	84	1509	78	1682	26
1372	52	1435	98	1511	50	1684	26
1373	50	1436	100	1520	52	1686	26
1374	100	1438	100	1522	52	1688	26
1375	66	1439	102	1523	52	1690	26
1376	50	1446	94	1533	96	1692	26
1377	50	1447	94	1534	96	1694	26
1378	50	1448	94	1535	98	1696	26
1380	48	1449	56	1536	98	1698	26
1381	52	1451	76	1537	98	1730	26
1383	52	1452	102	1538	100	1732	26
1384	50	1453	102	1545	100	1734	28
1386	50	1455	94	1546	100	1735	26
1367	50	1456	94	1562	30	1736	26
1308	50	1459	102	1563	30	1737	28
1391	56	1462	102	1564	30	1760	28
1394	54	1464	76	1565	30	1762	28
1395	56	1466	96	1566	30	1764	28
1396	54	1467	96	1567	30	1766	28
1397	56	1468	78	1568	30	1900	34
1398	54	1469	94	1570	16	1905	38
1400	54	1470	96	1571	16	1910	48
i404	54	1471	78	1580	86	1920	50
1406	56	1473	94	1584	30	1925	56
1410	86	1475	96	1586	30	1930	66

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE.	PAGE NO.
1935	76	2208	54	2466	92	3536	133
1945	78	2210	54	2468	92	3537	133
1950	82	2222	52	2478	92	3538	133
1955	84	2224	52	248O	92	3539	133
1960	88	2226	52	3500	32	3540	133
1965	94	2228	52	3501	33	3541	133
1970	96	2284	64	3502	33	3542	133
1975	100	2300	62	3503	33	3543	133
1986	56	2342	89	3504	33	3544	133
2002	40	2344	80	3505	33	3545	133
2004	40	2346	80	3506	33	3546	133
2096	42	2348	80	3507	33	3547	133
2008	42	2350	82	3508	33	3548	133
2010	42	2352	82	3509	33	3549	133
2022	40	2354	82	3510	33	3550	133
2024	40	2356	82	3511	33	3551	133
2034	46	2372	80	3512	33	3552	133
2052	44	2374	80	3513	33	3553	133
2054	44	2376	80	3514	33	3554	133
2056	44	2378	80	3515	33	3555	133
2059	44	2400	86	3516	33	3556	133
2062	44	2402	88	3517	33	3557	133
2064	44	2405	88	3518	33	3556	133
2076	44	2408	90	3519	33	3559	133
2078	44	2410	90	3520	33	3560	133
2080	44	2413	90	3521	33	4662	82
2082	44	2416	90	3522	33	4663	84
2084	44	2418	90	3523	33	4664	84
2086	44	2421	90	3524	33	4665	84
2112	46	2424	90	3525	33	4666	84
2114	46	2426	90	3526	33	4667	84
2116	46	2427	90	3527	133	4669	66
2118	46	2428	90	3524	133	4671	66
2120	46	2429	90	3529	133	4672	82
2132	46	2452	92	3538	133	4674	82
2136	46	2454	92	3531	133	4675	82
2138	46	2456	92	3532	133	4677	82
2202	54	2460	92	3533	133	4683	82
2204	54	2462	92	3534	133	4684	80
2206	54	2464	92	3535	133	4685	80

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:59Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE.	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4686	80	4751	74	4854	38	6282	58
4689	56	4752	74	4855	38	6283	60
4691	66	4754	42	4856	38	6284	60
4692	66	4755	42	4857	58	6285	68
4694	66	4756	42	4858	58	6286	60
4695	66	4760	42	4859	36	6287	60
4698	66	4761	42	4861	38	6288	60
4708	66	4762	42	4862	38	6289	60
4701	66	4765	70	4867	40	6291	58
4703	78	4766	70	4869	46	6292	36
4707	94	4720	70	4874	36	6293	36
4708	94	4171	70	4875	38	6294	36
4709	94	4772	70	4870	70	6296	84
4713	88	4173	70	4884	34	6300	34
4714	88	47B2	70	4885	36	6308	36
4715	88	4809	48	4886	34	6311	36
4718	66	4810	48	4891	36	6312	36
4719	88	4811	48	4894	34	6320	72
4722	88	4814	48	4901	34	6321	72
4723	88	4819	46	4906	34	6322	72
4726	88	4820	46	4908	34	6323	72
4729	98	4822	46	4950	22	6324	74
4730	98	4825	48	4975	102	6325	74
4731	98	4829	68	4976	102	6326	74
4732	72	4830	68	4977	102	6328	74
4734	72	4831	68	4978	96	6329	74
4735	74	4834	68	4979	98	6330	76
4736	76	4835	68	4980	56	6331	76
4737	72	4836	68	4901	56	6332	76
4738	72	4838	60	4983	58	6333	76
4739	72	4839	68	4984	58	6359	48
4740	74	4842	38	4985	56	6369	12
4741	72	4843	60	4989	66	6370	70
4742	74	4844	40	4991	56	6371	58
4743	76	4845	40	5000	40	6372	104
4745	70	4846	40	5297	62	6696	62
4746	72	4847	38	6200	94	6697	62
4748	72	4848	40	6205	84	6698	64
4749	74	4849	34	6279	60	6699	64
4750	74	4850	40	6280	36	6700	64

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6701	64	7028	24				
6706	64	7029	24				
6707	64	?572	20				
6718	64	7573	20				
6713	64	7574	20				
6790	24	7576	20				
6791	24	7577	20				
6792	24	7578	20				
6793	24	7580	24				
6794	28	7594	16				
6795	28	7595	16				
6799	28	7597	16				
6801	26	7598	16				
6870	104	7609	18				
6873	12	7610	18				
6874	14	7611	18				
6920	64	7612	20				
6921	64	7613	20				
6922	64	7614	20				
6923	64	7629	104				
6924	64	7630	104				
6929	62						
6938	62						
693?	62						
6939	64						
6941	14						
6942	14						
6992	104						
6993	10 *b*						
6994	104						
6995	104						
7001	104						
7082	104						
7003	104						
7004	104						
7005	104						
7021	30						
7022	28						
7025	24						
7026	24						

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	104
Additional Requirements	104
Altitude	24
Aperture Cards Required	14
Applicable Documents	106
Base Document	12
City, State, Zip	12
Classification	16
Company Name/Command	12
Configuration	20
Contract Number/Office Symbol	12
Control	12
Current Rating	16
Date	12
Definition of Hermetic Sealing	106
Design and Construction	24
Design Reliability	24
Dielectric Withstanding Voltage at Reduced Barometric Pressure	34
Dielectric Withstanding Voltage at Sea Level	36
Dissipation Constant	40
Enclosure Construction	26
Finishes	22
Format	12
Fungus	42
Government Design Activity FSCM	12
Heater Resistance	26
High Temperature Exposure	44
High Temperature Storage	46
Illustrations	22
Immersion	46
Insulation Resistance	48
Lead Type	16
Low Temperature Storage	52
Materials	22
Metals	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Moisture Resistance	54
Mounting Hardware	102
Nomenclature	106
Notes	106
Packaging	106
Part Marking	104
Part Number	14
Part Number Cross-Reference	106
Phone Number	12
Power Rating	16
Quality Assurance Provisions	106
Radiographic	58
Ratings	16
Reliability Screening	62
Requester FSCM	12
Requester's Name	12
Resistance Ratio Rating	18
Resistance to Soldering Heat	66
Resistance to Solvents	68
Resistance Tolerance	16
Revision of AEDPS Document Number	14
Salt Spray	70
Scope	14
Seal	70
Shock, High Impact	76
Shock, Specified Pulse	78
Short Time Load	80
Solderability	82
Source Table	14
Street/Building	12
Style	16
Superseded Document	106
System Application	12
Tabulated Characteristics	22
Temperature	28
Termination	23
Terminal Strength	84
Thermal Shock (Temperature Cycling)	88
Thermal Time Constant	92

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Units of Measure- 14, 20

Vibration, High Frequency- 94
Vibration, Low Frequency- 96
Vibration, Random- 98
Voltage Rating- 18

Weight- 28
Workmanship- 104

Zero-Power Resistance at Different Temperatures- - - -- - - - - '32
Zero-Power Resistance at 25 Degrees Celsius- - - - - - - - - - - 30

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16
*REQUESTER'S NAME		Ø 1 Ø 1
*COMPANY NAME/COMMAND		Ø 1 Ø 2
*STREET/BUILDING		Ø 1 Ø 3
*CITY, STATE, ZIP		Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5
*DATE		1 Ø Ø 3
*REQUESTER FSCM		1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5
*BASE DOCUMENT		1 Ø Ø 6
*SYSTEM APPLICATION		1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø
ONE SECTION DOCUMENT.		Ø 8 Ø Ø
SEARCH ONLY.		Ø 1 Ø 6
APERTURE CARDS REQUIRED.		Ø 1 Ø 7
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8
*CONTROL SOURCE.		6 8 7 3
SPECIFICATION.		6 8 7 4
*SOURCE TABLE		9 1 5 1
UNIT OF MEASURE U.S.		6 9 4 1
SI.		6 9 4 2

CHARACTERISTIC VALUE

20 25 30 35 40 45 50 55 60 65 70 75 79 LINE NO. 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (O)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80


*MANDATORY

DOD-STD-35 170378

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

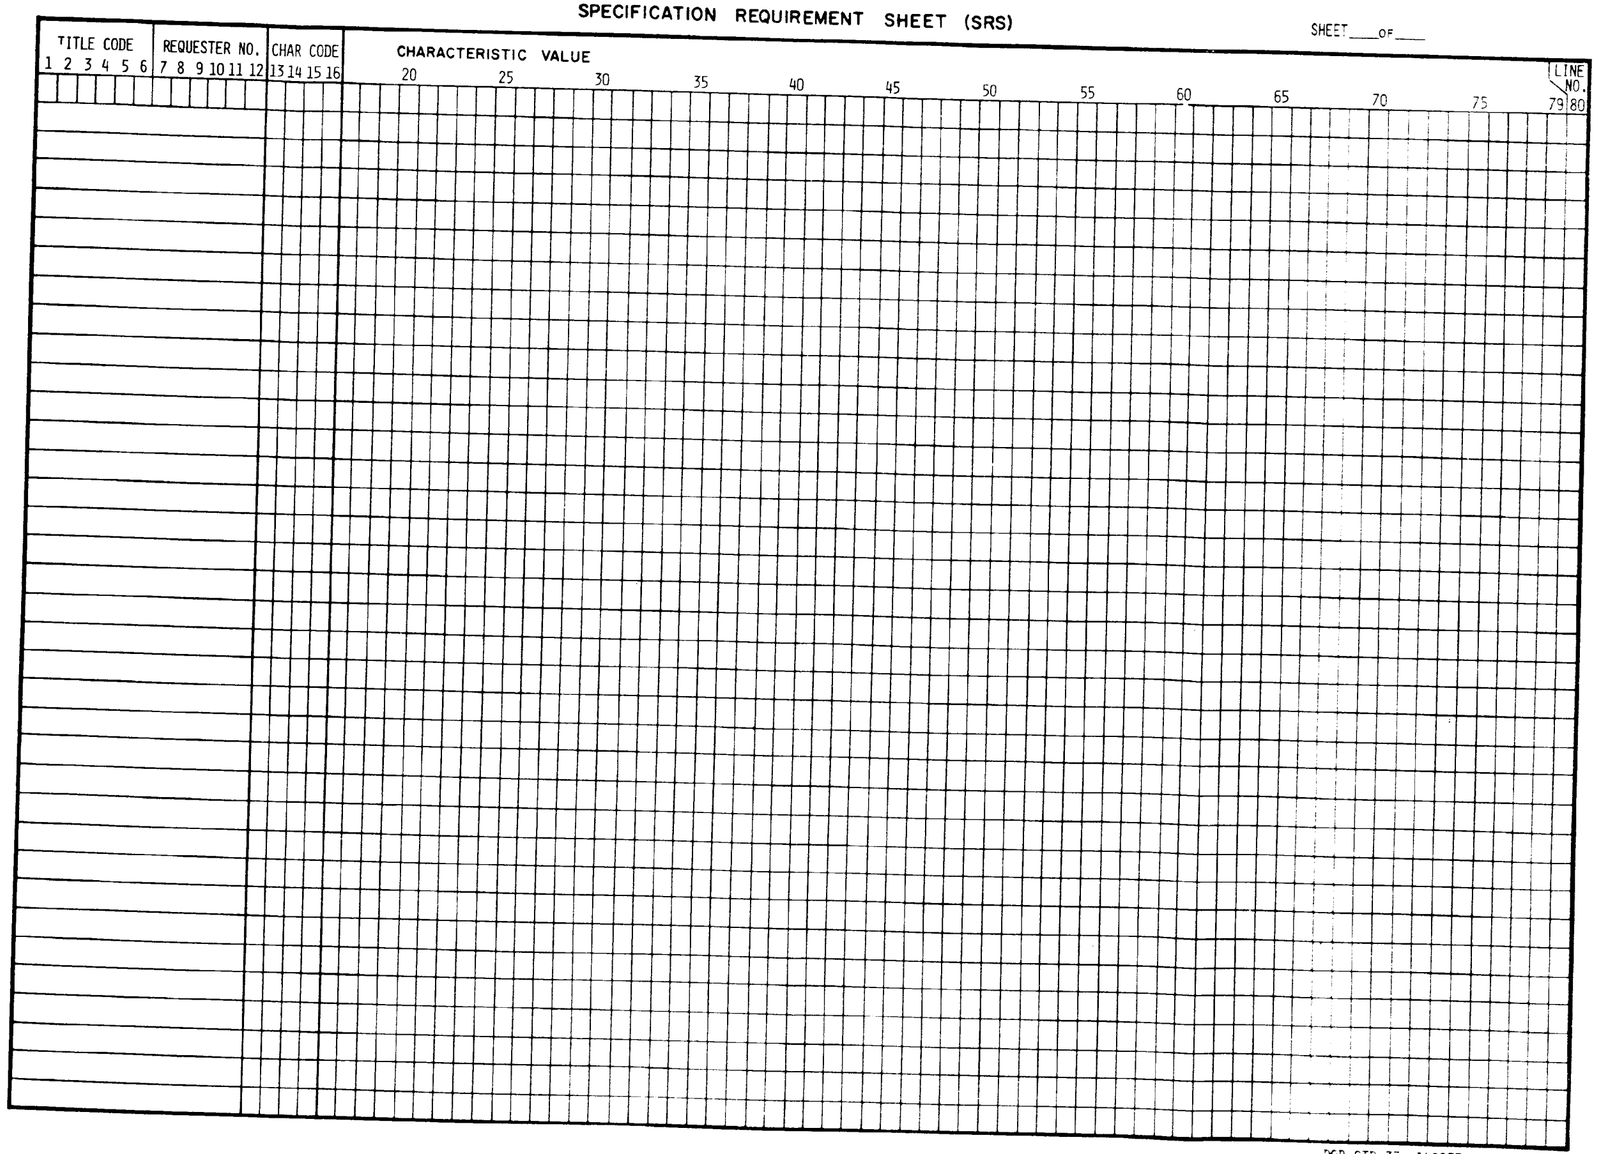

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:59Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:59Z
Check the source to verify that this is the current version before use.

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



FFICIAL BUSINESS
TY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:59Z
Check the source to verify that this is the current version before use.