MIL-D-63199A(AR)
30 September 1985
SUPERSEDING
MIL-D-63199(AR)
15 July 1977

MILITARY SPECIFICATION

DISPENSER, GENERAL PURPOSE, AIRCRAFT: M130; REPAIR PARTS FOR

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the inspection of repair parts used for the M130 Aircraft, General Purpose, Dispenser.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-45743	-	Soldering, Manual Type, High Reliability, Electrical and Electronic Equipment
MIL-S-46844	-	Solder Bath Soldering of Printed Wiring Assemblies
MIL-A-48078	-	Ammunition, Standard Quality Assurance Provisions, General Specification For

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn: AMSMC-QA, Dover, New Jersey 07801-5001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1095

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-1169	-	Packaging, Packing and Marking for Shipment for Inert Ammunition Components

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.5)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER (ARDC)

9272533	-	Dispenser Control Panel Assembly
9311430	-	Dispenser, General Purpose, Aircraft: M130
9311431	-	Electronics Module Assembly
9311434	-	Dispenser Assembly
9311481	-	Gasket, Mounting Plate
9321254	-	Packing and Marking For Box, Exterior For Payload Module Assembly
9322166	-	Packing and Marking For Box, Exterior For Retaining Plate Assembly
9322182	-	Packing and Marking For Box, Exterior For Safety Flag Assembly
9324636	-	Packing and Marking For Box, Exterior For Module Assembly, Programmer, Chaff
9324644	-	Packing and Marking For Box, Exterior For Cable Assembly
9324648	-	Packing and Marking For Box, Exterior For Printed Wiring Board Assembly, Power Supply #1
9324649	-	Packing and Marking For Box, Exterior For Printed Wiring Board Assembly, Power Supply #2
9324650	-	Packing and Marking For Box, Exterior For Printed Wiring Board Assembly, Flare Detector
9324654	-	Packing and Marking For Box, Exterior For Printed Wiring Board Assembly, Interconnect

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

9324657	-	Packing and Marking For Box, Exteriaor For Breech Assembly
9324664	-	Packing and Marking For Bag, Polyethylene, For Ground Spring
9324666	-	Packing and Marking For Box, Exterior For Printed Wiring Board Assembly, Sequences Switch
9324670	-	Packing and Marking For Sequencer Plate Assembly
9324671	-	Packing and Marking For Box, Exterior For Sensor Assembly, Flare
9324810	-	Packing and Marking For Box, Exterior For Edge Lighting Panel
9324813	-	Packing and Marking For Bag, Polyethylene For Standoff
9324815	-	Packing and Marking For Box, Exterior For Counter Buffer, Circuit Assembly
9326076	-	Packing and Marking For Box, Exterior Cover Assembly
9326150	-	Packing and Marking For Box, Exterior For Magnetic Counter, Two Drum
9327775	-	Packing and Marking For Bag, Polyethylene For Knob Assembly, Sequencer
9331674	-	Packing and Marking For Bag, Barrier For Gasket, Mounting Plate
11829051	-	Packing and Marking For Bag, Polyethylene For Knob

INSPECTION EQUIPMENT DRAWINGS

9280390	-	Test Set-up For Functional Testing (Repair Parts For Dispenser M130)

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with applicable drawings and specifications.

3.2 Parts and assemblies. The parts and assemblies shall comply with all requirements specified on the applicable drawings and with all requirements specified on applicable specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
9311461 Printed Wiring Board Assy	Continuity Isolation Resistance	TABLE I TABLE II	No Power Applied No Power Applied	- -	1 OHM or less Greater than 1 MEGOHM
9311452 Power Supply #1	Continuity	TABLE III J1-H and J	No Power Applied Ground for all Tests	-	1 OHM or less
	Noise Suppression	J1-F	+40.0 ± 2.0 VDC	P1-15	+32.0 ± 3.0 VDC
	+10.0 VDC Output	J1-F	+28.0 + 1.0 - 0.5 VDC	P1-9 P1-13	+27.6 ± 0.5 VDC +10.0 ± 0.5 VDC
	Ripple fire	J1-F and G	+28.0 ± 1.0 VDC	P1-8	0.0 ± 0.5 VDC
	RC Circuits	P1-1 P1-2 P1-3 P1-4 P1-5 P1-6	± 10.0 ± 0.5 VDC Momentarily +10.0 ±0.5 VDC Momentarily	J1-Z J1-M J1-a J1-$\overline{N}$ J1-P J1-R	Waveform per Fig 1 Waveform per Fig 1
9311455 Power Supply #2		P1-7 and 10 P1-9 and 16 P1-12 and 13	Ground for all Test +28.0 ± 1.0 VDC for all test +10.0 ± 0.5 VDC for all tests		
	Reset Pulse	P1-8	+10.0 ± 0.5 VDC thru 10K Resistor	P1-11	Waveform per Fig 2
	Master Clock	P1-8	+10.0 ± 0.5 VDC thru 10K Resistor	P1-14	Waveform per Fig 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
	Ripple Fire	P1-8	To ground	P1-24 10K res. to ground	Waveform per Fig 4
	Flare Dispense	P1-8	+10.0 ± 0.5 VDC thru 10K Resistor	P1-24 10K Res. to ground	Waveform per Fig 5
		P1-21	+28.0 ± 1.0 VDC for 50.0 ± 1 Mili Sec.		
	Chaff Dispense	P1-8	+10.0 ± 0.5 VDC thru 10K Resistor	P1-18 10K Res. To ground	Waveform per Fig 5
		P1-19	To ground thru 4.7K Res. For 50.0 ± 1 Mili Sec.		
	Aux Chaff	P1-8	+10.0 ± 0.5 VDC thru 10K Resistor	P1-22 10K Res. To ground	Waveform per Fig 5
		P1-17	To ground thru 4.7K Res. For 50.0 ± 1 Mili Sec.		
	Flare Single	P1-8	+10.0 ± 0.5 VDC thru 10K Resistor	P1-4	Waveform per Fig 6
		P1-6	+28.0 ± 1.0 VDC for 50.0 ± 1 Mili Sec.		
	Dud Indication	P1-8	+10.0 ± 0.5 VDC thru 10K Resistor	P1-4	Waveform per Fig 6
		P1-6 and 23	Shorted together		
		P1-15	28.0 ± 1.0 VDC for 50.0 ± 1 Mili Sec.		
	IRWR	P1-8	+10.0 ± 0.5 VDC thru 10K Resistor		
		P1-5	+28.0 ± 1.0 VDC for 50 ± 1 Mili Sec.	P1-3	Waveform per Fig 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
9311458 Flare Detector		P1-7 and 10 P1-14	Ground for all tests 20H2 symetrical square Wave pulse train from 0 VDC to 10.0 ± 0.5 VDC and return.		
	Single Input	P1-12 and 13 P1-11 P1-9 P1-22	+ 10.0 ± 0.5 VDC To ground +10.0 ± 0.5 VDC thru A 10K Res. To ground momentarily	P1-21	Waveform per Fig 7
	IRWR Input	P1-12 and 13 P1-11 P1-22 P1-9 P1-9	+10.0 ± 0.5 VDC To ground +10.0 ± 0.5 VDC thru 10K Res. +10.0 ± 0.5 VDC thru A 10K Res. To ground momentarily.	P1-21	Waveform per Fig 7
	Reset	P1-11,12 and 13 P1-9 P1-22 P1-22 Same as above Except P1-9	+10.0 ± 0.5 VDC +10 ± 0.5 VDC thru 10K Res +10.0 ± 0.5 VDC thru 10K Res. To ground momentarily. To ground momentarily.	P1-21 P1-21	No Waveform No Waveform

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
	Sensor Input	P1-11	To ground		
		P1-12 and 13	+10.0 ± 0.5 VDC		
		P1-9	+10.0 ± 0.5 VDC thru 10K Res		
		P1-22	+10.0 ± 0.5 VDC thru 10K Res		
		P1-22	To ground momentarily		
		P1-20	10.0 ± 0.5 VDC, 10 Mili Sec		
			After P1-22 to ground	P1-21	Waveform per Fig 8
		Same as above Except P1-9	To ground momentarily	P1-21	Waveform per Fig 8
	Dud Indication	P1-11	To ground		
		P1-12 and 13	+10.0 ± 0.5 VDC		
		P1-9	+10.0 ± 0.5 VDC thru 10K Res		
		P1-22	+10.0 ± 0.5 VDC thru 10K Res		
		P1-22	To ground momentarily	P1-15	Waveform per Fig 9
9311473 Chaff Program Module		P2-7 of 9311524 and 9311521	+10.0 ± 0.5 VDC for all tests		
		P2-8 of 9311524 and 9311521	20 Hz symetrical square wavepulse amplitude from OVDC to +10 VDC and return for all tests		
		P2-9 of 9311521 and 9311524	+28.0 ± 0.5 VDC thru 1K Resistor for all tests		

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
		P2-3 and 5 of 9311521 and 9311524	To ground for all tests		
		S1 thru S4 on unit under test	Fully counter clockwise		
	Burst count	P2-1 of 9311524	28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	One Pulse per Fig 10
		S1 on Unit under test	To position 2		
		P2-1 of 9311524	28.0 ± 0.5 VDC Momentarily	P2-9 of 9311521	Two pulses per Fig 10 with 100 ± 20 m Sec between leading edges
		S1 on unit Under test	To position 3		3 pulses per Fig 10 with 100 ± 20 m Sec
		P2-1 of 9311524	28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	between leading edges
		S1 on unit under test	To position 4	P2-9 of 9311521	4 pulse per Fig 5.1-1 with 100 ± 20 m Sec
		P2-1 of 9311524	28.0 ± 0.5 VDC momentarily.		between leading gages.
		S1 on unit under test	To position -5	P2-9 of 9311521	6 pulses per Fig 5.1-1 with 100 ± 20 m Sec
		P2-1 of 9311524	28.0 ± 0.5 VDC momentarily.		between leading edges.
		S1 on unit under test	To position 6	P2-9 of 9311521	8 Pulses per Fig 5.1-1 with 100 ± 20 m Sec
		P2-1 of 9311524	28.0 ± 0.5 VDC momentarily.		between leading edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
9311473	Burst interval	S1 on unit under test.	To position 2		
Chaff Program Module		S2 on unit under test	To position 2		
		P2-1 of 9311524	+28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	2 pulses per Fig. 10 with 200 ± 40 m Sec. between leading edges.
		S2 on unit under test	To position 3		
		P2-1 of 9311524	+28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	2 pulses per Fig. 10 with 300 ± 60 m Sec. between leading edges.
		S2 on unit under test	To .4 Sec.		
		P2-1 of 9311524	+28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	2 pulses per Fig. 10 with 400 ± 80 m Sec. between leading edges.
	Salvo Count	S1, S2, S4 on unit under test	Fully counter clockwise		
		S3 on unit under test	To position 2		
		P2-1 of 9311524	+28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	2 pulses per Fig. 10 with 1.0 ± .2 Sec. between leading edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
		S3 on unit under test P2-1 of 9311524	To position 3 +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	4 pulses per Fig. 10 with 1.0 ± .25 Sec. between leading edges.
		S3 on unit under test P2-1 of 9311524	To position 4 +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	8 pulses per Fig. 10 with 1.0 ± .2 Sec. between leading edges.
		S3 on unit under test P2-1 of 9311524	To position 5 +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	Continuous train of pulses per Fig. 10 with 1.0 ± .2 Sec. between leading edges.
	Salvo internal	S3 on unit under test	To position 2		
		S4 on unit under test P2-1 of 9311524	To position 2 +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	2 pulses per Fig. 10 with 2.0 ± .4 Sec. between leading edges.
		S4 on unit under test P2-1 of 9311524	To position 3 +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	2 pulses per Fig. 10 with 3.0 ± .6 Sec. between leading edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-29T02:28Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
		S4 on unit under test P2-1 of 9311524	To position 4 +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	2 pulses per Fig. 10 with 4.0 ± .8 Sec. between leading edges.
		S4 on unit under test P2-1 of 9311524	To position 5 +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	2 pulses per Fig. 10 with 5.0 ± 1.0 Sec. between leading edges.
		S4 on unit under test P2-1 of 9311524	To position 6 +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	2 pulses per Fig. 10 with 8.0 ± 1.6 Sec. between leading edges.
		S4 on unit under test S3 on unit under test P2-1 of 9311524	To position 7 fully clockwise +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	Continuous train of pulses per Fig. 10 having a random time interval between leading edges.
	Single	S1,2,3 and 4 on under test P2-1 of 9311521	Fully counter clockwise +28.0 ± 0.5 VDC momentarily	P2-9 of 9311521	1 pulse per Fig. 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
	Manual	S1,2,3 and 4 on unit under test	Fully counter clockwise		
		P2-2 of 9311521	+28.0 ± 0.5 VDC momentarily	P2-9 of 931152	1 pulse per Fig. 10
	Double -	S1,2,3 and 4 on unit under test	Fully counter clockwise		
		P2-1 of 9311521	+28.0 ± 0.5 VDC momentarily	P2-9 of 931152	1 pulse per Fig. 10
		P2-2 of 9311524	+28.0 ± 0.5 VDC momentarily	P2-9 of 931152	1 pulse per Fig. 10
9311611 CABLE ASSEMBLY	Continuity	Table IV	No power applied	-	1 (one) ohm or less
	Insulation Resistance	Table V	500 ± 10 VDC	-	100 megohms minimum
9311494 Flare Sensor Assembly	Sensor output	Pin A on connector of unit under test. Pin B through 330 ohm res. to ground.	+13.0 ± 0.5 VDC		
		Flash unit in front of sensor assembly 6 ± 1 inch away	Apply flash	Pin B of unit under test	Wave form per Fig. 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
	Sensor Isolation	Pin A of flare sensor connector and flare sensor metal housing.	No power applied	-	Resistance greater than 1 megohm.
		Pin B of flare sensor connector and flare sensor metal housing.	No power applied	-	Resistance greator than 1 megohm.
9311464 Sequencer Switch Assembly	SEE NOTE	P1-10 and 20 P1-6,7,8 and 14	Ground for all tests +28.0 ± 1.0 VDC for all tests.		
	Sensor Power	P1-11	+28.0 ± 1.0 VDC	P1-2	+13.0 ± 0.85 VDC
	Squib output Sequence	P1-17	30 Pulses per Fig. 12	J1- TOB	Observe LED's light in sequence one at a time.
	Dispense Cascade	P1-17	On 31st pulse	P1-9	Wave form per Fig. 13
	Squib output Pulse	P1-17	30 Pulses per Fig. 12	J1-d 1st pulse	Wave form per Fig. 14
				J1-R 12th pulse	Wave form per Fig. 14
				J1-S 24th pulse	Wave form per Fig. 14
				J1-B 30th pulse	Wave form per Fig. 14

NOTE: To reset sequencer apply 28.0 ± 0.5 VDC to pin P1-16 momentarily(not greater than 1 second).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
9311488 Plate Assembly Sequencer	Continuity	Per Table VI	No power applied	-	1 Ohm or less
	Continuity	J1-8 to J2-14	No power applied	-	.50 ± 0.02 ohms
		J1-19 to J2-6	No power applied	-	2.00 ± 0.02 ohms
	Filter Isolation	Per table VII	No power applied	-	Greater than 5K ohms
9311488 Plate Assembly Sequencer		P1-8	+28.0 ± 4.0 VDC for all tests.		
		P1-9	Ground for all tests.		
	CB1 Test	CB1 to reset position		J2-7	0.0 ± 0.2 VDC
		J2-16	To ground thru 10 ohm, 10 watt resistor	J2-7	28.0 ± 4.0 VDC (CB1 small trip within 1 second)
	Solenoid Driver test	J2-4	28.0 ± 4.0 VDC	J2-1	28.0 ± 4.0 VDC
		J2-13	28.0 ± 4.0 VDC	J2-1	0.0 ± 0.2 VDC
	Squib output Test	J2-6	28.0 ± 4.0 VDC	J2-18	+28.0 ± 4.0 VDC
		J2-5	28.0 ± 4.0 VDC	J2-18	0.0 ± 0.2 VDC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

PART	TEST	INPUTS	INPUT REQUIREMENTS	OUTPUTS	OUTPUT REQUIREMENTS
9272532 Panel Edge Lighting	Functional	P2 (Center terminal) (Outer term Ground)	+28 ± .1 VDC	Observe: Lamps light All lettering on front side Chaff Flare windows	Light w/red glow Light w/red glow Light w/red glow
9313670 Counter Buffer Circuit Assembly	Chaff counter test Flare counter	E1 E2 E4 E1 E6 E5	28 ± 1.0 VDC 28 ± 1.0 VDC thru 150 ohm resistor Pulse per Fig. 16 28 ± 1.0 VDC 28 ± 1.0 VDC thru 150 ohm resistor Pulse per Fig. 16	Scope across 150 ohm res. Scope across 150 ohm res.	Wave form per Fig. 15 Wave form per Fig. 15
9311437 Breech Assembly	Continuity Insulation Resistance	Table VIII Table IX	No power applied 500 ± 10 VDC	- -	1 (one) ohm or less 100 megohms minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

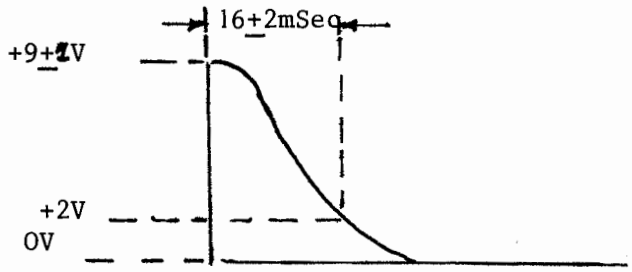


FIGURE 1 - WAVEFORM

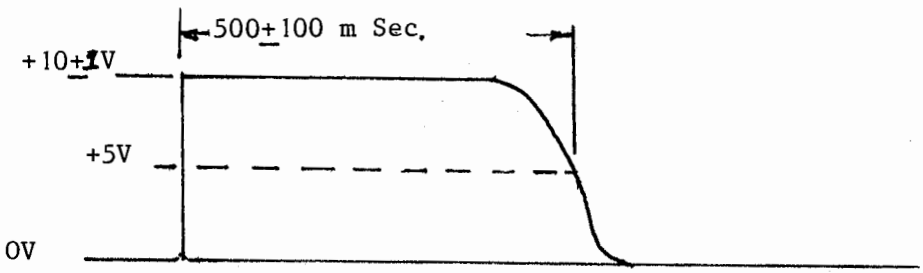


FIGURE 2 - WAVEFORM

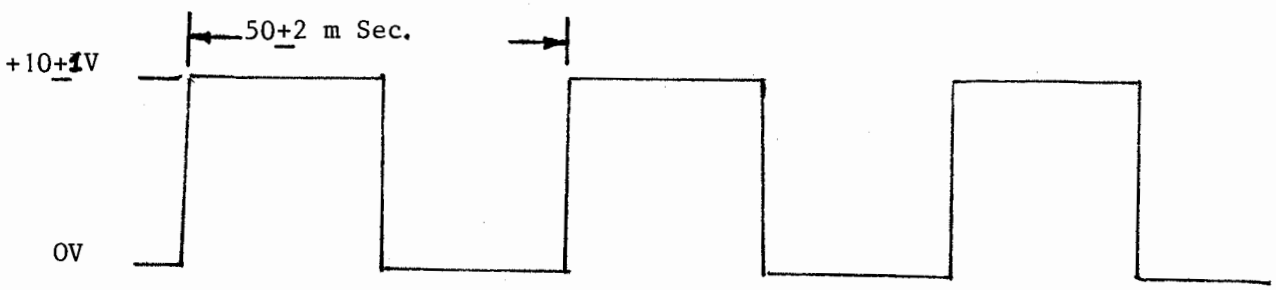


FIGURE 3 - WAVEFORM

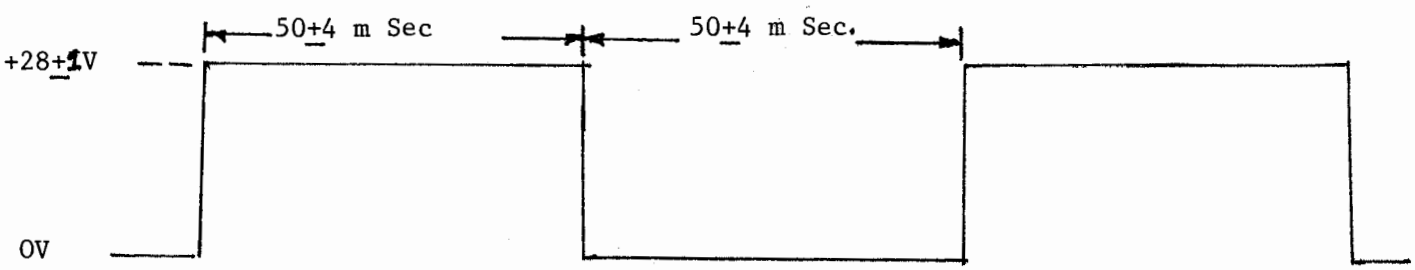


FIGURE 4 - WAVEFORM

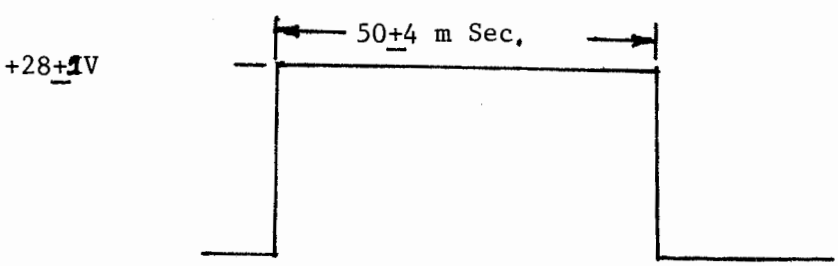


FIGURE 5 - WAVEFORM

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

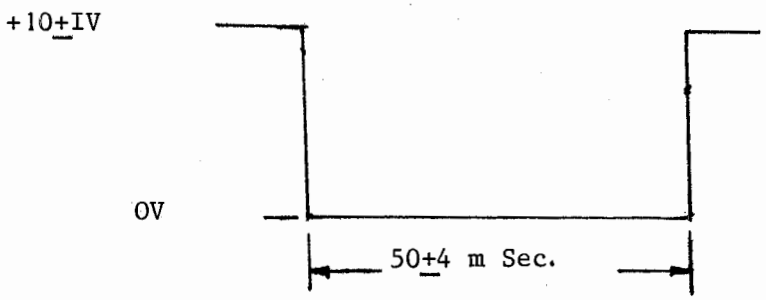


FIGURE 6 - WAVEFORM

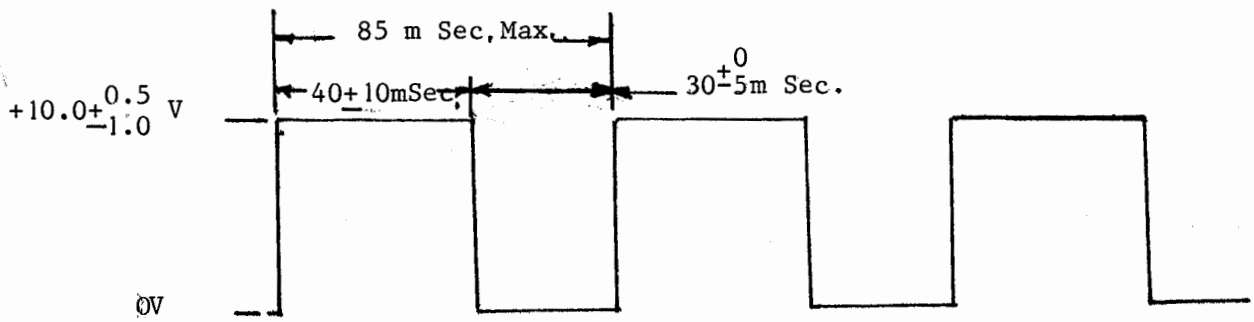


FIGURE 7 - WAVEFORM

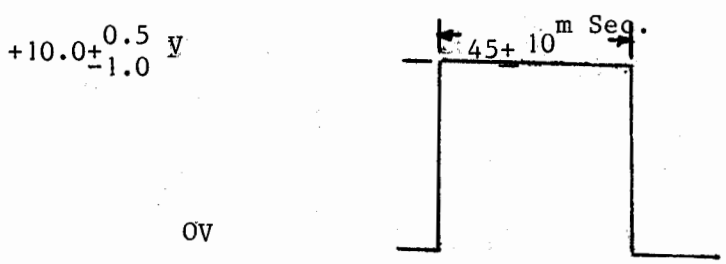


FIGURE 8 - WAVEFORM

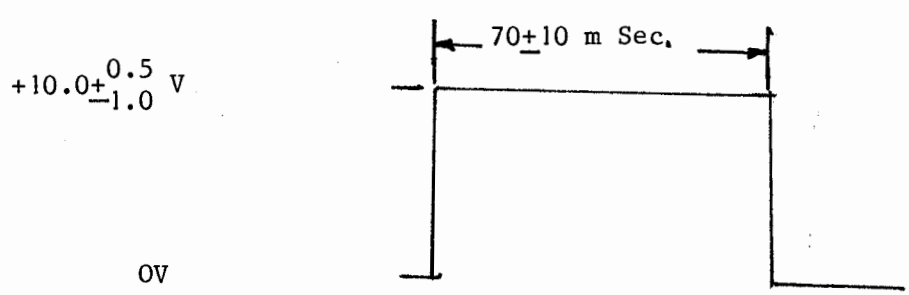


FIGURE 9 - WAVEFORM

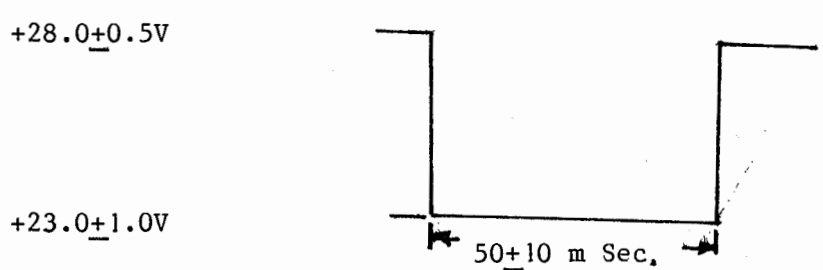


FIGURE 10 - WAVEFORM

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T02:23Z
Check the source to verify that this is the current version before use.

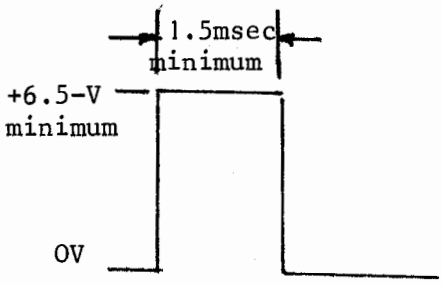


FIGURE 11 - WAVEFORM

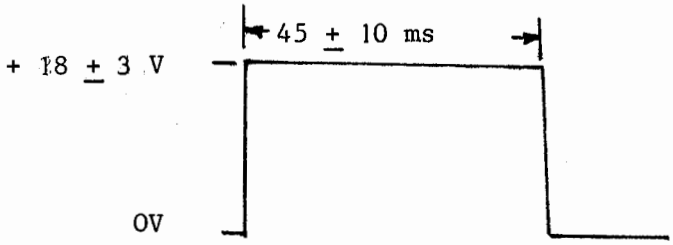


FIGURE 12 - WAVEFORM

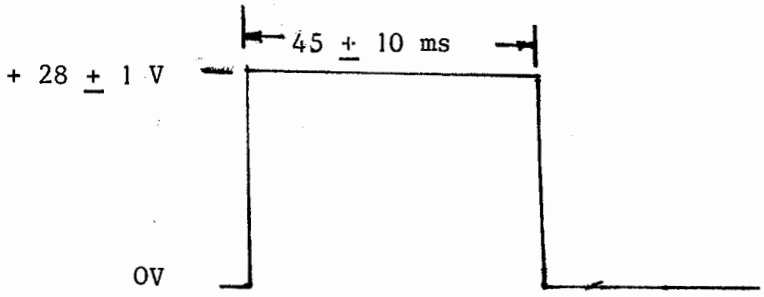


FIGURE 13 - WAVEFORM

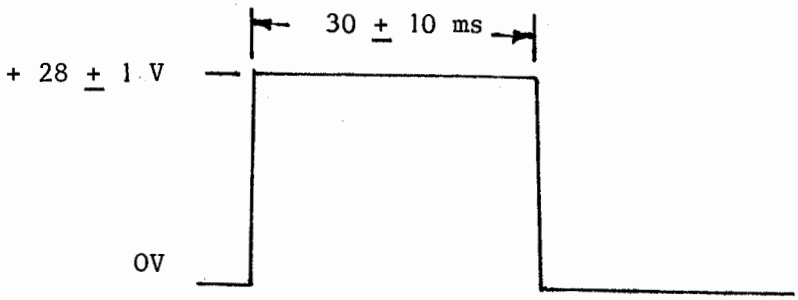


FIGURE 14 - WAVEFORM

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

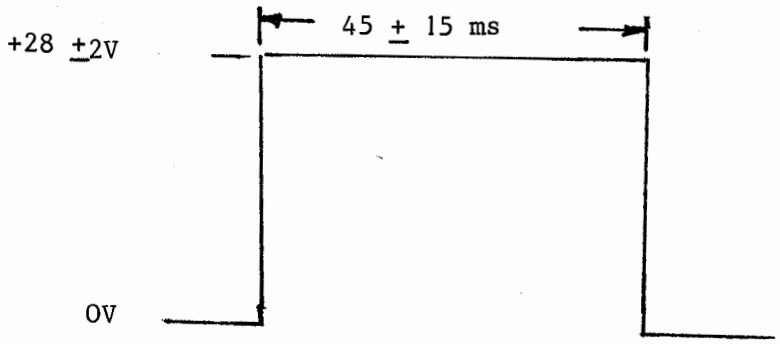


FIGURE 15 - WAVEFORM

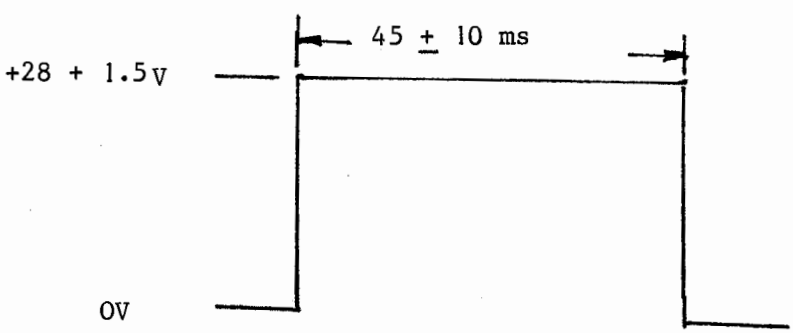


FIGURE 16 - WAVEFORM

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONTINUITY

FROM	TO	FROM	TO	FROM	TO
J1-1	J2-1	J1-10	J2-10	J1-22	J2-22
J2-1	J3-1	J2-10	J3-10	J1-23	J2-23
J3-1	J5-1	J3-10	J4-5	J1-24	J2-24
J1-2	J2-2	J4-5	J5-5	J2-3	J3-9
J2-2	J3-2	J1-8	J2-8	J2-4	J3-22
J3-2	J5-2	J1-9	J2-9	J2-11	J3-11
J1-3	J3-3	J1-12	J2-12	J3-11	J4-6
J3-3	J4-1	J1-12	J1-13	J4-6	J5-6
J1-4	J3-4	J2-12	J2-13	J2-14	J3-14
J3-4	J4-2	J2-12	J3-12	J3-14	J4-8
J1-5	J2-5	J3-12	J3-13	J4-8	J5-8
J1-6	J2-6	J3-12	J4-7	J2-15	J3-15
J1-7	J2-7	J4-7	J5-7	J2-17	J3-17
J2-7	J3-7	J1-16	J2-16	J3-17	J4-9
J3-7	J4-3	J1-18	J2-18	J2-19	J3-19
J4-3	J5-3	J1-20	J2-20	J3-19	J5-9
J5-3	J5-5	J2-20	J3-20	J2-21	J3-21

TABLE II- ISOLATION RESISTANCE

FROM	TO	FROM	TO	FROM	TO
J1-1	J1-2	J2-21	J2-20	J3-9	J3-10
J1-2	J1-3	J2-20	J2-19	J3-10	J3-11
J1-3	J1-4	J2-19	J2-18	J3-11	J3-12
J1-4	J1-5	J2-18	J2-17	J3-12	J3-14
J1-5	J1-6	J2-17	J2-16	J3-14	J3-15
J1-6	J1-7	J2-16	J2-15	J3-15	J3-17
J1-7	J1-8	J2-15	J2-14	J3-17	J3-19
J1-8	J1-9	J2-14	J2-12	J3-19	J3-20
J1-9	J1-10	J2-12	J2-11	J3-20	J3-21
J1-10	J1-12	J2-11	J2-10	J3-21	J3-22
J1-12	J1-16	J2-10	J2-5	J4-2	J4-3
J1-16	J1-18	J2-5	J2-4	J4-3	J4-6
J1-18	J1-20	J2-4	J2-3	J4-6	J4-7
J1-20	J1-22	J2-3	J2-2	J4-7	J4-8
J1-22	J1-23	J2-1	J2-4	J4-8	J4-9
J1-23	J1-24	J3-4	J3-7	J5-2	J5-3
J2-22	J2-21	J3-7	J3-9	J5-8	J5-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

TABLE III - CONTINUITY

FROM	TO
J1-A	P1-16
J1-B	P1-18
J1-C	P1-20
J1-D	P1-22
J1-E	P1-24
J1-H	J1-J
J1-H	P1-7
J1-H	P1-10
J1-V	P1-23
P1-12	P1-13
J1-Y	P1-3
J1-L	P1-4
J1-K	P1-5
J1-W	J1-F

TABLE IV - CONTINUITY

FROM	TO
P3-A	P1-1
P3-A	P2-B
P3-A	P3-T
P3-B	P2-a
P3-C	P1-6
P3-D	P1-11
P3-D	P2-C
P3-E	P2-M
P3-F	S1-1
P3-F	P1-8
P3-F	J1-A
P3-F	P2-A
P3-F	P2-W
P3-H	P1-2
P3-J	P2-P
P3-L	P2-Y
P3-M	P2-R
P3-N	P3-K
P3-N	P2-J
P3-P	S1-2
P3-R	P1-9
P3-R	S1-3
P3-R	J1-B
P3-R	P2-H
P3-S	P2-G
P3-U	P1-5
P3-U	P2-E
P3-P	P3-F-S1 NOTE DEPRESSED
P3-F	P3-R-S1 DEPRESSED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

TABLE V - INSULATION RESISTANCE

FROM	TO
P3-A	TO ALL OTHER PINS IN P3 EXCEPT PIN T
P3-B	TO ALL OTHER PINS IN P3
P3-C	TO ALL OTHER PINS IN P3
P3-D	TO ALL OTHER PINS IN P3
P3-E	TO ALL OTHER PINS IN P3
P3-F	TO ALL OTHER PINS IN P3 EXCEPT PIN P
P3-H	TO ALL OTHER PINS IN P3
P3-J	TO ALL OTHER PINS IN P3
P3-K	TO ALL OTHER PINS IN P3 EXCEPT PIN N
P3-L	TO ALL OTHER PINS IN P3
P3-M	TO ALL OTHER PINS IN P3
P3-R	TO ALL OTHER PINS IN P3
P3-S	TO ALL OTHER PINS IN P3
P3-U	TO ALL OTHER PINS IN P3

TABLE VI - CONTINUITY

SWITCH	FROM	TO
S1 TO C	J1-1	J2-17
S1 TO C	J1-2	J2-9
S1 TO C	J1-5	J1-6
S1 TO F	J1-1	J1-2
S1 TO F	J1-6	J2-9
S1 TO F	J1-5	J2-17
S1 TO F	J2-8	J2-11
S1 TO F	J1-12	J2-16
S1 TO F	J1-11	J2-2
S1 TO F	J1-9	J2-20
S1 TO F	J2-20	SEQ. PLATE (9311486)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

TABLE VII - FILTER ISOLATION

FROM	TO
J1-1	SEQ. PLATE P/N 9311486
J1-5	SEQ. PLATE P/N 9311486
J1-8	SEQ. PLATE P/N 9311486
J1-11	SEQ. PLATE P/N 9311486

TABLE VIII - CONTINUITY

FROM	TO	FROM	TO	FROM	TO
P1-A	E-29	P1-M	E-9	P1-Z	E-17
P1-B	E-30	P1-N	E-10	P1-a	E-23
P1-C	E-18	P1-P	E-11	P1-b	W-32
P1-D	E-19	P1-R	E-12	P1-c	E-31
P1-E	E-20	P1-S	E-24	P1-d	E-1
P1-F	E-21	P1-T	E-25	P1-e	E-3
P1-G	E-22	P1-U	E-26	P1-f	E-4
P1-H	E-31	P1-V	E-27	P1-g	E-5
P1-J	W-33	P1-W	E-28	P1-h	E-6
P1-K	E-7	P1-X	E-15	P1-i	E-13
P1-L	E-8	P1-Y	E-16	P1-j	E-14
				P1-p	E-2

TABLE IX - INSULATION RESISTANCE

FROM	TO	FROM	TO
P1-A	ALL OTHER PINS IN P1	P1-U	ALL OTHER PINS IN P1
P1-B		P1-V	
P1-C		P1-W	
P1-D		P1-X	
P1-E		P1-Y	
P1-F		P1-Z	
P1-G		P1-a	
P1-J		P1-b	
P1-K		P1-d	
P1-L		P1-e	
P1-M		P1-f	
P1-N		P1-g	
P1-P		P1-h	
P1-R		P1-i	
P1-S		P1-j	
P1-T	ALL OTHER PINS IN P1	P1-p	ALL OTHER PINS IN P1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

3.3 Wiring and soldering. Soldering of electrical wires, cables, connectors, components and assemblies shall be performed in a thorough, workmanlike manner in accordance with MIL-S-45743 or MIL-S-46844.

3.4 Functional testing. See Detail Requirements Listed and Electronic Testing of Spare Parts Para. 4.5.1.

3.5 Workmanship. All parts shall be fabricated and finished in a thorough, workmanlike manner. They shall be free of burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, corrosion products, and other foreign matter. The cleaning method used shall not be injurious to any parts, nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following type of inspection shall be conducted on this item:

a. Quality Conformance Inspection

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of quantities as indicated in item specification.

4.3.2 Inspections to be performed. See MIL-A-48078, item specification and as specified herein.

4.3.3 Rejection. See MIL-A-48078.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

4.4.2 Examination. See MIL-A-48078.

a. Unless otherwise specified in the classification of defects and test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Printed Wiring Board Assembly, Interconnect	1 OF 1	9311461
			NEXT HIGHER ASSEMBLY: 9311429

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None				
Major					
101	Any component missing damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering improper or inadequate		0.40%	3.3	Visual
103	Insulating compound missing or improper		0.40%	3.2	Visual
104	Pins not trimmed in accordance with drawing		0.40%	3.2	Visual
105	Marking missing, illegible, or incorrectly annotated		0.40%	3.2	Visual
106	Functional test		100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET		DRAWING NUMBER
4.4.2.2	Printed Wiring Board Assembly, Power Supply #1		1 OF 1		9311452
					NEXT HIGHER ASSEMBLY 9311429
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering improper or inadequate		0.40%	3.3	Visual
103	Insulating compound missing or improper		0.40%	3.2	Visual
104	Sealing compound missing from threaded surface		0.40%	3.2	Visual
105	Marking missing, illegible, or incorrectly annotated		0.40%	3.2	Visual
106	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9311455
4.4.2.3	Printed Wiring Board Assembly, Power Supply #2				NEXT HIGHER ASSEMBLY 9311429
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering improper or inadequate		0.40%	3.3	Visual
103	Insulating compound missing or improper		0.40%	3.2	Visual
104	Polarizing plug missing or improperly located		0.40%	3.2	Visual
105	Marking missing, illegible, or incorrectly annotated		0.40%	3.5	Visual
106	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9311458
4.4.2.4	Printed Wiring Board Assembly, Flare Detector				NEXT HIGHER ASSEMBLY 9311429
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering improper or inadequate		0.40%	3.3	Visual
103	Insulating compound missing or improper		0.40%	3.2	Visual
104	Polarizing plug missing or improperly located		0.40%	3.2	Visual
105	Marking missing, illegible, or incorrectly annotated		0.40%	3.2	Visual
106	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.5	Module Assembly, Programmer, Chaff		9311473
			NEXT HIGHER ASSEMBLY 9311443

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component loose, damaged, missing or improperly assembled		0.40%	3.2	Visual
102	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6	Payload Module Assembly	1 OF 1	9311451
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	(Dwg. 9311479 or 9335632)				
101	Squareness dimensions of payload holes (30)		0.40%	3.2	Gage
102	Position of payload holes (30)		0.40%	3.2	Gage
103	Wall thicknesses		0.40%	3.2	Gage
104	Overall length, width, height (Dwg. 9311446)		0.40%	3.2	Gage
105	Position of dowel pin holes		0.40%	3.2	Gage
106	Position of slots		0.40%	3.2	Gage
107	Overall length, width and thickness		0.40%	3.2	Gage
108	Any component loose, missing, or improperly mounted (All items)		0.40%	3.2	Visual
109	Functional test	0, 1	100%	3.4	4.5.1
Minor	(Dwg. 9311479 or 9335632)				
201	Markings missing or illegible (Dwg. 9311479, 9335632, 9311446)		0.65%	3.2	Visual
202	Protective finish missing or inadequate		0.65%	3.2	Visual
203	Evidence of poor workmanship (All items)		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.7	Cable Assembly	1 OF 1	9311611
			NEXT HIGHER ASSEMBLY 9311431

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Incorrect lengths of P1, P2, P3, J1 and S1 Branches		0.40%	3.2	Gage
102	Any component damaged or improperly installed		0.40%	3.2	Visual
103	Insulating tape missing or inadequate		0.40%	3.2	Visual
104	Sleeving at J1 missing or inadequate		0.40%	3.2	Visual
105	Continuity and insulation test	0, 1	100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil-371 Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.8	Sensor Assembly, Flare		9311494
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	(Dwg. 9311493)				
101	Total length housing (Dwg. 9311494)		0.40%	3.2	Gage
102	Potting and endcap missing or improper		0.40%	3.2	Visual
103	Sleeving insulation missing or improper		0.40%	3.2	Visual
104	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE			SHEET 1 OF 1	DRAWING NUMBER 9311464
4.4.2.9	Printed Wiring Board Assembly, Sequencer Switch				NEXT HIGHER ASSEMBLY 9311443
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Conformal coating missing or improper		0.40%	3.2	Visual
102	Insulating compound missing or improper		0.40%	3.2	Visual
103	Soldering improper		0.40%	3.3	Visual
104	Orientation of connector receptacle polarizing keyway, improper		0.40%	3.2	Visual
105	Any component loose, damaged, missing or improperly mounted		0.40%	3.2	Visual
106	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.10	Panel, Edge Lighting	1 OF 1	9272532
			NEXT HIGHER ASSEMBLY 9272533

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Overall length, width or thickness		0.40%	3.2	Gage
102	Hole sizes		0.40%	3.2	Gage
103	Hole locations		0.40%	3.2	Gage
104	Marking missing or illegible		0.40%	3.2	Visual
105	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.11	Plate Assembly, Sequencer				9311488
					NEXT HIGHER ASSEMBLY
					9311443
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering improper or inadequate		0.40%	3.2	Visual
103	Adhesive potting missing or inadequate		0.40%	3.2	Visual
104	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9313670
4.4.2.12	Counter Buffer Circuit Assembly				NEXT HIGHER ASSEMBLY 9321318
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component incorrect, missing, damaged or incorrectly assembled		0.40%	3.2	Visual/Manual
102	Soldering improper		0.40%	3.3	Visual
103	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Conformal coating missing or incorrect		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.0%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.13	Breech Assembly	1 OF 1	9311437
			NEXT HIGHER ASSEMBLY: 9311434

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Components loose, damaged, missing or improperly mounted		0.40%	3.2	Visual
102	Soldering improper		0.40%	3.3	Visual
103	Sleeving insulation missing or improper		0.40%	3.2	Visual
104	Functional test	0, 1	100%	3.4	4.5.1
Minor					
201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9311516
4.4.2.14	Spring				NEXT HIGHER ASSEMBLY 9311437
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Thickness, min.		0.40%	3.2	Gage
102	Height of tabs above mounting surface		0.40%	3.2	Gage
103	Location and diameter of hole		0.40%	3.2	Gage
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Gage
202	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.15	Spring, Return				9311539
					NEXT HIGHER ASSEMBLY 9311443
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Location and dimensions of hole		0.40%	3.2	Gage
Minor 201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.16	Plate Assembly, Retaining				See below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
	(Dwg. 9311478)				
101	Any component loose, missing, or improperly mounted		0.40%	3.2	Visual
	(Dwg. 9311466)				
102	Position of dowel pin holes		0.40%	3.2	Gage
103	Position of mounting screw holes		0.40%	3.2	Gage
104	Position of slots		0.40%	3.2	Gage
105	Overall length and height		0.40%	3.2	Gage
Minor					
	(Dwg. 9311446)				
201	Protective finish missing or inadequate		0.65%	3.2	Visual
	(Dwg. 9311478 and 9311446)				
202	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9310970
4.4.2.17	Knob				NEXT HIGHER ASSEMBLY 9272533
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Shaft hole diameter		0.40%	3.2	Gage
Minor					
201	Knob height		0.65%	3.2	Gage
202	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
4.4.2.18	Cover Assembly (Dwg. 9321326)				See below
CATEGORY	**EXAMINATION OR TEST**	**NO. OF SAMPLE UNITS**	**AQL OR 100%**	**REQUIREMENT PARAGRAPH**	**PARAGRAPH REFERENCE /INSPECTION METHOD**
Critical	None defined				
Major	None defined				
Minor					
	(Dwg. 9321323)				
201	Overall height, width, depth		0.65%	3.2	
202	Protective finish missing or inadequate		0.65%	3.2	
203	Evidence of poor workmanship		1.00%	3.5	

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.19	Post, Mounting	1	1	9321322
				NEXT HIGHER ASSEMBLY 9321318

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Hole threads (2)		0.40%	3.2	Gage
102	Hole depth (2), min.		0.40%	3.2	Gage
103	Length		0.40%	3.2	Gage
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.20	Flag Assembly, Safety				9311511
					NEXT HIGHER ASSEMBLY 9311430
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Lettering missing, illegible or incorrect		0.40%	3.2	Visual
Minor 201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.21	Fastener				9321327
					NEXT HIGHER ASSEMBLY 9310969
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Smallest diameter; incorrect		0.40%	3.2	Gage
102	Slot depth		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22	Stand-off, Hexagonal				9313883
					NEXT HIGHER ASSEMBLY 9311443
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Incorrect thread		0.40%	3.2	Gage
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Incorrect height		0.65%	3.2	Gage
203	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil/ Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
4.4.2.23	Knob Assembly, Sequencer		1 OF 1	See below
				NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
	(Dwg. 9311691)				
101	Any component loose, damaged, missing, or improperly assembled		0.40%	3.2	Visual
	(Dwg. 9311412)				
102	Dimensions of center hole		0.40%	3.2	Gage
103	Hole threads (2)		0.40%	3.2	Gage
Minor					
	(Dwg. 9311412)				
201	Protective finish missing or inadequate		0.65%	3.2	Visual
	(Dwg. 9311691)				
202	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.24	Stud Assembly	1	1	9321328
				NEXT HIGHER ASSEMBLY: 9321326

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.25	Washer, Retaining	1 OF 1	9321330
			NEXT HIGHER ASSEMBLY: 9321326

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside diameter		0.40%	3.2	Gage
102	Allowable bow, max.		0.40%	3.2	Gage
Minor					
201	Protective finish missing or inadequate		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.26	Counter, Two Drum	1	1	9310953
				NEXT HIGHER ASSEMBLY: 9321318

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Incorrect thread		0.40%	3.2	Gage
Minor					
201	Marking missing, illegible, or incorrectly annotated		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63199A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.27	Gasket, Mounting Plate				9311481
					NEXT HIGHER ASSEMBLY 9311464
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Hole location, true position (4 holes)		0.40%	3.2	Gage
102	Overall length		0.40%	3.2	Gage
103	Overall width		0.40%	3.2	Gage
104	Inside length		0.40%	3.2	Gage
105	Inside width		0.40%	3.2	Gage
106	Thickness		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the Quality Conformance Inspection Tables.

4.4.3.1 Air leak test. Major defect - This test shall be performed 100% and as specified in 4.5.1 using equipment in accordance with 4.4.4. Any drum which fails the test shall be classified defective and removed from the lot.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the Paragraph Reference/Inspection Method column in the tables starting with Paragraph 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein.

4.5 Methods of inspection.

4.5.1 Electronic testing of repair parts. (See Test Procedure Dwg. 9280390).

4.5.2 Air leakage test. The drums shall be tested using the procedures on Dwg. 8806652.

5. PACKAGING

5.1 Packaging requirements. Packaging shall be as specified on the drawings below:

Nomenclature	Pkg Dwgs
Knob	11829051
Printed Wiring Board Assy, Interconnect	9324654
Printed Wiring Board Assy, Power Supply #1	9324648
Printer Wiring Board Assy Power Supply #2	9324649
Printed Wiring Board Assy, Flare Detector	9324650
Module Assembly, Programmer, Chaff	9324636
Payload Module Assembly	9321254
Flag Assembly, Safety	9322182
Cable Assembly	9324644
Breech Assembly	9324657
Sensor Assembly, Flare	9324671
Spring, Ground	9324664
Printed Wiring Board Assy, Sequencer Switch	9324666
Plate Assembly, Sequencer	9324670
Plate Assembly, Retainer	9322166

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.

Panel Edge Lighting	9324810
Counter Buffer, Circuit Assembly	9324815
Stand-off	9324813
Magnetic Counter, Two Drum	9326150
Cover Assembly	9326076
Gasket, Mounting Plate	9331674
Knob Assembly Sequencer	9327775

Where no packaging drawing is specified, parts shall be individually packaged in accordance with Level A of MIL-STD-1169.

5.2 Packing and marking. Packing and marking shall be as specified on the drawings listed in 5.1.

Where no packing and marking drawing is specified, packing and marking shall be in accordance with Level A of MIL-STD-1169.

6. NOTES

6.1 Intended use. The components covered by this specification are intendeed for use on the Dispenser, General Purpose, Aircraft: M130.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment for design approvals. See MIL-A-48078. Submit equipment designs as required, to Commander, U.S. Army Armament Research and Development Center, ATTN: AMSMC-QAT-I(D), Dover, New Jersey 07801.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading of US Army Armament Research and Development Center (ARDC) may also include drawings prepared by, and identified as, US Army Armament Research and Development Command (ARRADCOM), Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDC.

6.5 Changes from Previous Issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1095-A181)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:23Z
Check the source to verify that this is the current version before use.