MIL-P-60605B(MU)
30 September 1969
SUPERSEDING
MIL-P-60605A(MU)
3 May 1968

MILITARY SPECIFICATION

PROJECTILE, 60MM, H.E., M49A2 METAL PARTS ASSEMBLY
(CARBON STEEL)

1. SCOPE

1.1 This specification covers Projectile 60MM, H.E., M49A2 Metal Parts Assembly (Carbon Steel).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-A-2550 - Ammunition and Special Weapons, General Specification for

MIL-I-6868 - Inspection, Processes Magnetic Particle

STANDARDS

Federal

Federal Test Method Standard No. 141 - Paint, Varnish, Lacquer, and Related Materials; Methods of Inspection Sampling and Testing

Federal Test Method Standard No. 151 - Metals, Test Methods

FSC 1310

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:48Z
Check the source to verify that this is the current version before use.

2.1 (Cont'd)

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	- Quality Assurance Terms and Definitions
MIL-STD-410	- Qualification of Inspection Personnel (Magnetic Particle and Penetrant)
MIL-STD-1167	- Ammunition Data Card
MIL-STD-1169	- Packaging, Packing and Marking for Shipment of Inert Ammunition Components
MIL-STD-1235	- Single and Multilevel Continuous Sampling Procedure and Tables for Inspection by Attributes

DRAWINGS

Munitions Command

D10535905	- Projectile, 60MM, H.E., M49A2 Metal Parts Assembly (Carbon Steel)
IEL-10535905	- Inspection Equipment List for Projectile, 60MM, H.E., M49A2 Metal Parts Assembly (Carbon Steel)

PUBLICATIONS

PA-PD-792	- Equipment, Testing or Measuring for Ammunition Items

(Copies of specifications, standards, drawings and publications required by supplier in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASA-B46.1 - Surface Texture

(Application for copies should be addressed to the American National Standards Institute (ANSI) 1430 Broadway, New York, N.Y. 10018).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General - Materials, parts and assemblies shall comply with the requirements specified on the applicable drawings, referenced specifications and the following:

3.2 Mechanical properties - All components shall meet the mechanical properties requirements as specified on the applicable drawing and shall be obtained by heat treating or cold working and stress relief.

3.2.1 Heat treatment - When mechanical properties are achieved by heat treating, each projectile body shall be heated above the upper critical temperature, not to exceed 1600 degrees F., oil quenched and tempered uniformly to meet the mechanical properties specified on the applicable drawing.

3.2.2 Stress relieved - When mechanical properties are achieved by cold shaping each cold worked body shall be stress relieved at a minimum temperature of 700 degrees F. and held at temperature for a minimum of 30 minutes. No work involving plastic flow of metal is permitted after final stress relief.

3.2.3 Hardness pattern - Projectile bodies shall be sectioned and a hardness pattern shall be taken to determine the extent of hardness variation, location of hardness transition zones, absolute hardness values, etc., occuring within any one projectile body produced by the manufacturing process.

3.3 Metal defects

3.3.1 Body - The body, including the cavity shall be free from cracks, splits, bursts, cold shuts, pipe, porosity, inclusions, folds, seams and other metal defects.

3.3.2 Body cavity - The body cavity shall be free of scale, fins, burrs, draw marks, laminations, imbedded foreigm matter, pits and sharp edges.

3.3.3 Visual standards - Visual standards for evaluation of metal defects will be established for each contract after the first months production. However, the establishment of visual standards will not waive the requirement for compliance with 3.3.1 and 3.3.2 (see 6.2).

3.4 Protective coating - Protective coating shall be in accordance with the applicable drawing and the specifications referenced thereon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

3.5 Proving Ground functional tests.-The projectile body assembly shall reveal no evidence of failure when tested at excess and service pressure. Body assembly failure shall be:

a. Permanent deformation exceeding .006 inch in projectile body attributable to noncompliance with drawing and specification requirements.

b. Breakup of the component, in the mortar tube or in flight.

3.6 Workmanship.-The requirements for workmanship are as shown on the applicable drawings in the applicable specifications and the following:

3.6.1 Surface finish.-The requirements for surface finish are as detailed on the applicable drawing.

3.6.2 Threads.-Threads shall be full and undamaged for the entire minimum length as required by the applicable drawings and shall be in accordance with the provisions of MIL-A-2550.

3.6.3 Burr.-No part shall have a burr which might interfere with the assembly or function of the round or which might be injurious to personnel handling the item.

3.6.4 Foreign matter.-No part or assembly shall contain dirt, grease, chips, rust, corrosion, or other foreign matter. Particular attention shall be given to the cavity of the body assembly, to insure that no grit, scale, or other foreign matter remains therein after final cleaning.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.-Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Quality Assurance terms and definitions.-Reference shall be made to MIL-STD-109 to define quality assurance terms used.

4.1.2 Inspection.-Inspection shall be in accordance with MIL-A-2550, except as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.1.3 Inspection criteria.

a. Successful passage of all inspections required by the drawings and specifications shall be considered as a condition precedent to performing the Proving Ground functional tests (see 3.5).

b. Acceptance or rejection of a lot by the Government shall be contingent on successful passage of the Proving Ground functional tests.

4.2 First article sample.

4.2.1 Initial production sample.-At the beginning of regular production, a sample shall be submitted in accordance with contract requirements and shall consist of 60 metal parts assemblies as follows:

55 projectile assemblies complete, painted
5 projectile assemblies complete, unpainted

Fifty of the above-painted projectile assemblies shall be forwarded to a designated proving ground for ballistic testing. The sample shall be manufactured using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be the same as used for the regular production and shall be obtained from the same source of supply. A first article sample or portion thereof as directed by the procuring agency shall also be submitted whenever there is a lapse in production for a period in excess of 90 days or whenever a change occurs in manufacture processes, material used, drawing, specifications or source of supply, such as to significally affect product uniformity as determined by the responsible technical agency.

4.2.1.1 Examination and test.-After inspection and provisional acceptance at source, the sample shall be inspected for all requirements of the drawings and specifications at a Government laboratory or such other facility specified in the contract.

4.2.1.2 Initial production sample failure.-Failure of the sample to comply with requirements of the drawings and specifications shall result in sample disapproval.

4.3 Inspection.

4.3.1 Lot.

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:48Z
Check the source to verify that this is the currentversion before use.

4.3.1.1 Submission of product.-The product shall be submitted in accordance with MIL-STD-105 or MIL-STD-1235, as applicable.

4.3.1.2 Heat treatment lots.-Heat treatment lots shall contain heat treated bodies from not more than one heat of steel that have been heat treated in the same heat treating equipment at the same temperature in one unchanged process. The heat treated lot thus constituted shall form the basis for selecting sample bodies for the tension test hereinafter prescribed.

4.3.1.3 Stress relief lots.-Stress relief lots shall contain cold worked bodies from not more than one heat of steel that have been cold worked by the same process utilizing the same tooling and equipment and stress relieved in the same furnace at the same temperature for the same length of time. The stress relief lot thus constituted shall be the basis for the selection of samples for the tension test hereinafter prescribed.

4.3.1.4 Miscellaneous.-Small lots, such as bodies from abnormally small heats of steel or bodies which have become separated from previously delivered lots, etc., may, at the discretion of the manufacturer, be grouped into miscellaneous heat treatment or stress relief lots as the case may be. Such lots shall be identified by a miscellaneous lot code number.

4.3.1.5 Grouping.-Heat treatment or stress relief lots shall remain grouped together for lot identity purposes, until such time as the results of the tension test have indicated that the lot has complied with the mechanical properties requirements of the applicable drawing.

4.3.1.6 Projectile lot.-All heat treatment or stress relief lots that have been determined to have complied with the mechanical properties requirements of the applicable component drawing, may be re-grouped for assembly into projectile lots. A projectile lot shall consist of projectile assemblies produced by one manufacturer, under one contract, in one unchanged process in accordance with the same drawing, same drawing revision, same specification and same specification revision.

4.3.2 Examination.-One hundred percent examination shall be performed for all critical defects. Examination for major and minor defects shall be performed on a defect basis in accordance with the classification of defects contained herein, using the sampling plans contained in MIL-STD-105. Continuous sampling plans in accordance with MIL-STD-1235 may be used if approved by the procuring activity. An AQL of 0.40 percent for each major defect and an AQL of 0.65 percent for each minor defect shall be used. All nonconforming material shall be rejected. Four power (4X) magnification may be used in performing visual examination. The roughness comparison specimens prescribed by ASA-B46.1 shall be used as a basis for surface roughness determination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.3.2.1 Tool control dimensions.-Dimensions marked tool control shall be gaged at the beginning of each hours production from each machine in operation and whenever tooling is replaced. Where destruction of components is necessary to inspect these dimensions, measurements of the tool may be substituted provided the contractor has established correlation between the tool dimensions and the component dimensions prior to the start of production. The contractor shall be responsible for maintaining adequate surveillance to assure that drawing requirements are being met throughout the life of the tool. All material produced prior to periodic inspection will be rejected and screened whenever a defective tool control dimension is found.

4.3.2.2 Metal Parts, Drawing D10535905 (before paint).

	Defect	Method of Inspection
CRITICAL		
1.	Metal defective	Visual (probe light)
MAJOR		
101.	Weight	Approved Scale
102.	Concentricity of large threads with bourrelet, including perpendicularity of front face	Gage
103.	Concentricity of taper at nose with bourrelet	Gage
104.	Concentricity of taper at rear with bourrelet	Gage
105.	Concentricity of small threads with bourrelet, including perpendicularity of rear face	Gage
106.	Diameter of bourrelet, min.	Gage
107.	Diameter of body, min.	Gage
108.	Depth from front face to base of large cavity	Gage
109.	Depth from rear face to base of small cavity, max.	Gage
110.	Depth of bourrelet grooves	Gage
111.	Length from front face to first outside basic diameter	Gage
112.	Length from front face to second outside basic diameter	Gage
113.	Length from front face to third outside basic diameter	Gage
114.	Length from front face to fourth outside basic diameter	Gage
115.	Length from rear face to rear outside basic diameter	Gage
116.	Length from front face to rear of bourrelet	Gage
117.	Width of small thread undercut, max.	Gage
118.	Variation in wall thickness	Gage
119.	Foreign matter in cavity	Visual

Source: https://assist.dla.mil --,Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.3.2.2 (Cont'd)

Defect	Method of Inspection
MINOR	
201. Diameter of small thread cavity undercut	Gage
202. Depth of large thread cavity, max.	Gage
203. Length from base of cavity to forward inside basic diameter (before or after nosing)	Gage
204. Length from base of cavity to rear inside basic diameter (before or after nosing)	Gage
205. Length, total	Gage
206. Radii or chamfers missing or incorrect	Visual (see 6.1)
207. Surface finish improper	Visual (see 6.1)
208. Burr	Visual
209. Foreign matter (except as otherwise classified)	Visual

4.3.2.3 Metal Parts, Drawing D10535905 (after paint).

CRITICAL	
1. Metal defective	Visual (probe light)
MAJOR	
101. Pitch diameter of large thread, max.	Gage
102. Pitch diameter of large thread, min.	Gage
103. Minor diameter of large thread, max.	Gage
104. Pitch diameter of small thread, max.	Gage
105. Pitch diameter of small thread, min.	Gage
106. Minor diameter of small thread, max.	Gage
107. Diameter of bourrelet, max.	Gage
108. Length of effective thread, min. (forward)	Gage
109. Length of thread, min. (rear)	Gage
110. Paint in cavity inadequate	Visual
111. Pool of paint in cavity	Visual
112. Thread(s) damaged or not full	Visual
113. Foreign matter	Visual
MINOR	
201. Paint on threads	Visual
202. Paint not dry	Visual/Tactile
203. Paint inadequate or damaged	Visual
204. Marking missing, incorrect or illegible	Visual
205. Corrosion preventive compound missing from rear threads	Visual
206. Corrosion preventive compound missing from forward threads	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.3.2.4 Packed carton (prior to sealing).

Defect	Method of Inspection
CRITICAL	
None defined	
MAJOR	
None defined	
MINOR	
201. Support missing or damaged	Visual
202. Separator missing or damaged	Visual
203. Improper assembly	Visual
204. Incorrect number in carton	Visual

4.3.2.5 Packed carton (after sealing).

CRITICAL	
None defined	
MAJOR	
None defined	
MINOR	
201. Carton damaged, cut or gouged through all layers	Visual
202. Carton not completely sealed	Visual
203. Contents loose	Visual
204. Marking missing, incorrect or illegible	Visual

4.3.3 Inspection testing.-The following tests shall be performed in accordance with the provisions of 4.4.

4.3.3.1 Mechanical properties.

4.3.3.1.1 Hardness test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.3.3.1.1.1 Heat treatment lots.-In order to determine uniformity of heat treatment, each body in the heat treatment lot (as defined by 4.3.1.2) shall be subjected to a hardness test with a Brinell Hardness Tester or by any other method of hardness testing approved by the procuring activity.

4.3.3.1.1.2 Stress relief lots.-Twenty-five stress relieved bodies from the first batch of each stress relief lot (as defined by 4.3.1.3) processed through the stress relief furnace and five bodies from each hour's production thereafter for the balance of the lot shall be subjected to a hardness test with a Rockwell Hardness Tester or by any other method approved by the procuring activity, to assess uniformity of the stress relief furnace. Hardness values shall be recorded.

4.3.3.1.1.3 Miscellaneous.-Each miscellaneous lot shall be subjected to the hardness tests listed in paragraphs 4.3.3.1.1.1 or 4.3.3.1.1.2, as applicable.

4.3.3.1.2 Tension test.

4.3.3.1.2.1 Heat treatment lots.-Two bodies, one of the hardest and one of the softest as determined by the hardness test shall be subjected to this test. Failure of any tension test specimen to comply with the mechanical property requirements of the applicable drawing shall be cause for rejection of the lot. At the option of the supplier a production control sample may be utilized to establish the hardness range. When a production control sample is used the hardness range thus established shall be maintained throughout the lot. The size of the sample shall be determined by the supplier. Projectile bodies which fall outside of the established range may be re-heat treated to fall within the range or new mechanical properties may be determined from newly selected projectile bodies which will represent the true extremes of hardness in the heat treatment lot.

4.3.3.1.2.2 Stress relieved lots.-Two bodies, one of the hardest and one of the softest as determined by the hardness test from the first twenty-five bodies selected in accordance with 4.3.3.1.1.2 shall be subjected to this test. Failure of any tension test specimen to comply with the mechanical properties requirements of the applicable drawing shall be cause for rejection of the lot. When it has been determined that the mechanical properties comply and furnace temperature and time have been established, the furnace temperature and time shall be maintained throughout the stress relieved lot. The furnace temperature may vary within twenty-five degrees F. but not below the minimum temperature of 700 degrees F. and the soak time of 30 minutes minimum. Furnace temperature and time will be recorded every hour to assess adequate control of stress relief equipment. The furnace temperature will be calibrated every eight hours by an independent method.

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:48Z
Check the source to verify that this is the currentversion before use.

4.3.3.1.2.3 Miscellaneous lots.-Samples for the tension test of miscellaneous heat treatment or stress relieved lots shall be selected in accordance with 4.3.3.1.2.1 or 4.3.3.1.2.2, as applicable. Failure of any tension test specimen to comply with the mechanical properties requirements of the applicable drawing, shall be cause for rejection of the lot. Double the number of samples shall be selected for miscellaneous lots.

4.3.3.1.3 Hardness pattern.

4.3.3.1.3.1 Heat treatment or stress relieved lots.-The samples supplied in accordance with 4.3.3.1.2.1 or 4.3.3.1.2.2, as applicable, shall also have a hardness pattern obtained to determine the hardest and softest section within the projectile and the basis for selecting the tension test specimens hereinafter prescribed. Failure to comply with the mechanical properties of the applicable drawing shall be cause for rejection of the lot.

4.3.3.2 Magnetic particle inspection.

4.3.3.2.1 After final heat treatment or stress relief and finish machining, bodies shall be inspected by magnetic particle inspection techniques approved by the responsible technical agency according to the following sequence.

(a) 100 percent magnetic particle inspection will be in affect until 2500 consecutive bodies have been inspected and found to be free of metal defects.

(b) Reduced inspection may then be instituted for magnetic particle inspection consisting of 30 bodies per hour for ten consecutive working days.

(c) If no defect is found during the ten days, the sample may be reduced to 15 bodies per hour for five consecutive working days.

(d) If no defect is encountered during the five days, the sample may be reduced to 5 bodies per hour.

(e) If a defect is encountered by magnetic particle inspection during reduced sampling (b through d) the magnetic particle inspection shall revert back to (a) above. In addition a 100 percent back screening to the last acceptable hours production will be performed.

(f) For requalification of reduced sampling, the manufacturer must follow the same procedures as outlined in paragraphs (a through d) above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.3.3.2.1 (Cont'd)

(g) Should a controversy arise as to the validity of an indication, the manufacturer shall use metallographic test methods or an approved non-destructive method for proof of acceptability to the responsible technical agency.

(h) Continual application of a 100 percent magnetic particle inspection by paragraph (a) above, shall not be used as an alternative procedure in lieu of corrective manufacturing process action to eliminate a continuing process enduced defect. If corrective action is not instituted and the cause eliminated, the Government reserves the right to withdraw acceptance inspection until contractor can prove his process is capable of producing suspect free projectiles.

4.3.3.3 Protective coating.-The sample size and acceptance criteria shall be in accordance with the assembly drawing and the requirements of the specifications listed thereon. Failure to comply with the requirements of the applicable specifications shall be cause for taking the corrective action recommended therein.

4.3.4 Proving Ground functional tests.-The following Proving Ground tests will be performed by the Government.

4.3.4.1 First article sample.

4.3.4.1.1 Initial production sample.-The quantities listed in Table I shall be ballistically tested in the phases indicated.

TABLE I

Phase	Quantity
Excess pressure	25
Service pressure	25

4.3.4.2 Production lot sample.-The quantities listed in Table II shall be ballistically tested in the phases indicated.

TABLE II

Phase	Quantity
Excess pressure	10 each lot
Service pressure	10 each lot

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:48Z
Check the source to verify that this is the currentversion before use.

4.3.4.3 Excess pressure.-Samples provided in accordance with Tables I and II will be subjected to this test. Failure of any projectile assembly to comply with 3.5 shall be cause for rejection of the initial production sample or the production lot represented by the sample.

4.3.4.4 Service pressure.-Samples provided in accordance with Tables I and II will be subjected to this test. Failure of any projectile assembly to comply with 3.5 shall be cause for rejection of the initial production sample or the production lot represented by the sample.

4.3.5 Inspection equipment.-Index of Inspection Equipment List Number IEL-10535905 identifies the inspection equipment required to perform the examination and tests prescribed herein. Equipment design shall be in accordance with the code designation specified on the applicable IEL.

4.4 Test methods and procedures.

4.4.1 Mechanical properties.

4.4.1.1 Hardness test.-Prior to finish machining, all bodies that will be subjected to the hardness test shall be prepared by grinding a flat on the cylindrical portion of the body where the obturator band groove will subsequently be machined. The test shall be performed using the equipment and procedures prescribed by Federal Test Method Standard No. 151, except that the minimum dwell time shall be 5 seconds when a Brinell Hardness Test is used.

4.4.1.2 Tension test.-From each sample selected in accordance with 4.3.3.1.2, four tension test specimens conforming to the largest obtainable standard "R" type specimen as prescribed by Federal Test Method Standard No. 151 shall be taken longitudinally from opposite sides of the body, 180 degrees apart. The number of specimens and their location are for the convenience of the contractor or Government and shall not restrict the contractor or Government from testing additional specimens at other locations to determine that the mechanical properties of the projectile meet the drawing requirements. Procedures and criteria for determining yield strength, elongation, reduction in area and tensile strength shall be as prescribed by Federal Test Method Standard No. 151, except that elongation shall be measured to the nearest thousandth (0.000) prior to conversion into percent elongation. Percent elongation shall be recorded to the nearest tenth (0.0).

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:48Z
Check the source to verify that this is the current version before use.

4.4.1.2.1 Hardness pattern - From the bodies selected for the tension test, a hardness pattern shall be obtained by removing a longitudinal section, at least one-half inch thick extending the length of the projectile body. The section shall be removed from approximately the center of the projectile where the centerline of the specimen is with the walls of the specimen. The longitudinal walls shall be ground flat and parallel. The hardness test shall be performed on one side of the ground surface $\frac{1}{4}$ of an inch apart along the longitudinal axis (see Figure I). Tension test specimens shall be taken from the hardest and softest sections of the body as indicated by the hardness pattern. In cases where tension test specimens cannot be removed from the hardest and softest areas because of the geometry of the projectile or shape of the hardness pattern, such as, transition zone, the matter shall be referred to the responsible technical agency for evaluation.

4.4.2 Magnetic particle inspection - The procedures for performing this test utilizing the wet fluorescent method shall be as specified in MIL-I-6868, for indirect magnetization by either the continuous method or the residual method, utilizing a circular magnetic field. The suspension shall be applied to the entire body, inside and outside. After draining, the body shall be thoroughly inspected in a darkened area under an ultra-violet light which will produce adequate fluorescence of the magnetic particles. The solid content of the suspension shall be maintained at 0.15 to 0.4 milliliter (ml) of solids per 100 ml of suspension. The suspension shall be checked at the start of each day's production and at intervals of not over 4 hours of continuous operation, utilizing the procedures and equipment prescribed by specification MIL-I-6868. When performing the test for solid content of the suspension, if it is determined that it does not comply, all projectile bodies that have been tested and accepted since the last satisfactory test was performed shall be re-tested after the suspension has been brought to the proper level. After acceptance the body shall be demagnetized and cleaned. The magnetic particle inspection shall be performed on equipment that complies with the requirements of PA-PD-792. The operator(s) of the equipment and inspector(s) making the determinations shall be certified in accordance with MIL-STD-410.

4.4.3 Protective coating - The procedures for testing the cleaning of components and the application of protective coating shall be in accordance with the requirements of the applicable drawing and the specifications listed thereon. The salt spray test shall be performed utilizing equipment prescribed by Federal Test Method Standard No. 141.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.4.4 Proving Ground functional tests.

4.4.4.1 Excess pressure.-The samples supplied in accordance with Tables I and II inert loaded to the service weight and dummy fuzed will be assembled into complete rounds and fired for recovery in a mortar for which the round is standard. The propellant charge will be adjusted to produce 112 percent of the maximum rated pressure of the round in a new mortar.

4.4.4.2 Service pressure.-The samples supplied in accordance with Tables I and II, inert loaded and fuzed will be assembled into complete rounds utilizing the service charge and fired in a mortar for which the round is standard for comparison with an equal number of rounds from a reference lot. The sample round and reference rounds will be fired alternately. Horizontal and vertical distances will be recorded for each round fired for determination of horizontal and vertical propable error (PE) in mils to assess accuracy. Data obtained will be recorded for information only and forwarded to the cognizant technical agency.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.-Packaging, packing and marking shall be in accordance with the requirements of level C in MIL-STD-1169.

5.2 Data cards.-Data card information shall be as specified in MIL-STD-1167.

6. NOTES

6.1 Visual examination qualification.-When compliance with the applicable requirement is in doubt as a result of visual examination, this characteristic may be measured or gaged to determine acceptability.

6.2 Visual standards.-Visual standards to be established at contractors plant in accordance with 3.3.3.

6.3 Ordering data.-Procurement documents should specify the title, number, and date of this specification.

Custodian:

Army - MU

Preparing activity

Army - MU(FA)

Project No. 1310-A146

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

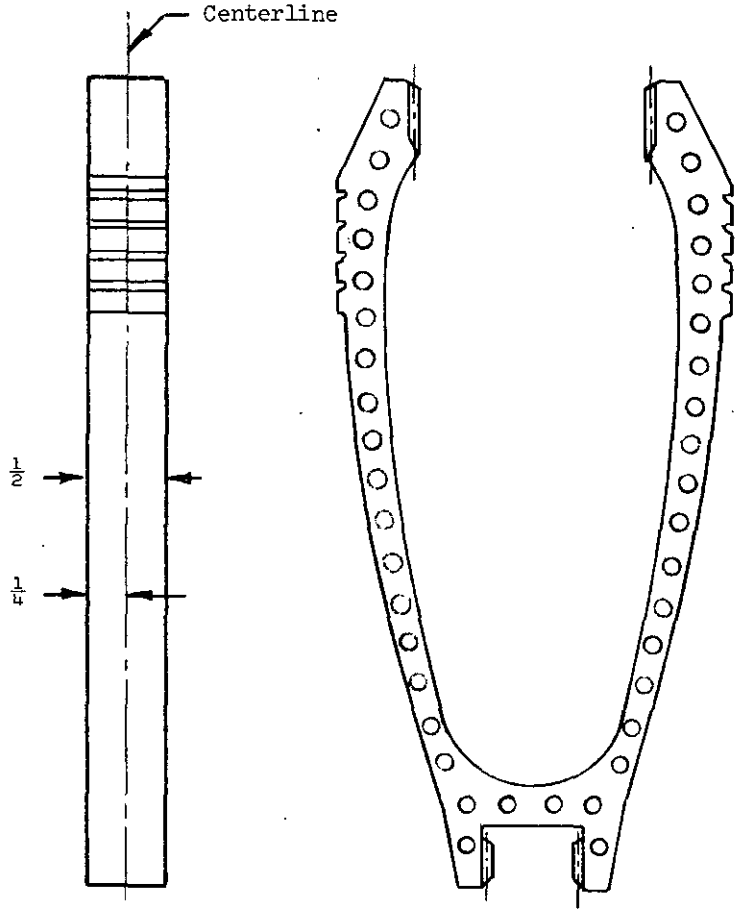


FIGURE I

Hardness Pattern

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
Department of the Army

OFFICIAL BUSINESS

Commending Officer
Frankford Arsenal
ATTN: SMUFA-T1000
Philadelphia, Pa. 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. *Fold on lines on reverse side, staple in corner, and send to preparing activity.* Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

[ ] YES [ ] NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.