MIL-P-82518(OS)
17 November 1967

Superseding
NOTS XS 505 Rev. H
10 July 1967

MILITARY SPECIFICATION
FOR
POWER SUPPLY (THERMAL)
MARK 123 MOD 0

This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy

1. SCOPE

1.1 This specification establishes the requirements of one type of Power Supply (Thermal) Mark 123 Mod 0. (See 6.1 for intended use and description).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein except as noted.

SPECIFICATION

FEDERAL

PPP-B-621	Boxes, Wood, Nailed and Lock-Corner

MILITARY

MIL-P-116	Preservation, Methods of
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for
MIL-L-10547	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible

FSC -1135

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:13Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-102	Preservation, Packaging and Packing Levels

MILITARY

MIL-STD-105D	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-167	Mechanical Vibrations of Shipboard Equipment

DRAWINGS

BUREAU OF NAVAL WEAPONS

LD 497918	Power Supply (Thermal) Mark 123 Mod 0 and all documents listed thereon
LD 615605	Tester, Acceptance, Power Supply
DWG 1808369-2	Screw

PUBLICATIONS

BUREAU OF NAVAL WEAPONS

OD 13778	Operation and Maintenance Instructions for Acceptance Tester for Thermal Power Supply Mark 123 Mod 0

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. Unless otherwise specified in the contract or order, all materials and treatments of materials and parts used in the manufacture of the power supply shall be in accordance with the requirements specified herein and with the applicable documents listed in BuWeps LD 497918.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

3.2 Preproduction samples. Unless otherwise specified in the contract or order, preproduction samples of the power supply shall be manufactured using the methods and procedures proposed for production. The sample shall be tested as specified in Section 4 herein and is for the purpose of determining that, prior to starting production, the contractor's production methods are capable of yielding items that comply with the technical requirements of the contract.

3.3 Performance and product characteristics. The power supply shall meet the following performance and product characteristics.

3.3.1 Circuit requirements, before functioning.

3.3.1.1 Initiation circuit resistance. Each initiation circuit of the power supply shall have a resistance of 0.700 plus or minus 0.125 ohm.

3.3.1.2 Normally open circuit resistance. The normally open circuit of the power supply shall have a resistance of not less than 20 megohms, when a potential of 500 plus or minus 50 volts DC is applied between the circuit terminals.

3.3.1.3 Normally closed circuit resistance. The normally closed circuit of the power supply shall have a resistance of not greater than 0.10 ohm between the circuit terminals.

3.3.1.4 Zener diode resistance. The voltage output circuit of the power supply, with the proper polarity applied, shall have a resistance of not less than 20 megohms.

3.3.1.5 Insulation resistance. The power supply shall have an insulation resistance of not less than 20 megohms between each independent circuit, when the applied potential is 500 plus or minus 50 volts DC.

3.3.2 Function

3.3.2.1 Initiation voltage. The power supply shall function when 3.15 volts, root mean square (rms), 60 cycles per second (cps) is applied to each initiation circuit.

3.3.2.2 Monitor circuit function. The power supply shall close the normally open circuit in not greater than 0.85 second from the instant the initiation voltage is applied to each initiation circuit.

3.3.2.3 Voltage output. The power supply shall produce the voltage as shown in Figure 1 with the loads and sequence specified.

3.3.3 Circuit requirements after functioning.

3.3.3.1 Normally open circuit resistance. The normally open circuit of the power supply shall have a resistance of not greater than 0.05 ohm between the circuit terminals.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

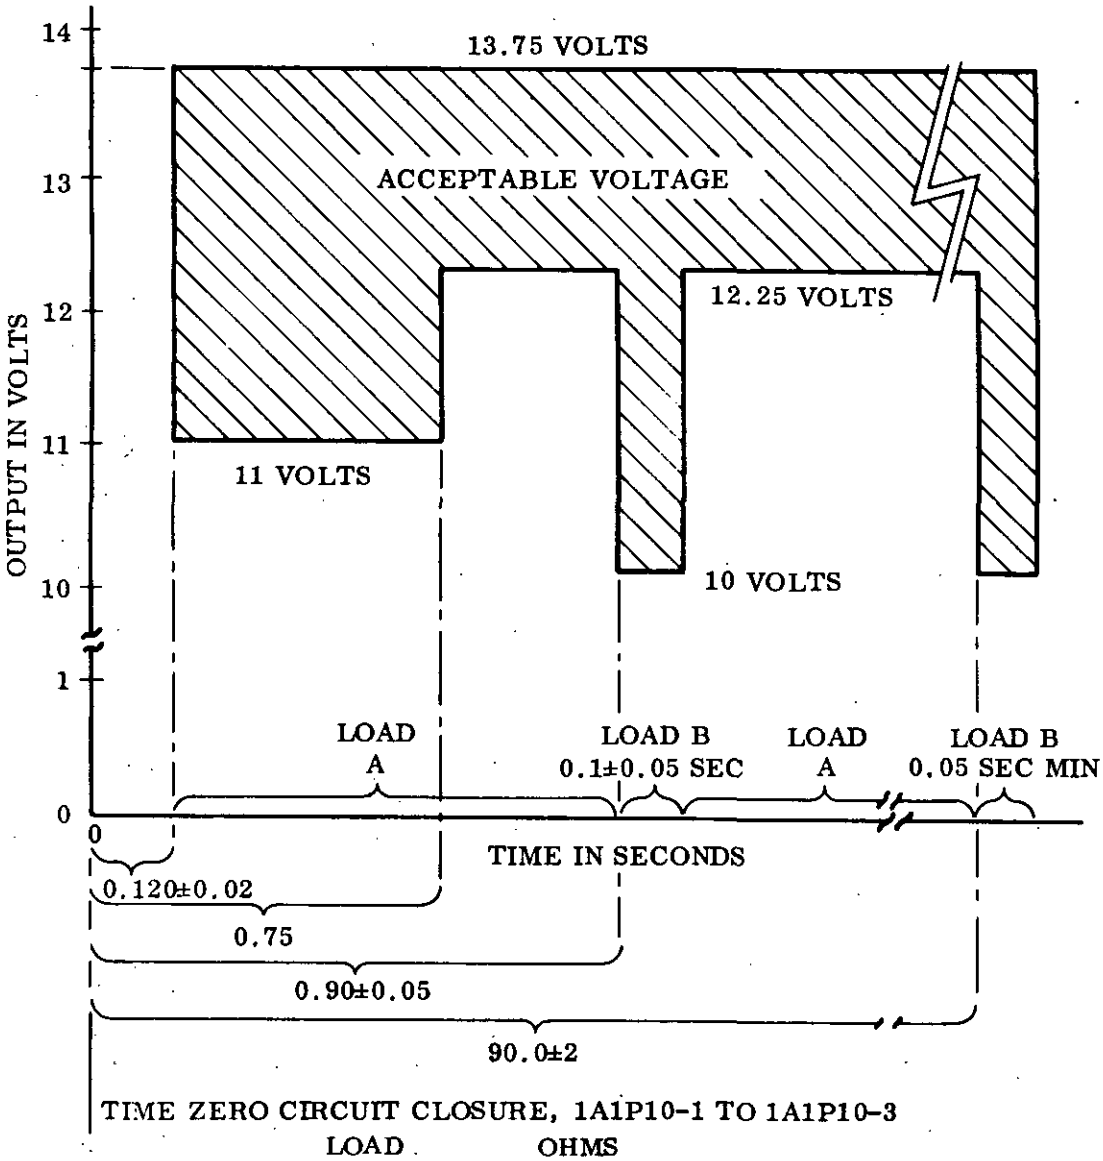


Figure 1. Power Supply Voltage Output

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

3.3.3.2 Normally closed circuit resistance. The normally closed circuit of the power supply shall have a resistance of not less than 20 megohms under an applied potential of 500 plus or minus 50 volts DC between the circuit terminals.

3.4 Environmental requirements. Unless otherwise specified, the power supply shall be capable of conforming to the performance and product characteristics of this specification after being exposed to the environments and all conditions specified herein.

3.4.1 Temperature, storage condition. The power supply shall withstand temperatures from minus 65 to plus 160 degrees Fahrenheit (F).

3.4.2 Humidity. The power supply shall withstand relative humidity up to 95 percent as specified in MIL-E-5272, Procedure I.

3.4.3 Fungus. The power supply shall withstand fungus conditions as specified in MIL-E-5272, Procedure I.

3.4.4 Sand and dust. The power supply shall withstand sand and dust conditions as specified in MIL-E-5272, Procedure II.

3.4.5 Salt spray. The power supply shall withstand salt spray conditions as specified in MIL-E-5272, Procedure I for a period of 50 hours.

3.4.6 Shock, standby condition. The power supply shall withstand shocks of 40g (g=unit of gravitational acceleration) peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 5 milliseconds.

3.4.7 Vibration.

3.4.7.1 Standby condition. The power supply shall withstand vibration as specified for Type I equipment in MIL-STD-167 up to 25 cps.

3.4.7.2 Operating condition. The power supply shall withstand vibration through a frequency range of 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less, and shall meet the performance and product characteristics herein during this vibration.

3.4.8 Temperature, operating condition. The power supply shall meet the performance and product characteristics while at temperatures from 35 to 120 degrees F.

3.4.9 Acceleration. The power supply shall withstand acceleration of 25g for 4 seconds and shall meet the voltage output requirements specified in 3.3.2.3 during acceleration.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. The workmanship and finish shall be of sufficiently high grade to assure satisfactory operation consistent with the requirements of this specification. All parts used in the assembly shall be thoroughly clean and free of excess materials, chips, and loose or splattered foreign materials. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection of the power supply shall be classified as follows:

a. Preproduction and periodic inspection. (See 4.5.)

b. Quality conformance inspection. (See 4.6.)

4.3 Sampling. (See 6.2.1.)

4.3.1 Lot size. The term "lot" shall mean "inspection lot", that is a collection of product submitted by a supplier for inspection. Unless otherwise specified in the contract or order, the number of product in each lot shall be three hundred (300).

4.3.2 Preproduction sample. A preproduction sample of twenty (20) power supplies, manufactured in accordance with 3.2, shall be subjected to the preproduction tests detailed in 4.5. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the power supply by the supplier, prior to approval of the preproduction sample, shall be at the supplier's risk.

4.3.3 Periodic production sample. From each succeeding lot of three hundred (300) or less, a random sample of eleven (11) power supplies shall be selected. These sample units shall be subjected to the tests of 4.5. The power supplies shall be considered satisfactory if they meet all specification and pertinent drawing requirements and withstand the tests specified in 4.5. (See Table I.) When a defective unit is found in any lot, acceptance of all units in the lot shall be withheld and the contractor shall:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

a. Determine the cause of the defect.

b. Take the necessary action, with the concurrence of the procuring activity, to correct or eliminate the defect from all units in the lot and, if so directed by the procuring activity, from those units previously shipped.

c. Submit to the procuring activity for approval, the proposed corrective action to prevent recurrence of the defect.

Table I. Preproduction and Periodic Production Test Sequence

Test	Paragraph Number	Test Quantities Preproduction	Periodic
Circuit Requirements, Prior to Function	4.6.1.1	20	11
Temperature, Storage Condition	4.5.1.1	20	3
Humidity	4.5.1.2	20	3
Fungus	4.5.1.3	20	-
Quality Conformance Inspection	4.6	4*	3*
Sand and Dust	4.5.1.4	16	-
Salt Spray	4.5.1.5	16	3
Shock, Standby Condition	4.5.1.6	16	3
Vibration, Standby Condition	4.5.1.7	16	3
Quality Conformance Inspection	4.6	4*	3*
** Temperature, Operating Condition Low Extreme	4.5.1.8.1	4	2
** Vibration, Operating Condition	4.5.1.9	4	2
** Quality Conformance Inspection	4.6	4*	2*
** Temperature, Operating Condition High Extreme	4.5.1.8.2	4	2
** Vibration, Operating Condition	4.5.1.9	4	2
** Quality Conformance Inspection	4.6	4*	2*
*** Acceleration	4.5.1.10	4	1
*** Voltage Output Test	4.6.1.2.3	4*	1*

* Samples are expended during functioning
** To be performed concurrently; see 4.5.1.8 and 4.5.1.9
*** Conduct 4.5.1.6 and 4.5.1.7 prior to 4.5.1.10

4.3.4 Quality conformance inspection sampling. Samples shall be selected as specified in 4.6 and shall be used to determine the acceptability of the power supply inspected as specified in 4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.4 Test equipment and test conditions.

4.4.1 Quality conformance inspection equipment. The following items of test equipment are required to perform the quality conformance inspection tests.

Equipment	Capability
a. Tester, Acceptance, Power Supply	Conform to LD 615605; operate in accordance with OD 13778
b. Megohmmeter	Measure insulation resistance of 20 megohms: accuracy 5 percent; applied potential 500 plus or minus 50 volts DC.
c. Milliohmmeter	Measure resistance of 0.0 to 1.0 ohm with a current output of not greater than 10 milliamperes: accuracy 5 percent full scale.
d. Ohmmeter	Measure resistance of 1 to 50 megohms: accuracy 5 percent and a current output of not greater than 10 milliamperes.

4.4.2 Preproduction and periodic production test equipment. The following items of test equipment, in addition to selected items of quality conformance inspection equipment and equipment recommended by applicable specifications or standards referenced within test procedure paragraphs, are required to perform the preproduction and periodic production tests:

Equipment	Capability
a. Temperature chamber	Maintain temperature at: Minus 65 plus 5 minus 0 degrees F Plus 35 plus 5 minus 0 degrees F Plus 120 plus 0 minus 5 degrees F Plus 160 plus 0 minus 5 degrees F
b. Shock equipment	Apply shocks of 40 plus or minus 4g; a one-half sine wave pulse shape having a duration of 5 plus 3 minus 0 milliseconds: maintain direction along specified axes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Equipment	Capability
c. Vibration testing machine	Control frequency from 20 to 2000 cps while subjecting the test item to 0.10-inch double amplitude or 10g acceleration, whichever is less; maintain direction of vibration along specified axes.
d. Centrifuge having nine slip rings, minimum	Accelerate power supply at 25 plus 2.5 minus 0g. Two slip rings must carry 5 amperes; others must carry 1 ampere.

4.4.3 Test conditions. Unless otherwise specified, the power supply shall be subjected to the preproduction and periodic production tests and quality conformance inspection tests under the following conditions:

a. Temperature: Room ambient (65 to 95 degrees F)

b. Altitude: Normal ground atmospheric pressure

c. Humidity (Relative): Room ambient up to 95 percent

4.5 Preproduction and periodic production inspections. The preproduction and periodic production samples shall be subjected to the tests specified in 4.5.1, as indicated in Table I, after satisfactorily passing the quality conformance inspection detailed in 4.6.1.1 and 4.6.1.4.

4.5.1 Test procedure. Subject the power supply to the test sequence listed in Table I. Unless otherwise specified in the individual test paragraph, the quality conformance inspection, as specified in Table I shall be performed subsequent to environmental tests under test conditions specified in 4.4.3. Failure of the power supply to pass any one of these tests shall constitute a defective unit.

4.5.1.1 Temperature, storage condition. The power supply shall be subjected to a temperature of minus 65 plus 5 minus 0 degrees F for not less than 48 hours. The temperature shall be raised to plus 160 plus 0 minus 5 degrees F in not less than 2 hours and maintained at this temperature for not less than 48 hours. The unit shall then be subjected to room temperature for not less than 4 hours prior to performing subsequent tests.

4.5.1.2 Humidity. The power supply shall be subjected to Humidity Test, Procedure I, as specified in MIL-E-5272. The connectors of the power supply shall be hermetically sealed from the humid atmosphere during this test.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

4.5.1.3 Fungus. Unless otherwise specified in the contract or order, this test shall be performed on preproduction sample units only. The power supply shall be subjected to Fungus Test, Procedure I, as specified in MIL-E-5272.

4.5.1.4 Sand and dust. Unless otherwise specified in the contract or order, this test shall be performed on preproduction sample units only. The power supply shall be subjected to Sand and Dust Test, Procedure I, Part I, as specified in MIL-E-5272.

4.5.1.5 Salt spray. The power supply shall be subjected to Salt Spray Test, Procedure I, as specified in MIL-E-5272 for 50 hours. The connectors of the power supply shall be hermetically sealed from the moist atmosphere during this test.

4.5.1.6 Shock, standby condition. Mount the power supply as shown in Figure 2. Subject the power supply to shocks of 40 plus or minus 4g peak magnitude with a pulse shape approximating a one-half sine wave, having a duration of 5 plus 3 minus 0 milliseconds. Shocks shall be applied three times in each direction along each of three mutually perpendicular axes as shown in Figure 2.

4.5.1.7 Vibration, standby condition. The power supply, mounted as shown in Figure 2, shall be subjected to the vibration tests for Type I equipment as specified in MIL-STD-167 up to 25 cps in each of the three axes shown in Figure 2.

4.5.1.8 Temperature, operating condition. Divide the sample into two equal parts as indicated in Table I. One-half of the sample shall be subjected to the low temperature test as specified in 4.5.1.8.1, and the remaining half of the sample shall be subjected to the high temperature test as specified in 4.5.1.8.2.

4.5.1.8.1 Low extreme. Subject the power supply to a temperature of 35 plus 5 minus 0 degrees F for not less than 4 hours. At the end of this period and while at this temperature, the power supply shall pass the quality conformance inspection of this specification. The functional tests of 4.6.1.2 shall be performed while being subjected to vibration as specified in 4.5.1.9.

4.5.1.8.2 High extreme. Subject the power supply to a temperature of 120 plus 0 minus 5 degrees F for not less than 4 hours. At the end of this period and while at this temperature, the power supply shall pass the quality conformance inspection of this specification. The functional tests of 4.6.1.2 shall be performed while being subjected to vibration as specified in 4.5.1.9.

4.5.1.9 Vibration, operating condition. This test is to be performed concurrently with the temperature operating test of 4.5.1.8 as indicated in Table I. Mount the power supply as shown in Figure 2. Subject the power supply to vibration from 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less, along each of the three mutually perpendicular axes. The frequency shall be increased uniformly from 20 to 2000 cps. The frequency shall be traversed in

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

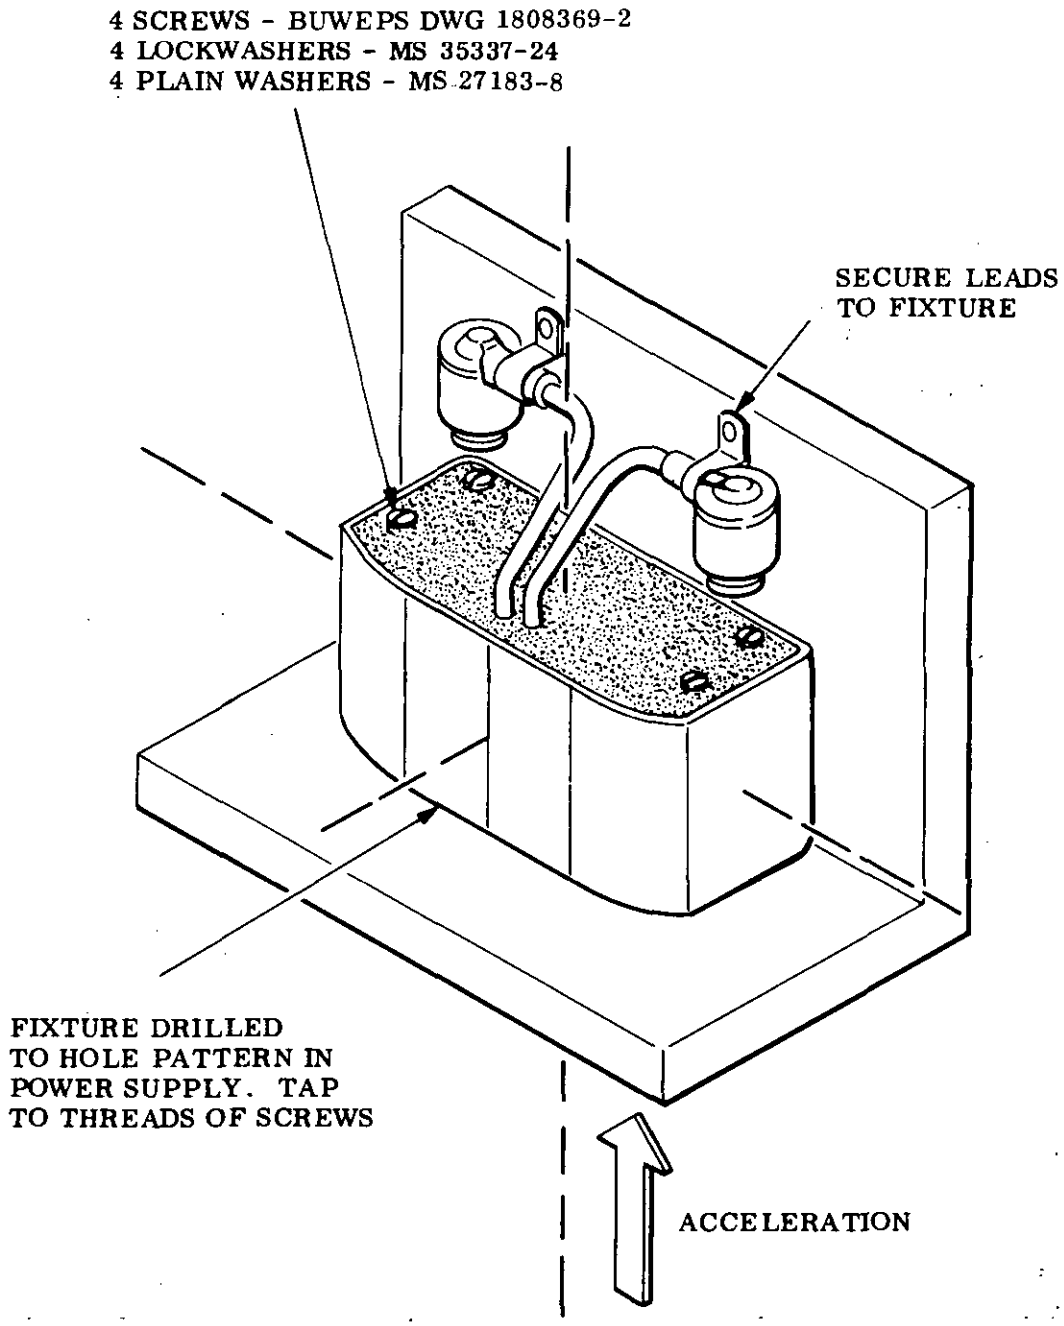


Figure 2. Power Supply Mounting for Shock, Vibration and Acceleration

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

not less than 2.5 minutes, once in each axis. During the frequency sweep of the last axis, the power supply shall pass the functional tests of 4.6.1.2, and thereafter shall pass the circuit requirements of the tests specified in 4.6.1.3.

4.5.1.10 Acceleration. Subject the power supply to an acceleration of 25 plus 2.5 minus 0g in the direction shown in Figure 2 for not less than 4 seconds. During acceleration the power supply shall pass the voltage output test of 4.6.1.2.3.

4.6 Quality conformance inspection. Samples selected using the plans and procedures set forth in Table II of this specification shall be subjected to the tests and examinations as described in 4.6.1.

Table II. Quality Conformance Tests and Examinations and AQL

Test	Paragraph Number	Sampling Plan	AQL
Initiation circuit resistance	4.6.1.1.1	*	0.25
Normally open circuit resistance	4.6.1.1.2	*	1.00
Normally closed circuit resistance	4.6.1.1.3	*	1.00
Zener diode resistance	4.6.1.1.4	*	0.25
Insulation resistance	4.6.1.1.5	*	1.00
Initiation voltage	4.6.1.2.1	**	0.25
Monitor circuit function	4.6.1.2.2	**	0.25
Voltage output	4.6.1.2.3	**	0.25
Normally open circuit resistance	4.6.1.3.1	**	1.00
Normally closed circuit resistance	4.6.1.3.2	**	1.00
Visual examination	4.6.1.4	***	***
Preservation, packaging, packing, and marking	4.7	***	***

*MIL-STD-105D Inspection Level II
**MIL-STD-105D Special Inspection Level S-3; zero defects accepted.
***One-hundred percent inspection: defect is cause for rejection of individual unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.6.1 Test procedure. The power supply shall be subjected to the tests and examinations as outlined herein. Unless otherwise specified, inability of the power supply to pass the tests and examinations shall constitute a failure.

4.6.1.1 Circuit requirements, prior to function.

4.6.1.1.1 Initiation circuit resistance. Using the milliohmmeter specified in 4.4.1c, measure the resistance between terminals 5 and 7 and between terminals 5 and 2 of connector 1A1P10. The resistance shall be 0.700 plus or minus 0.125 ohm.

4.6.1.1.2 Normally open circuit resistance. Using the megohmmeter specified in 4.4.1b, measure the resistance between terminals 1 and 3 of connector 1A1P10. The resistance shall be not less than 20 megohms under an applied potential of 500 plus or minus 50 volts DC.

4.6.1.1.3 Normally closed circuit resistance. Using the milliohmmeter specified in 4.4.1c, measure the resistance between terminals 2 and 3 of connector 1A1P4. The resistance shall be not greater than 0.10 ohm.

4.6.1.1.4 Zener diode resistance. Using the ohmmeter specified in 4.4.1d, measure the resistance between terminals 4 and 6 of connector 1A1P4. Polarity of the applied potential shall be minus to plus from terminals 4 to 6 respectively. The resistance between terminals 4 and 6 shall be not less than 20 megohms when zener diode is properly installed.

4.6.1.1.5 Insulation resistance. Short together terminals 2, 5, and 7 of connector 1A1P10; short together terminals 4 and 6 of connector 1A1P4. Using the megohmmeter specified in 4.4.1b, measure the insulation resistance between the following listed terminals. The insulation resistance between terminals shall be not less than 20 megohms at a potential of 500 plus or minus 50 volts DC.

1A1P10-1 to 1A1P10-2	1A1P10-2 to 1A1P4-4
1A1P10-1 to 1A1P4-2	1A1P10-3 to 1A1P4-2
1A1P10-1 to 1A1P4-4	1A1P10-3 to 1A1P4-4
1A1P10-2 to 1A1P10-3	1A1P4-2 to 1A1P4-4
1A1P10-2 to 1A1P4-2	

4.6.1.2 Functioning Tests. The power supply shall simultaneously be subjected to the following functional tests using the tester specified in 4.4.1a.

4.6.1.2.1 Initiation voltage. Apply 3.15 volts rms, 60 cps, to terminals 2 and 5 and to terminals 7 and 5 of connector 1A1P10. The power supply shall function.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.6.1.2.2 Monitor circuit function. Measure the time interval between application of the initiation voltage and opening of the normally closed circuit, terminals 2 and 3 of connector 1A1P4. The time interval shall not exceed 0.85 seconds.

4.6.1.2.3 Voltage output. Apply resistance loads, across output terminals 4 and 6 of connector 1A1P4, of the magnitude and in the sequence specified in Figure 1. Record the output voltage versus time after the initiation voltage is applied to the power supply. The output voltage shall be within the region specified in Figure 1.

4.6.1.3 Circuit requirements, after functioning.

4.6.1.3.1 Normally open circuit resistance. Using the milliohmmeter specified in 4.4.1c, measure the resistance between terminals 1 and 3 of connector 1A1P10. The resistance shall be not greater than 0.05 ohm.

4.6.1.3.2 Normally closed circuit resistance. Using the megohmmeter specified in 4.4.1b, measure the resistance between terminals 2 and 3 of connector 1A1P4. The resistance shall be not less than 20 megohms, when the applied potential is 500 plus or minus 50 volts DC.

4.6.1.4 Visual examination. Visual examination shall be made on each power supply submitted for delivery to the procuring activity. The power supply shall be examined for conformance to the requirements of good workmanship in 3.5. Nonconformance is cause for rejection of individual unit.

4.7. Preservation, packaging, packing, and marking. The power supply shall be examined for conformance to the prescribed preservation, packaging, packing, and marking requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified. (See 6.2b and 6.4.)

5.1.1 Level A.

5.1.1.1 Cleaning. The power supply shall be cleaned in accordance with Method C-1, MIL-P-116.

5.1.1.2 Drying. The power supply shall be dried in accordance with Method D-2, MIL-P-116.

5.1.1.3 Unit packaging. The power supply shall be individually packaged in accordance with Method 1A-8, MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Cleaning, drying, preservation and packaging shall be in accordance with the supplier's commercial practice, when such practices have been approved by the procuring activity.

5.2 Packing. Packing shall be level A or C as specified. (See 6.2c and 6.4.)

5.2.1 Level A. Unless otherwise specified in the contract or order, 4 power supplies, packaged as specified in 5.1.1, shall be packed in exterior type shipping container PPP-B-621. Containers shall be provided with a case liner, MIL-L-10547, and shall be closed and strapped in accordance with PPP-B-621.

5.2.2 Level C. The power supplies, packaged and specified in 5.1.2, shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with common carrier regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use and description.

6.1.1 Intended use. The power supply is intended to be used in a rocket propelled missile as a source of electric power.

6.1.2 Description. The power supply contains two thermal batteries, two driver actuated switches, two avalanche diodes, one zener diode, and one resistor. The power supply is activated when external power is applied to the initiation circuits. The thermal batteries are connected in parallel and, when activated, supply power through the resistor and across the zener diode to a pair of output leads. The zener diode regulates the output voltage at 12.75 volts DC. Two switching circuits are connected in parallel with the batteries. Each circuit consists of a diode in series with a driver actuated switch having a normally open contact and a normally closed contact. When the batteries are initiated and the voltage reaches the required level, the diodes conduct and initiate the switches. Closing of the open contacts and opening of the normally closed contacts indicate battery activation.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Required level of preservation and packaging.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

c. Required level of packing.

d. Any exceptions to this specification.

6.2.1 Additional samples. Additional samples required because of failure of any sample(s) to pass the prescribed inspections shall be provided and inspected at the expense of the supplier.

6.3 Definitions. For the purpose of this specification the following definitions have been established.

6.3.1 Unit condition.

6.3.1.1 Standby. Standby is the condition of the power supply when aboard ship and is assembled into the end item.

6.3.1.2 Operating. The condition of the power supply during missile operation.

6.4 Preparation for delivery criteria. Criteria for use of the proper level of preservation, packaging, and packing shall be as specified in FED-STD-102.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.