INCH-POUND

MIL-R-70834A (AR)
22 March 1991
SUPERSEDING
MIL-R-70834 (AR)
15 April 1990

MILITARY SPECIFICATION

RECEIVER, CHANNEL X: 11784801

This Specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes requirements for Channel X Receiver which is part of the Target Holding Mechanism/Tank Gunnery (THM/TG) Unit.

2. APPLICABLE DOCUMENTS.

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications,standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Material, General Specification Governing the Manufacture and Inspection of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5895

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

MIL-A-70833 - Automatic Tank Target: 11784501
MIL-T-70835 - Transmitter Assembly: 11784701

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 - Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

2.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this specification to the extend specified herein. Unless otherwise specified, the issues shall be those in effect on the date of solicitation.

DRAWINGS (See 6.4)

U.S. ARMY ARMAMENT, RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

9375750 - Receiver, Cable Assembly
11784801 - Receiver, Channel X

SPECIAL PACKAGING INSTRUCTIONS

PS11784801 - Special Packaging Instructions for Receiver Channel X

(Copies of drawings, publications, and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS.

3.1 General description. The Channel X Receiver is located at the target unit. It receives FM transmitted, digital coded signals from a portable operator controlled transmitter: MIL-T-70835. The receiver is a component of the automatic tank target assembly: MIL-A-70833 and shall receive commands to raise and lower armor vehicle targets. Operational power is provided by the automatic tank target assembly through the electronic control unit.

3.2 Fabrication. The receiver shall be manufactured in accordance with drawing 11784801 and Military Specifications MIL-F-13926 and MIL-STD-2000.

3.2.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2.2 Components and assemblies. The components and assemblies shall comply with all requirements specified in this specification and on Drawing (Dwg) 11784801 and all associated drawings, and with all requirements specified in applicable specifications and standards.

3.3 Performance.

3.3.1 Commands. The Channel X Receiver shall receive commands from the transmitter and channel commands to the electronic control unit of the automatic tank target assembly. Commands shall through the electrical/hydraulic mechanism raise target, lower target or activate hit indicators: visual hit indicator lamp (VHIL) or gunfire simulator (GUFS).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

3.3.2 Interfaces. Pin connectors for the 12 volt command signal of raise, lower or fire shall be received through the electronic control unit from the receiver as follows:

Receiver Cable Assembly 9375750	Electronic Control Unit
Connector	Connector
D Raise	D Raise
E Fire	E Fire
F Lower	F Lower

3.4 Electrical requirements.

a. The receiver shall have a sensitivity of 0.9 millivolts or better.

b. The receiver shall have a selectivity of greater than 70 db (at the 3 db points).

c. The receiver shall have a bandwidth of 10 kHz (at the 3 db points).

d. The receiver shall not accept signals 50 KHz from its operating frequency.

e. The receiver shall have an IF frequency of 10.7 MHz.

f. The receiver current drain in a standby mode shall not exceed 13 ma. The receiver operating mode current drains shall be less than or equal to 100 ma.

g. The receiver shall have a spurious rejection of greater than 70 db.

h. The receiver shall be capable of operating from a 12 VDC (nominal) battery supply and have capability of operating down to 11.0 VDC. Power will be supplied by the Automatic Tank Target Assembly Electronic Control Unit.

3.5 Environmental requirements.

3.5.1 Temperature.

3.5.1.1 Operating. The receiver shall meet the requirements of 3.3 and 3.4 when stabilized thermally at -25 degrees F and +125 degrees F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

3.5.1.2 Non-operating (storage). The receiver when subjected to at least four hours at each temperature extreme of -40 degrees F and +160 degrees F shall meet the requirements of 3.3 and 3.4 when returned to and thermally stabilized at ambient temperature (+60 degrees F to +90 degrees F).

3.5.2 Vibration. The receiver shall meet the requirements of 3.3. and 3.4 after being subjected to Method 514, Procedure I-3.3.1, using figure 514.4-1 of MIL-STD-810 for one hour of random vibration in the vertical axis.

3.5.3 Immersion (non-operating). The receiver shall show no evidence of internal moisture after being subjected to at least two hours of immersion in one meter of water per MIL-STD-810, Method 512.

3.6 First article inspection. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.2).

3.7 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement TASK F of paragraph 1.2 of MIL-STD-2000.

3.8 Workmanship. The workmanship requirements of MIL-F-13926 shall apply.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facility suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5 and all applicable drawings. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submmitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 General provision. The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of quality assurance terms shall be as listed in MIL-STD-109.

4.2 First article inspection.

4.2.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three (3) Receivers for inspection in accordance with 4.2.2.

4.2.2 Inspections to be performed. First article assemblies, components and test specimens may be subjected by the Government to any or all of the examinations and tests specified in Table I (Functional Test) and Table II (Special Sampling) herein and to any or all requirements of the applicable drawings.

4.2.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

4.3 Inspection provisions.

4.3.1 Submission of product. Shall be as specified by the contracting officer under submission of product.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Quality Assurance Provisions (QAPs) listed in the Technical Data Package (TDP). In the absence of a QAP, the applicable quality assurance provisions of MIL-STD-2000 and MIL-F-13926 shall apply.

4.3.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in Table I herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in Table I shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE I. Functional Test

(100% inspection)

Characteristic		Requirement	Test Procedure
Critical:		None	
Major:			
101.	Performance	3.3	4.5.4
102.	Sensitivity	3.4a	4.5.4
103.	Selectivity	3.4b	4.5.4
104.	Bandwidth	3.4c	4.5.4
105.	50 KHz Difference Rejection	3.4d	4.5.4
106.	IF Frequency	3.4e	4.5.4
107.	Current Drain	3.4f	4.5.4
108.	Spurious rejection	3.4g	4.5.4
109.	Power	3.4h	4.5.4
110.	Soldering	3.7	4.6
111.	Workmanship	3.8	Visual
Minor:		None	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

4.3.3 Special sampling. One receiver assembly shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever occurs first. The control sample shall meet the requirements and tests in Table II.

TABLE II. Special sampling

Control Test	Requirement	Test Procedure
201. Temperature (operating)	3.5.1.1	4.5.2, 4.5.2.2
202. Vibration (non-operating)	3.5.2	4.5.3.3
203. Immersion test	3.5.3	4.5.3.4

4.4 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of the contract. Prior to acceptance, inspection equipment designs shall be submitted and approved by the Government (see 6.3).

4.4.1 Government furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of the contract.

4.4.2 Contractor furnished inspection equipment.

4.4.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the applicable technical data listed in the TDP.

4.4.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.5 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be as such to facilitate routine calibration of test equipment.

4.4.2.3 Test equipment. In conjunction with 4.4.2.1 and 4.4.2.2, the test equipment listed in Table III shall be used in the performance of the applicabale test methods and procedures as specified in 4.5.

TABLE III. Test equipment list

ITEM NUMBER	DESCRIPTION
1	Dual Channel Oscilloscope.
2	DC Power Supply (0-15 VDC).
3	Signal Generator (HP 8654B*).
4	Transmitter/Receiver Test Set SK-235-89-001 (See figure 4).
5	Government Furnished SAAB BT22 EM Transmitter (11784700) with RF card removed.
6	UG-273/4 RF to BNC Connector or equivalent.*
7	BNC to Alligator Connector, pomona to Alligator leads or equivalent.*
8	BNC to Minigrabber Connector, pomona to Minigrabber leads or equivalent.*
9	50 OHM Load.
10	Variable electronic filter; SKL 300, KROHN-HITE 3200R, or equivalent.*

*NOTE: The HP 8654B signal generator may not be substituted for: The variable electronic filter must be of the 4 pole type, i.e., it must have a 3dB roll off of 80dB/decade. If the Variable Electronic Filter has pomona jacks, Pomona to alligator leads and pomona to Minigrabber leads may be used. The UG-273/4 may be used with its threads removed if a better connection is desired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection.

4.5.1 Environment. Environment tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 unless otherwise specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus' requirements of MIL-STD-810.

4.5.2 Operating.

4.5.2.1 Low temperature. Test shall be performed as specified in MIL-STD-810, Method 502, Procedure II-Operation. After temperature stabilization for (4) four hours at -25 degrees F, the assembly shall be operationally checked as specified in 4.5.4 to determine compliance with 3.3 and 3.4.

4.5.2.2 High temperature. Test shall be performed as specified in MIL-STD-810, Method 501, Procedure II-Operation. After temperature stabilization for (4) four hours at +125 degrees F, the assembly shall be operationally checked as specified in 4.5.4 to determine compliance with 3.3 and 3.4.

4.5.3 Non-operating.

4.5.3.1 Low temperature. Test shall be performed as specified in MIL-STD-810, Method 502, Procedure I-Storage. After temperature stabilization for (4) four hours at -40 degrees F, the temperature shall be maintained for 4 additional hours. The temperature shall subsequently be returned to ambient and stabilized for (4) four hours. Then the assembly shall be operationally checked as specified in 4.5.4 to determine compliance with 3.3 and 3.4.

4.5.3.2 High temperature. Test shall be performed as specified in MIL-STD-810, Method 501, Procedure I-Storage. After temperature stabilization for (4) four hours at +160 degrees F, the temperature shall be maintained for 4 additional hours. The temperature shall subsequently be returned to ambient and stabilized for (4) four hours. Then the assembly shall be operationally checked as specified in 4.5.4 to determine compliance with 3.3 and 3.4.

4.5.3.3 Vibration. Test shall be performed as specified in MIL-STD-810, Method 514, Basic Transportation, Common Carrier, Vertical axis for one hour of random vibration. After vibration the assembly shall be operationally checked as specified in 4.5.4 to determine compliance with 3.3 and 3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

4.5.3.4 Immersion test. The test shall be performed on the receiver as specified in MIL-STD-810, Method 512. The receiver shall be immersed in water and subjected to a positive pressure equivalent to a three foot head of water for a two hour plus or minus five minutes duration. After completion of the test, the receiver shall meet the requirements of 3.5.4. After the immersion test, the receiver shall be operationally checked as specified in 4.5.4 to determine compliance with 3.3 and 3.4.

4.5.4 Performance Tests.

4.5.4.1 Equipment setup.

a. Assure that all equipment is powered down (off).

b. Connect up all equipment as shown in figure 1 and described in the following steps. Bus 1 and Bus 2 and described in the following steps. Bus 1 and Bus 2 are located on the transmitter logic board as shown on Figure 3. To assure good electrical connections, some coating should be scraped from the bus.

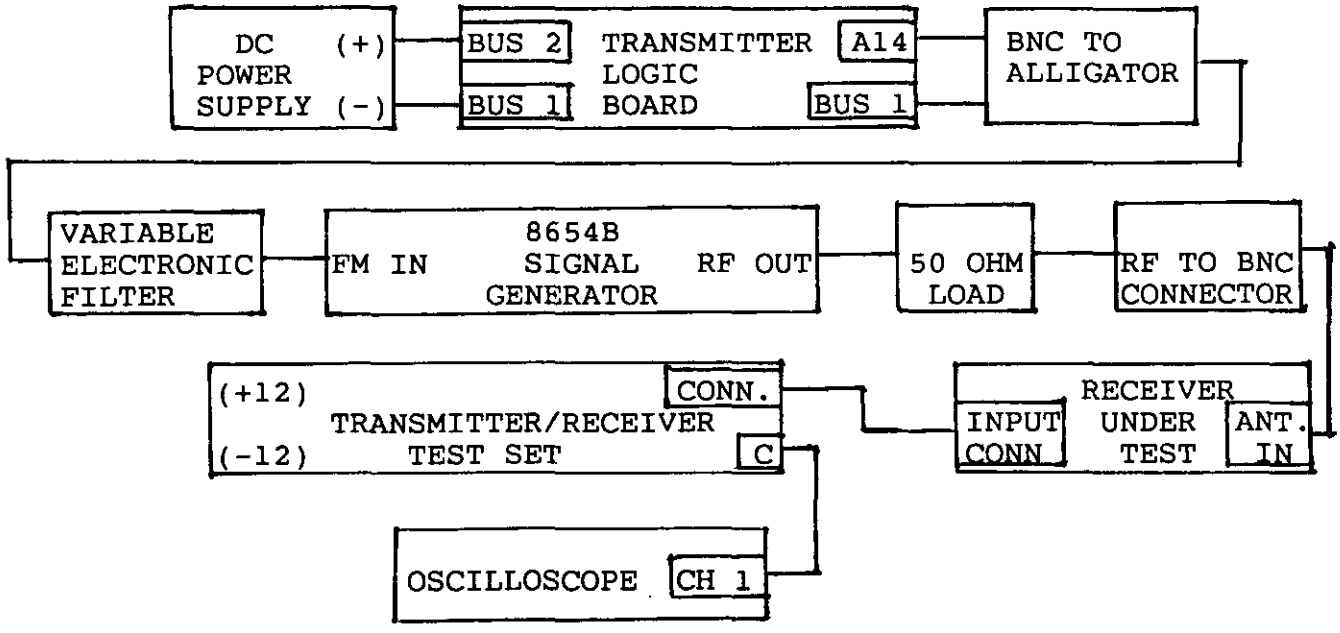


FIGURE 1. Receiver test equipment setup

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

c. Connect the DC power supply NEGATIVE output to bus #1 (The ground bus) of the transmitter logic board.

d. Connect the DC power supply POSITIVE output to bus #2 (+ 12 VDC bus) of the transmitter logic board. The DC power supply output level controls should be at their minimum (0 voltage) positions.

e. Connect the BNC to Minigrabber to a coaxial cable. Connect the BNC end of the cable to the input of the variable electronic filter. Connect the positive Minigrabber to pin A14 on the transmitter logic card and the negative Minigrabber to Bus#1 (The ground bus).

f. Connect a coaxial cable from the low pass output of the Variable Electronic Filter to the signal generator external FM input.

g. Fit the RF to BNC connector over the antenna input connector of the receiver to be tested. Attach a coaxial cable from the RF output of the signal generator to the RF to BNC connector through a 50 ohm load. The signal generator output level should be at its minimum position.

h. Connect a cable from the receiver input connector to the transmitter/receiver test set.

i. Connect the oscilloscope channel one input to connector "C" on the transmitter receiver test set.

j. Power up all test equipment.

k. Adjust the DC power supply for an output of +12.0 volts +/-0.1 Volt. This may require monitoring its output with a voltmeter.

l. Disconnect the coaxial cable from the signal generator external FM input and connect it to channel 2 of the oscilloscope. Press and hold any button. A sinewave of approximately 10-20 volts and 2.3 KHz should be present.

NOTE: The sinewave is changing frequency between 1.95 KHz and 2.6 KHz so a stable display is not possible; however, the voltage amplitude is easily observed.

m. Set the signal generator controls for the following:

FM MODULATION: EXTERNAL (DC)
RF OUTPUT FREQUENCY: RECEIVER FREQUENCY
RF OUTPUT LEVEL: 0.900 mv
PEAK DEVIATION RANGE: 10 KHz

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

Make sure that the signal generator frequency reading is the receiver frequency ± 0.0001 MHz. Reconnect the signal generator FM external input to the coaxial cable. Push any button on the transmitter and hold down. Adjust the signal generator peak deviation sensitivity vernier for a peak deviation of 3 KHz as observed on the meter. It may be necessary to change the peak deviation range to obtain this indication on the meter.

NOTE: Fine tune the RF output for a reading of the exact receiver frequency +/-0.0001 MHz. Care must be taken throughout the rest of this procedure to continually monitor this frequency so that it does not drift from this value.

4.5.4.2 Receiver functional test:

a. Press and hold the hostile fire 1-8 button on the SAAB transmitter. The red HF lamp on the transmitter receiver should glow steadily.

b. Press and hold the down 1-8 button. The green down lamp should glow steadily.

c. Press and hold the up 1-8 button. THe green up lamp should glow steadily.

d. Press and hold the hostile fire button numbered the same as the receiver. The red HF lamp should glow steadily.

e. Press and hold the down button numbered the same as the receiver. The green down lamp should glow steadily.

f. Press and hold the up button numbered the same as the receiver. The green up button should glow steadily.

g. One at a time, press and hold each hostile fire button other than the 1-8 button and the button numbered the same as the receiver. The red HF light must not flow or flicker.

h. One at a time, press and hold each down each button other than the 1-8 button and the button numbered the same as the receiver. The green down light must not glow or flicker.

i. One at a time, press and hold each up button other than the 1-8 button and the button numbered the same as the receiver. The green up light must not glow or flicker.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

4.5.4.3 Receiver battery saver test:

a. Set the oscilloscope as follows:

CHANNEL 1 VOLTS/DIV: 2
COUPLING: AC
TRIGGER MODE: AUTO
SWEEP TIME/DIV: 20 mSEC
HORIZONTAL DISPLAY: A
TRIGGER SOURCE: CH 1

b. Set the signal generator RF output range and level controls for an output of 0.2 uv.

c. The battery saver circuit should now be actuated. When it is functioning correctly the oscilloscope display will be a pulsed noise display with an amplitude of approximately 3-10 volts peak to peak. The "on" time should be approximately 10% of the duty cycle. This display is illustrated in figure 2.

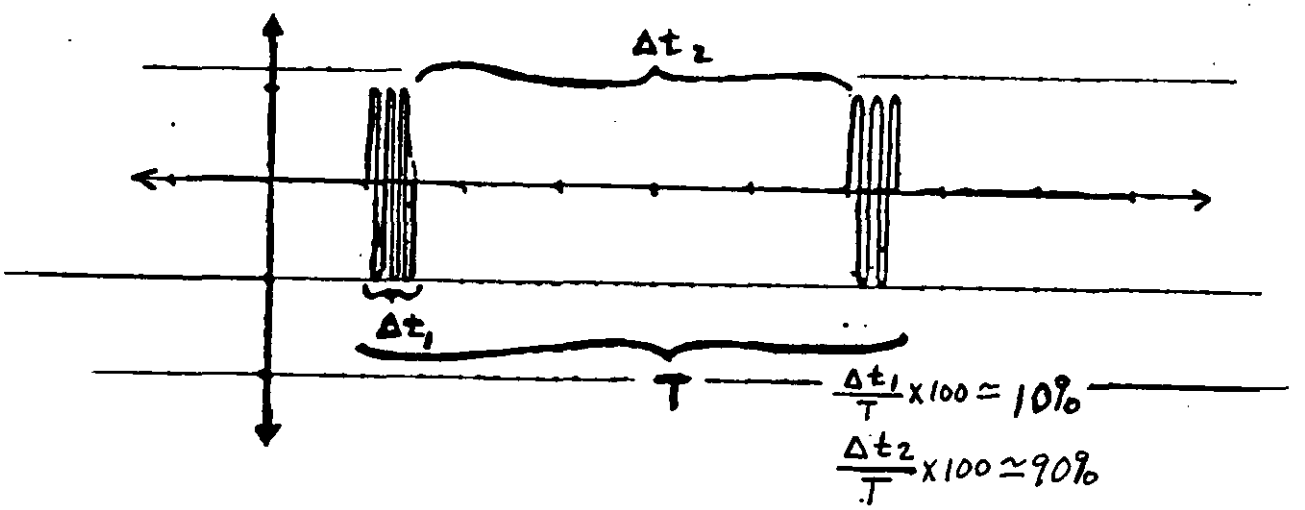


FIGURE 2. Battery Saver Test Display.

d. Now raise the signal generator RF output level to 0.6 uV.

e. The battery saver circuit should now be off. The oscilloscope display should now just be a straight line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

NOTE: If the receiver fails the battery saver tests, the high frequency card adjustment procedure step 10 (economizer adjustment) must be redone. Following this the entire receiver test procedure must be redone.

f. Although the receiver is not required to perform at 0.6 uV, a good receiver will achieve this. This can be observed at this point by repeating steps 4.5.4.2 a-i.

4.5.4.4 Minimum power supply voltage test. Readjust power supply to 11 volts, repeat test procedures 4.5.4.1, 4.5.4.2 and 4.5.4.3 to determine compliance with 3.4h.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

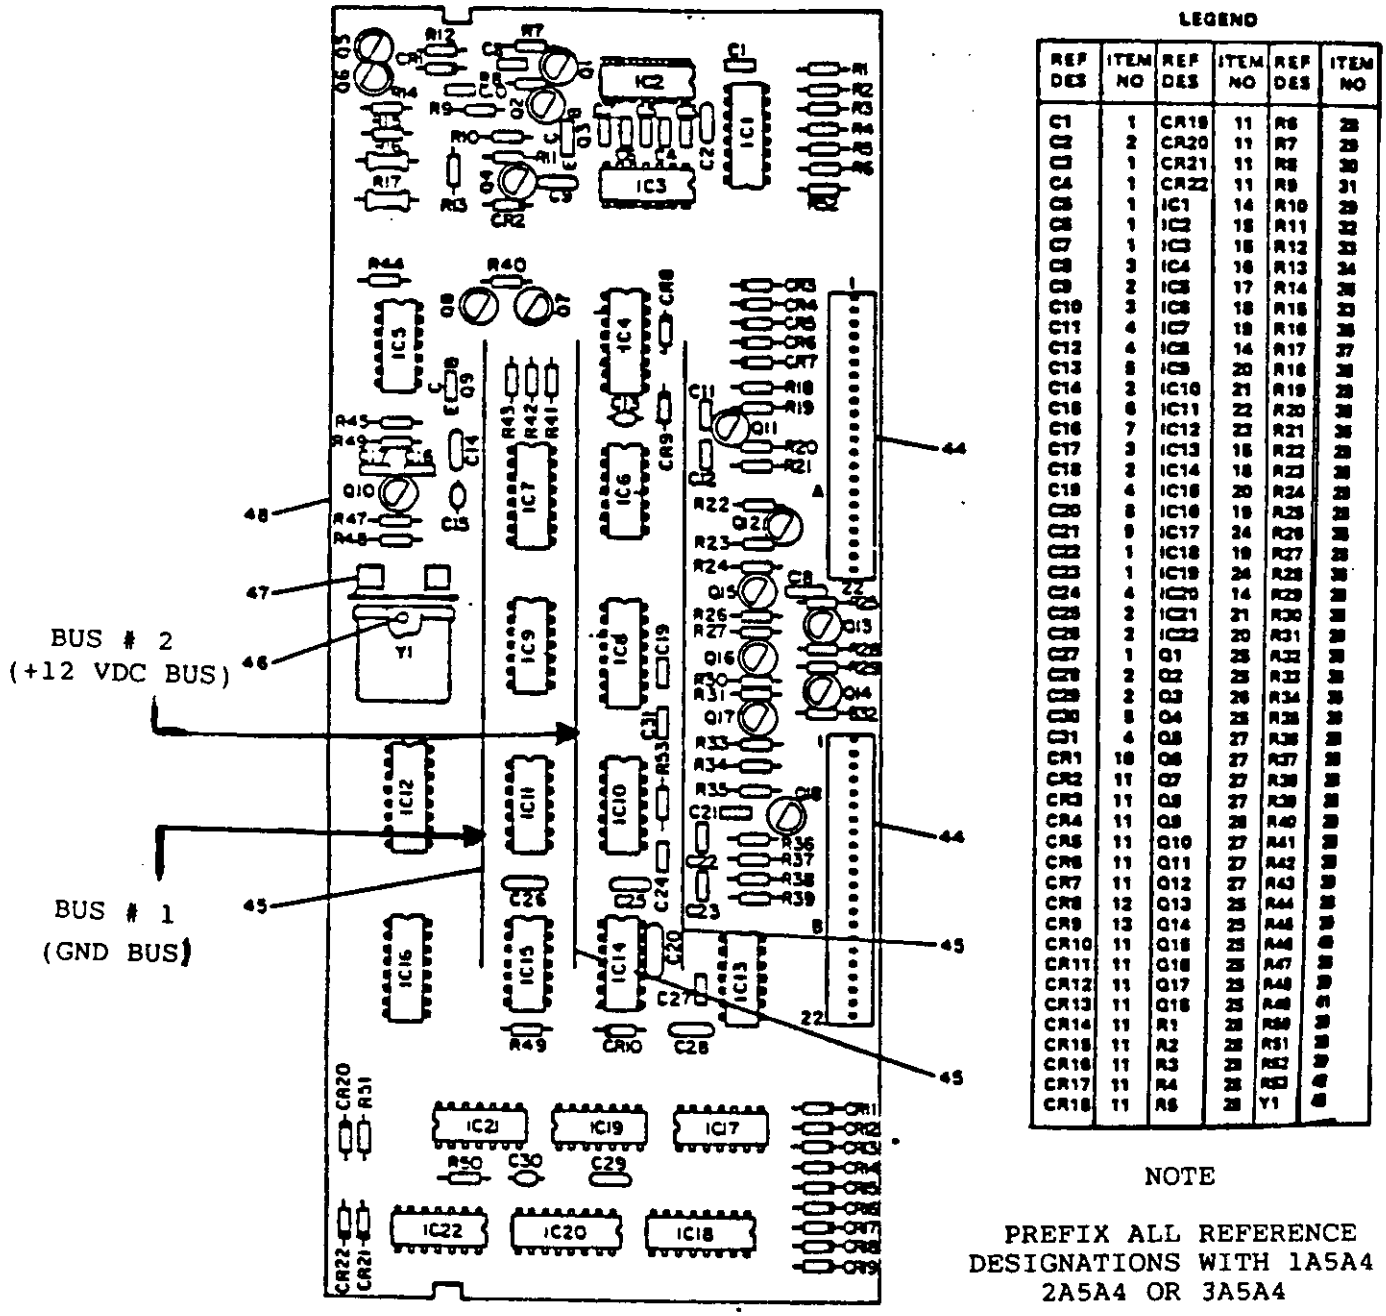


Figure 3. Transmitter logic card bus locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

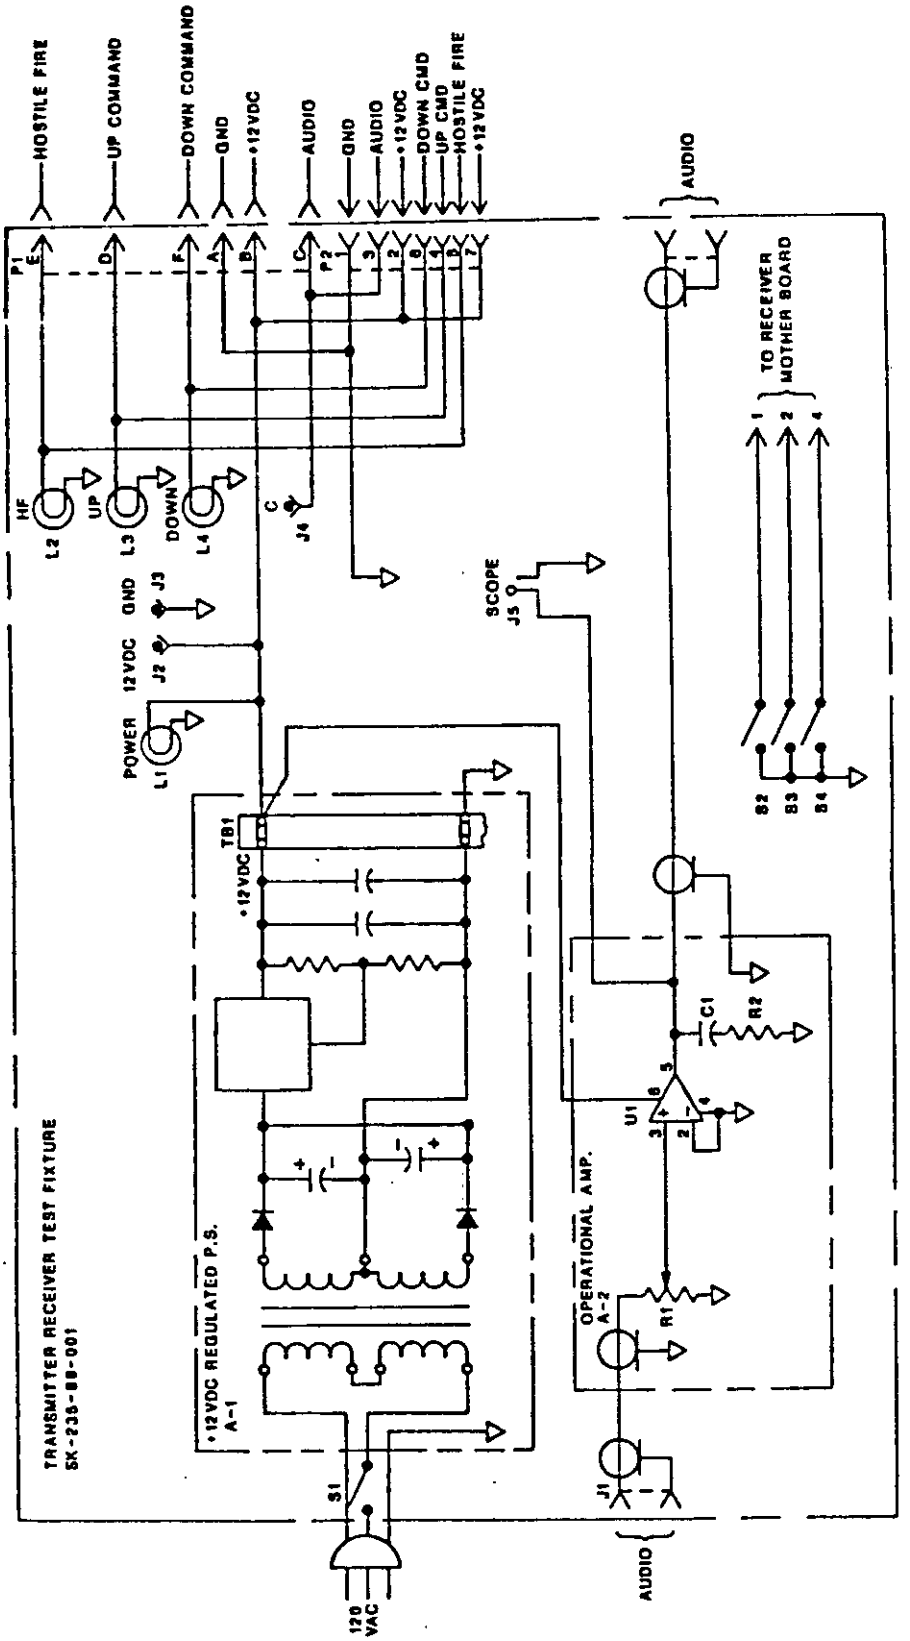


Figure 4:- Transmitter/Receiver Test Fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

TABLE IV. TRANSMITTER/RECEIVER TEST FIXTURE PARTS LIST
SK-235-89-001

ITEM	NOUN	MANUFACTURER*	MODEL/PART	Quantity
A1	Power Supply +12 Vdc	ACOPIAN	R12G200	1
S1	Switch	S.A.	81015AW125V6A	1
S2,S3,S4	Switch		MS24655-211	3
J1	Jack Audio Female	Switchcraft	Z15J	1
J2,J3,J5	Jack Banana Female	Pomona Electronic	1581-0	3
J4	Jack BNC Female	LZR Electronic	CVP-230	1
L1,L2,L3,L4	Lamp	Dialco	249-7970	4
A2	Bread Board	Vector Electronic	59P44-032	1
R1	Resistor 10 Kohm Variance	CTS	5448/10mm	1
U1	IC	Motorola	LM-386N	1
R2	Resistor 10 ohm 1/8 watt	Bradford	5MA3	1
C1	Capacitor .047 Mf50v	Matsuo	553M6302047K	1
P1	Plug		MS3456W16S-1P	1
P2	Plug	AMP	26-4200-16S	1
Wire	20 AGW	Wilson Wire & Cable	20-TE-1934-9	50 ft
Wire	Coaxial	Wilson Wire & Cable	RG196	6 ft
Wire	Bus 20 AGW	Consolidated Wire	3817	1 ft
Screw	Flathead	Southeastern Bolt & Screw	10/32 std.	6
Ties	Plastic Cable	EFI Electronic	95627P-1	50
Post	Standoff	HH Smith	8347	4
Box	Aluminum	LMB	8103	1

*Equivalent parts may be substituted. This does not guarantee availablity or continued supply of these items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

4.6 Soldering. Soldering process shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified in 3.7.

5. PACKAGING

5.1 General. Preservation, packaging, packing and marking shall be in accordance with special packaging instructions P11784801.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This specification details the specific requirements for performance, quality assurance, and testing of the Channel X Receiver. The receiver is used in conjunction with a portable transmitter to operate the Target Holding Mechanism/Tank Gunnery (THM/TG) which will support live fire armor weapons training targets for basic troop qualification programs on the Remote Target System (RETS).

6.2 Acquisition requirements. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.

b. Group code and receiver frequency.

c. Quantity required and delivery schedules.

d. Place of inspection, if not at place of manufacture.

e. Instructions for shipment of production lot samples.

f. Provision for preparation for delivery, if required for indefinite storage of inter-plant shipment.

g. Provisions for the supply, maintenance and disposition of test equipment for acceptance inspection process.

h. Procuring activity designation assembly number (s) and nomenclature (s).

i. Serialization requirement, if applicable.

j. Packaging requirements, if other than specified in Section 5.

k. Certificate of conformance for each lot or shipment of product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF-I (D), Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament, Research and Development Command (ARRADCOM), Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

6.5 Definitions.

6.5.1 Trainers. Training device terms are defined in MIL-HDBK-220. Other definitions, if required, will be furnished upon written request to the Procuring Contracting Officer.

6.5.2 Contractor. Unless otherwise specified, the word Contractor used throughout this specification shall mean any supplier or producer of items or material to the Government. This shall include commercial contractors, sub-contractors, Government Owned-Contractor Operated (GOCO), and Government Owned-Government Operated (GOGO) plants.

6.5.3 Technical data package. A technical description of an item adequate for use in procurement. The description defines the required design configuration and assures adequacy of item performance. It consists of all applicable technical data such as plans, drawings, and associated lists, specifications, standards, models, performance requirements, quality assurance provisions and packaging data.

6.6 Subject term (keyword) listing

a. Target Holding Mechanism/Tank Gunnery (THM/TG)
b. Gunfire Simulator (GUFS)
c. Transmitter Assembly (Transmitter)
d. Visual Hit Indicator Lamp (VHIL)
e. Remote Target System (RETS)

6.7 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 5895-A423)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-R-70834A (AR)	22 March 1991

3. DOCUMENT TITLE

RECEIVER, CHANNEL X: 11784801

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6662	(2) AUTOVON 880-6662
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:09Z
Check the source to verify that this is the current version before use.