MIL-STD-35-1OC (MI)

27 September 1985

SUPERSEDING
MIL-STD-35-1OB(MI)
28 JULY 1972

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FUSES

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

AREA-EDS

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE ; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Fuses
Automated Engineering
Document Preparation System

MIL-STD-35-10C(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-EDC, Redstone Arsenal, Alabama 35898, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-10C (MI) is to provide instructions for the preparation of Specifications Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Fuses.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedure described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	4
	2.1	Issues of documents	4
	2.2	Other publications	5
	3.	DEFINITIONS	6
	3.1	DOD-STD-35 definitions	6
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Introduction	8
	5.2	MSE Formats	8
	5.3	Referenced documents	8
	5.4	Tabulation	8
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	1.	Title Index	2
	11.	Tabulation Candidates	9

APPENDICES

Appendix	A.	Illustrations	108
	B.	Characteristic Code Index	121
		Index	126

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Fuses.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on a SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Table I TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
FUSE, CARTRIDGE TYPE, NONRENEWABLE	027015	W-F-1726	CARTRIDGE TYPE NONRENEWABLE
FUSE, CARTRIDGE, HIGH INTERRUPTING CAPACITY (NONCURRENT-LIMITING)	027016	W-F-1814	CARTRIDGE HIGH INTERRUPTING CAPACITY
FUSE, CURRENT LIMITER TYPE AIRCRAFT	027014	MIL-F-5372	CURRENT LIMITING AIRCRAFT
FUSE, INDICATING, CARTRIDGE, FERRULE	027001	MIL-F-15160	INDICATING, FERRULE CARTDGE
FUSE, INDICATING RECTANGULAR LINK, SPADE LUG	027002	MIL-F-15160	RECTANGULAR LINK, SPADE LUG INDICATING
FUSE, INDICATING, SINGLE-ENDED, PIN	027003	MIL-F-15160	PIN SINGLE-END INDICATING
FUSE, NONINDICATING, AXIAL SPADE LUG	027004	MIL-F-15160	AXIAL SPADE LUG NONINDICATING
FUSE, NONINDICATING, CARTRIDGE, FERRULE	027005	MIL-F-15160	CARTRIDGE FERUL NONINDICATING
FUSE, NONINDICATING, CARTRIDGE, WIRE LEAD	027006	MIL-F-23419	WIRE LEAD CARTRIDGE NONINDICATING

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE I TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
FUSE, NONINDICATING, CARTRIDGE, FERRULE	027012	MIL-F-23419	CARTRIDGE FERUL NONINDICATING
FUSE, NONINDICATING, KNIFE BLADE	027007	MIL-F-15160	KNIFE BLADE NONINDICATING
FUSE, NONINDICATING, KNIFE BLADE, TERMINAL SCREW	027008	MIL-F-15160	KNIFE BLADE SCREW TERMINAL NONINDICATING
FUSE, NONINDICATING, OFFSET SPADE LUG	027009	MIL-F-15160	OFFSET SPADE LUG NONINDICATING
FUSE, NONINDICATING, SINGLE-ENDED PIN	02701@	MIL-F-23419	PIN, SINGLE-END NONINDICATING
FUSE, NORMAL BLOWING	027015	MIL-F-48844	NORMAL BLOWING
FUSE, PLUG	027011	W-F-791	PLUG TYPE
FUSE, TIME-LAG BLOWING	027018	MIL-F-48844	TIME-LAG BLOWING
FUSE, UNIVERSAL LINK (H .V.), OPEN AND ENCLOSED TYPE	027013	MIL-F-18915	UNIVERSAL LINK OPEN AND CLOSE

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base-document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

W-F-791	Fuse Plug (General Specification)
W-F-1726	Fuse, Cartridge, Class H (General Specification)
W-F-1814	Fuse, Cartridge, High Interrupting Capacity (General Specification)

MILITARY

MIL-F-5372	Fuse, Current Limiter Type, Aircraft
MIL-F-15160	Fuse, Instrument, Power and Telephone
MIL-F-18915	Fuse, Universal Link (H.V.) Open and Closed Type
MIL-F-23419	Fuse, Instrument Type General Specification for
MIL-F-48844	Fuse, Normal, and Time-Lag Blowing

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

OTHER PUBLICATIONS

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 DOD-STD-35 definitions. Definitions contained in DOD-STD-35 are applicable to Fuses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Fuses, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specifications Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Fuses.

4.3 Configuration.

4.3.1 Dimmensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Fuses.

4.3.2 Illustration. Illustrations applicable to Fuses are contained in Appendix A to this document.

4.4 Units of measure. The international System of Units (S1) or inch-pound units (U.S.), may be used to specify characteristics (e.g., weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2, of the forthcoming MSE, are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column heading which may be used for Fuse characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units “may be tabulated; e.g. either inches or millimeters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7597	CURRENT RATING AMPERES	7598	CURRENT RATING MILLIAMPS	7619	VOLTAGE RATING (VOLTS DC)
7618	VOLTAGE RATING (VOLTS AC)	7021	MASS GRAMS	7022	WEIGHT OUNCES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 wher. exceptions are required to Quality Assurance Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code(s) is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked, by data base logic, to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUlLDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER FSCM	1004
*CONTRACT NUMBER\OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER FSCM 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(s).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER (S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BLOW RATE (SELECT ONE)	
QUICK .	1592
NORMAL .	1595
SLOW.	1596
CURRENT RATING	
MINIMUM CURRENT (SELECT ONE)	
(AMPERES)	7591
(MILLIAMPERES)	7592
MAXIMUM CURRENT (SELECT ONE)	
(AMPERES)	7594
(MILLIAMPERES)	7595
NOMINAL CURRENT (SELECT ONE)	
(AMPERES)	7597
(MILLIAMPERES)	7598
VOLTAGE RATING	
(VOLTS AC)	7618
(VOLTS DC)	7619

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1592	BLOW RATE. THE FUSE BLOW RATE SHALL BE QUICK.
1595	BLOW RATE. THE FUSE BLOW RATE SHALL BE NORMAL.
1596	BLOW RATE. THE FUSE BLOW RATE SHALL BE SLOW.
	CURRENT RATING.
7591	THE MINIMUM CURRENT RATING SHALL BE 7591 AMPERE(S).
7592	THE MINIMUM CURRENT RATING SHALL BE 7592 MILLIAMPERE(S).
7594	THE MAXIMUM CURRENT RATING SHALL BE 7594 AMPERE(S).
7595	THE MAXIMUM CURRENT RATING SHALL BE 7595 MILLIAMPERE(S).
7597	THE NOMINAL CURRENT RATING SHALL BE 7597 AMPERE(S).
7598	THE NOMINAL CURRENT RATING SHALL BE 7598 MILLIAMPERE(S).
	VOLTAGE RATING.
7618	THE NOMINAL VOLTAGE RATING SHALL BE 7618 VOLT(S) AC.
7619	THE NOMINAL VOLTAGE RATING SHALL BE 7619 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY RATING (SELECT ONE)	
(HERTZ)	7627
(MEGAHERTZ)	7628
(KILOHERTZ)	7641
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	FREQUENCY RATING.
7627	THE FREQUENCY RATING SHALL BE 7627 HERTZ.
7628	THE FREQUENCY RATING SHALL BE 7628 MEGAHERTZ.
7641	THE FREQUENCY RATING SHALL BE 7641 KILOHERTZ.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATIION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MTERIALS (SEE TABLE VI, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE VI IS USED.	
FINISHES (SEE TABLE VII, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE VII IS USED.	
DESIGN AND CONSTRUCTION	
ENCLOSURE (SELECT ONE)	
HERMETICALLY SEALED.	1636
OPEN.	1637
DUSTPROOF.	1638
EXPLOSION PROOF.	1639
CLOSED.	1640
MOISTURE PROOF.	1641
FERRUL ALIGNMENT (SELECT ONE)	
(INCH)	1576

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

DESIGN AND CONSTRUCTION.

1636 ENCLOSURE. THE FUSE ENCLOSURE TYPE SHALL BE HERMETICALLY SEALED.

1637 ENCLOSURE. THE FUSE ENCLOSURE TYPE SHALL BE OPEN.

1638 ENCLOSURE. THE FUSE ENCLOSURE TYPE SHALL BE DUSTPROOF.

1639 ENCLOSURE. THE FUSE ENCLOSURE TYPE SHALL BE EXPLOSION PROOF.

1640 ENCLOSURE. THE FUSE ENCLOSURE TYPE SHALL BE CLOSED.

1641 ENCLOSURE. THE FUSE ENCLOSURE TYPE SHALL BE MOISTURE PROOF.

1576 FERRULE ALLIGNMENT. FUSES WITH FERRULE TERMINALS SHALL PASS THROUGH A TUBULAR GAGE HAVING AN INTERNAL DIAMETER OF 1576 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(MILLIMETERS)	1577
STYLE (SELECT ONE)	
CARTRIDGE NONRENEWABLE.	1570
CARTRIDGE RENEWABLE.	1572
CARTRIDGE MINIATURE.	1574
CARTRIDGE MINIATURE INDICATING.	1575
PICOFUSE.	1560
PIGTAIL MICROFUSE.	1581
PLUG-IN MICROFUSE.	1584
PLUG, EDISON BASE.	1587
PLUG, TAMPER-PROOF.	1591
WEIGHT/MASS (SELECT ONE)	
U.S.	
(OUNCES)	7022
SI	
(GRAMS)	7021

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1577 FERRULE ALLIGNMENT. FUSES WITH FERRULE TERMINALS SHALL PASS THROUGH A TUBULAR GAGE HAVING AN INTERNAL DIAMETER OF 1577 MILLIMETER(S).

1570 STYLE. THE FUSE STYLE SHALL BE A CARTRIDGE (NONRENEWABLE).

1572 STYLE. THE FUSE STYLE SHALL BE A CARTRIDGE (RENEWABLE).

1574 STYLE. THE FUSE STYLE SHALL BE A CARTRIDGE, MINIATURE.

1575 STYLE. THE FUSE STYLE SHALL BE A CARTRIDGE, MINIATURE (INDICATING) .

1580 STYLE. THE FUSE STYLE SHALL BE A PICOFUSE.

1581 STYLE. THE FUSE STYLE SHALL BE A PIGTAIL MICROFUSE.

1584 STYLE. THE FUSE STYLE SHALL BE A PLUG-IN MICROFUSE.

1587 STYLE. THE FUSE STYLE SHALL BE A PLUG (EDISON BASE).

1591 STYLE. THE FUSE STYLE SHALL BE A PLUG (TAMPER-PROOF).

7022 MAXIMUN WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7021 MAXIMUN MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT CARRYING CAPACITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT —	1612
NO EVIDENCE OF MECHANICAL DAMAGE OR ELECTRICAL FAILURE.	1613
CASE TEMPERATURE RISE (DEGREES CELSIUS)	1616
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT —	1602
PER CURRENT CARRYING CAPACITY TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1612 CURRENT CARRYING CAPACITY. THE REQUIREMENT(s) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1612.

1613 CURRENT CARRYING CAPACITY. THE FUSES SHOW NO EVIDENCE OF MECHANICAL DAMAGE AND SHALL CARRY THE CURRENT WITHOUT ELECTRICAL FAILURE.

1616 THE TEMPERATURE OF THE FUSE CASE OR BODY AND THE TERMINALS SHALL RISE NOT MORE THAN 1616 DEGREES CELSIUS ABOVE THE AMBIENT TEMPERATURE.

1602 CURRENT CARRYING CAPACITY TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1602.

CURRENT CARRYING CAPACITY. DIVIDE THE SAMPLE UNITS INTO AS MANY EQUAL GROUPS AS THERE ARE TEST TEMPERATURES ENTERED IN THE CURRENT CARRYING CAPACITY TABLE. EACH FUSE SHALL BE MOUNTED IN A FUSEHOLDER. WHEN TWO OR MORE FUSES ARE TESTED IN SERIES, THE FUSEHOLDER SHALL BE LOCATED SO THAT THERE SHALL BE A SPACING OF NOT MORE THAN ONE INCH BETWEEN ANY TWO FUSES UNDER TEST. THE TEST SHALL BE AS SPECIFIED IN THE FOLLOWING CURRENT CARRYING CAPACITY TABLE:

CURRENT CARRYING CAPACITY TABLE

TEST TEMPERATURE (DEG. C)	TEMPERATURE TOLERANCE PLUS (+) DEG. C	TEMPERATURE TOLERANCE MINUS (-) DEG. C	PERCENT OF RATED CURRENT
1730	1731	1732	1733
1734	1735	1736	1737
1738	1739	1740	1741
1742	1743	1744	1745
1746	1747	1748	1749
1750	1751	1752	1753

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	1604
TEST DURATION (SELECT ONE)	
(MINUTES)	1605
(HOURS)	1607
POWER SUPPLY OPEN CIRCUIT (SELECT ONE)	
(VOLTS DC)	1618
(VOLTS AC)	1627
TEST FREQUENCY (HERTZ)	1642
TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	1644
TEST FREQUENCY	1645
(VOLTS DC)	1643
TEST TEMPERATURE (DEGREES CELSIUS)	1617
TEST CURRENT (AMPERES)	1615

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1604	CURRENT CARRYING CAPACITY. THE CURRENT SHALL BE MAINTAINED UNTIL THE TEMPERATURE HAS STABILIZED WITHIN + OR - 2 DEGREES C FOR 3 CONSECUTIVE READINGS SPACED 5 MINUTES APART. THE TEMPERATURE OF THE FUSE CASE OR BODY AND TEST TERMINALS SHALL BE MEASURED BY THERMOCOUPLES (WIRE SIZE 30 AWG). EACH FUSE SHALL BE MOUNTED IN A FUSEHOLDER. WHEN 2 OR MORE FUSES ARE TESTED IN SERIES, THE FUSEHOLDER SHALL BE LOCATED SO THAT THERE WILL BE A SPACING OF NOT MORE THAN 1-INCH BETWEEN ANY TWO FUSES UNDER TEST.
1605	THE DURATION OF THE TEST APPLICATION SHALL BE 1605. MINUTE(S).
1607	THE DURATION OF THE TEST APPLICATION SHALL BE 1607 HOUR(S).
1618	THE OPEN CIRCUIT POWER SUPPLY VOLTAGE SHALL BE NOT LESS THAN 1618 VOLT(S) DC.
1627	THE OPEN CIRCUIT POWER SUPPLY VOLTAGE SHALL BE NOT LESS THAN 1627 VOLT(S) AC.
1642	THE TEST FREQUENCY SHALL BE 1642 HERTZ.
1644	TEST VOLTAGE SHALL BE 1644 VOLT(S) AC.
1645	THE TEST FREQUENCY SHALL BE 1645 HERTZ.
1643	TEST VOLTAGE SHALL BE 1643 VOLT(S) DC.
1617	TEST TEMPERATURE SHALL BE 1617 DEGREES CELSIUS.
1615	TEST CURRENT SHALL BE 1615 AMPERE(S) .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DC RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1681
RESISTANCE MAXIMUM (OHMS)	1682
RESISTANCE MINIMUM (OHMS)	1683
TEMPERATURE RISE (DEGREES CELSIUS)	1684
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1673
PER MIL-STD-202, METHOD 303.	1672
DURATION (SECONDS)	1675
TEST VOLTAGE (VOLTS)	1677
TEST TEMPERATURE (DEGREES CELSIUS)	1678
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	4908

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1681	DC RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1681.
1682	DC RESISTANCE. THE MAXIMUM RESISTANCE SHALL BE NOT GREATER THAN 1682 OHM(S).
1683	DC RESISTANCE. THE MINIMUM RESISTANCE SHALL BE NOT LESS THAN 1683 OHM(S).
1684	THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 1684 DEGREES CELSIUS.
1673	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1673.
1672	DC RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 303 OF MIL-STD-202.
1675	THE DURATION OF THE TEST VOLTAGE APPLICATION SHALL BE 1675 SECOND(S).
1677	VOLTAGE SHALL BE 1677 VOLT(S).
1678	TEST TEMPERATURE SHALL BE 1678 DEGREES CELSIUS.
4908	DIELETRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
RESISTANCE CHANGE MAXIMUM (PERCENT)	3102
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDWON.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3102	RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3102 PERCENT.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE @VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MEASUREMENTS AND' TESTS (DES)	3129
MEASUREMENTS AFTER TEST (DES)	3130
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
3129	MEASUREMENT(S) AND TEST(S) DURING SUBJECTION TO REDUCED PRESSURE SHALL BE 3129.
3130	MEASUREMENT(S) AFTER TEST SHALL BE 3130.
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
RESISTANCE CHANGE MAXIMUM (PERCENT)	3103
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS , DC)	4854
(VOLTS , AC)	4855
POINTS OF VOLTAGE APPLICATION:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3103	RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3103 PERCENT.
4861	DIELETRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
MEASUREMENT AFTER TEST (DES)	3131

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

4844 BETWEEN MUTUALLY INSULATED PARTS.

4845 BETWEEN ALL INSULATED PARTS AND GROUND.

4846 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4850 SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.

4867 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

5000 MOUNTING SHALL BE IN ACCORDANCE WITH 5000.

4869 REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.

4870 THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S) .

4717 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).

4897 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).

6267 METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

3131 MEASUREMENT(S) AFTER TEST SHALL BE 3l31.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1713
NO Explosion	1712
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1701
PER MIL-STD-202, METHOD 109.	1702
TEST CHAMBER TEMPERATURE (DEGREES CELSIUS)	1703
EXPLOSIVE MIXTURE (DES)	1704
TEST CURRENT (AMPERES)	1705
TEST FREQUENCY (HERTZ)	1708
TEST VOLTAGE (VOLTS)	1706
DURATION OF CURRENT (SECONDS)	1709
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	4760

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PHARAGRAPH

1713 EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1713.

1712 EXPLOSION. THERE SHALL BE NO EXPLOSION.

1701 EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1701.

1702 EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 109 OF MIL-STD-202.

1703 TEST CHAMBER TEMPERATURE SHALL BE 1703 DEGREES CELSIUS.

1704 THE EXPLOSIVE MIXTURE SHALL BE 1704.

1705 TEST CURRENT SHALL BE 1705 AMPERE(S).

1708 THE TEST FREQUENCY SHALL BE 1708 HERTZ.

1706 TEST VOLTAGE SHALL BE 1706 VOLT(S).

1709 THE DURATION OF THE CURRENT APPLICATION SHALL BE 1709 SECOND(S).

4760 FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4761 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4762 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4754 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.

4756 TEST PERIOD SHALL BE 4756 DAY(S).

4798 HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.

4799 HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

4815 THERE SHALL BE NO DEGRADATION OF PERFORMANCE.

4791 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
RESISTANCE CHANGE MAXIMUM (PERCENT)	3105
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
3105	RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3105 PERCENT.
4788	HUMIDITY TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S) .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
FINAL MEASUREMENTS AFTER TEST (DES)	3132
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
RESISTANCE CHANGE MAXIMUM (PERCENT)	3106

)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
3132	FINAL MEASUREMENT(S) AFTER DRYING PERIOD SHALL BE 3122.
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S) .
3106	RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3106 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT (S) SHALL BE MADE WITHIN 4812 HOUR (S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL NOT BE MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1380	INSULATION RESISTANCE. THE REQUIREMENT (S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT (S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S) .
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
RESISTANCE CHANGE MAXIMUM (PERCENT)	3107
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1387 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.

1388 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1407 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

3107 RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3107 PERCENT.

1371 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

1511 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

1378 TEST CONDITION LETTER 1378 SHALL APPLY.

1373 TEST POTENTIAL SHALL BE 1373 VOLTS, DC.

1376 ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

1377 THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:

1497 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

1498 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT (S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
RESISTANCE CHANGE MAXIMUM (PERCENT)	3108
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE SATANDARD PARAGRAPH

1432 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.

1406 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.

3108 RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3108 PERCENT.

1391 MOISTURE RESISTANCE TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.

1397 MOISTURE RESISTANCE TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.

1395 POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.

4981 LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.

4980 LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.

4991 4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.

4985 STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.

4986 STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.

1449 MOUNTING SHALL BE IN ACCORDANCE WITH 1449.

4983 PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
INITIAL MEASUREMENTS CONDITIONS (DES)	3133
INITIAL MEASUREMENTS (DES)	3134
FINAL MEASUREMENTS (DES)	3135
OVERLOAD INTERRUPT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1623
NO MECHANICAL FAILURE WITHIN LIMITS.	1626
NO FAILURE OF BODY OR CASE.	1630
CIRCUIT RECLOSE MINIMUM (MINUTES)	1631
TEMPERATURE (DEGREES CELSIUS)	1632
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1621

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
3133	CONDITIONS FOR INITIAL MEASUREMENT(S) SHALL BE 3133.
3134	INITIAL MEASUREMENT SHALL BE 3134.
3135	FINAL MEASUREMENT(S) SHALL BE 3135.
1623	OVERLOAD INTERRUPT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1623.
1626	OVERLOAD INTERRUPT. THE FUSES SHALL OPEN THE CIRCUIT WITHIN THE TIME LIMITS, THERE SHALL BE NO MECHANICAL FAILURES NOR CHARRING, FRACTURING OR DEGRADATION OF THE BODY OR CASE. THE CIRCUIT SHALL REMAIN OPEN WITHOUT THE CIRCUIT CLOSING AGAIN DURING A 5-MINUTE PERIOD AFTER INTERRUPT.
1630	OVERLOAD INTERRUPT. THERE SHALL BE NO MECHANICAL FAILURES NOR CHARRING, FRACTURING OR DEGRADATION OF THE FUSE BODY OR CASE.
1631	CIRCUIT SHALL NOT RECLOSE IN LESS THAN 1631 MINUTE(S).
1632	THE TEMPERATURE OF THE FUSE CASE OR BODY AND THE TERMINALS SHALL RISE NOT MORE THAN 1632 DEGREES CELSIUS ABOVE THE AMBIENT TEMPERATURE.
1621	OVERLOAD INTERRUPT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1621.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARATERISTIC NAME	CHAR CODE
PER OVERLOAD INTERRUPT TABLE	
AS FOLLOWS:	1622
DURATION OF TEST (SELECT ONE)	
(MINUTES)	1619
(HOURS)	1620
SOAK TIME (MINUTES)	1625
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	1649
(VOLTS, AC)	1664
FREQUENCY (HERTZ)	1665

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

OVERLOAD INTERRUPT. DIVIDE THE SAMPLE UNITS INTO AS MANY EQUAL GROUPS AS THERE ARE TEST TEMPERATURES ENTERED IN THE OVERLOAD INTERRUPT TABLE. THE TEST TEMPERATURE, TEMPERATURE TOLERANCE, PERCENT OF RATED CURRENT AND BLOW TIME SHALL BE AS SPECIFIED IN THE FOLLOWING OVERLOAD INTERRUPT TABLE:

OVERLOAD INTERRUPT TABLE

TEST TEMPERATURE	TEMPERATURE TOLERANCE PLUS DEG. C)	TEMPERATURE TOLERANCE MINUS (DEG. C)	PERCENT OF RATED CURRENT	BLOW TIME MINIMUM	BLOW TIME MAXIMUM
1760	1761	1762	1763	1764	1765
1766	1767	1768	1769	1770	1771
1772	1773	1774	1775	1776	1777
1778	1779	1780	1781	1782	1783
1784	1785	1786	1787	1788	1789
1790	1791	1792	1793	1794	1795

1622 OVERLOAD INTERRUPT. THE NUMBER OF FUSES TO BE TESTED SHALL BE EVENLY DIVIDED FOR THE VARIOUS OVERLOADS.

1619 THE DURATION OF THE TEST APPLICATION SHALL BE 1619 MINUTE(S).

1620 THE DURATION OF THE TEST APPLICATION SHALL BE 1620 HOUR(S).

1625 THE SOAK TIME FOR FUSES PRIOR TO TEST CURRRENT APPLICATION SHALL BE 1625 MINUTE(S) AT TEST TEMPERATURE.

1649 TEST VOLTAGE SHALL BE 1649 VOLT(S) DC.

1664 TEST VOLTAGE SHALL BE 1664 VOLT(S) AC.

1665 THE TEST FREQUENCY SHALL BE 1665 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED.	4858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6291 RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.

6371 RADIOGRAPHIC. THE EXAMINATION OF THE IDIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).

4857 NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS. .

4858 NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.

6282 RADIOGRAPHIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.

4843 RADIOGRAPHIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.

6286 THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(INCHES)	6285
VIEWING EQUIPMENT (IDENTIFY) ____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) ____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283
(MILLIMETERS)	5297
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6929

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6285 THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCH(S).

6287 THE VIEWING EQUIPMENT SHALL BE 6287.

6288 THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.

6289 THE DEFECTS TO BE SOUGHT SHALL BE 6289.

6284 NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.

6283 TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

5297 TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

6929 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
REMAIN WITHIN SPECIFIED TOLERANCE.	6937
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0.5 HOURS OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6930 RELIABILLITY SCREENING (BURN-IN), AGENING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

6937 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

6696 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.

6697 RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.

6698 TEST CONDITION LETTER 6698 SHALL APPLY.

6699 DURATION OF THE TEST SHALL BE 6699 HOUR(S).

6710 DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.

6713 DUTY CYCLE SHALL BE STEADY STATE.

6700 TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.

6701 TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.

6923 TEST CHAMBER SHALL HAVE STILL AIR.

6921 ITEM(S) SHALL BE TESTED AT 692l TIMES THE RATED POWER.

6939 APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707
ELECTRICAL LOAD (OHMS)	6920
MEASUREMENT INTERVALS (HOURS)	6922
MOUNT PER DOCUMENT (DOC DES)	6924
RATED CURRENT (PERCENT)	3128
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
RESISTANCE CHANGE MAXIMUM (PERCENT)	3109
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6706	TEST POTENTIAL SHALL BE 6706 VOLTS, AC.
6707	TEST POTENTIAL SHALL BE 6707 VOLTS, DC.
6920	THE ELECTRICAL LOAD SHALL BE 6920 OHMS.
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST.
6924	MOUNTING SHALL BE IN ACCORDANCE WITH 6924.
3128	THE CURRENT SHALL BE 3128 PERCENT OF RATED CURRENT.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3109	RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3109 PERCENT.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
4878	SALT SPAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR. DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
MEASUREMENTS AFTER EXPOSURE (DES)	3136
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION.	4959
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMEN(S) SHALL BE OPERATED DURING TEST STEP(S) (NUMBER)	4872
*DURAT1ON OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

4765 MOUNTING SHALL BE BY THE NORMAL METHOD.

4766 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

3136 MEASUREMENT(S) AFTER EXPOSURE SHALL BE 3136.

4958 SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.

4959 SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.

4952 SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.

4960 SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.

4872 ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.

6299 DURATION OF OPERATION SHALL BE 6299 HOUR(S) .

1539 ORIENTATION SHALL BE CHANGED DURING THE TEST.

4956 THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4745 SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.

6370 SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

4746 THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.

4748 THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.

4734 SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT, 4734.

4732 SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.

4737 TEST CONDITION LETTER A SHALL APPLY.

4738 LIQUID FOR BUBBLE TEST BATH SHALL BE 4738.

4739 TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.

6320 TEST CONDITION LETTER B SHALL APPLY.

6321 LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.

6322 TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4746 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION OF LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LETTER D.	6331
ANY SUITABLE MOUNTING METHOD.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING METHOD.	6333
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
NO DISCONTINUITY DURING TEST.	1451
CONTINUITY BREAK MAXIMUM (MICROSECONDS)	3110
RESISTANCE CHANGE MAXIMUM (PERCENT)	3111
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6331 TEST CONDITION LETTER D SHALL APPLY.

4743 MOUNTING SHALL BE ANY SUITABLE METHOD.

6332 TEST CONDITION LETTER E SHALL APPLY.

6333 MOUNTING SHALL BE ANY SUITABLE METHOD.

1494 SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

1495 SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1464 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1451 THERE SHALL BE NO DISCONTINUITY DURING THE TEST.

3110 BREAK IN CONTINUITY DURING TESTING SHALL BE NOT GREATER THAN 3110 MICROSECOND(S) .

3111 RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3111 PERCENT.

1486 SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE EASE DOCUMENT, EXCEPT 1486.

1482 SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
MONITORING DURING TEST (DES)	3137
MEASUREMENTS AFTER TEST (DES)	3138
RATED LOAD APPLIED (PERCENT)	6203
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
CONTINUITY BREAK MAXIMUM (MICROSECONDS)	3112
RESISTANCE CHANGE MAXIMUM (PERCENT)	3113

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1488 THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.

1478 THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.

1468 THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.

3137 MONITORING DURING TEST SHALL BE 3137.

3138 MEASUREMENT(S) AFTER TEST SHALL 3138.

6203 THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.

1508 SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.

1509 SHOCK SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1471 THERE SHALL BE NO DISCONTINUITY DURING THE TEST.

4703 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

3112 BREAK IN CONTINUITY DURING TESTING SHALL BE NOT GREATER THAN 3112 MICROSECOND(S).

3113 RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3113 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
RATED LOAD APPLIED (PERCENT)	6204
MEASUREMENTS (DES)	3139
SHORT CIRCUIT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1694
CIRCUIT OPEN DURING OF TEST.	1696
INSULATION RESISTANCE MINIMUM (MEGOHMS)	1697
NO RUPTURE.	1698

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
3139	MEASUREMENT(S) BEFORE, AFTER, AND DURING SHOCK TESTING SHALL BE 3139.
1694	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1694.
1696	SHORT CIRCUIT. THE CIRCUIT SHALL OPEN AND REMAIN OPEN FOR THE TEST DURATION PERIOD.
1697	MINIMUM INSULATION RESISTANCE SHALL BE 1697 MEGOHM(S).
1698	THE BODY OF THE FUSE SHALL NOT RUPTURE DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1688
AS FOLLOWS:	1687
TEST CURRENT (AMPERES)	1689
TEST VOLTAGE (VOLTS)	1690
TEST DURATION (SECONDS)	1693
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
RESISTANCE CHANGE MAXIMUM (PERCENT)	3114

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1688	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1688.
1687	SHORT CIRCUIT. TESTING SHALL BE PERFORMED AS FOLLOWS:
1689	TEST CURRENT SHALL BE 1689 AMPERE(S),
1690	TEST VOLTAGE SHALL BE 1690 VOLT(S).
1693	THE DURATION OF THE TEST APPLICATION SHALL BE 1693 SECOND(S).
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3114	RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3114 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TERMINAL STRENGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S) .
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S) .
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE MINIMUM (MEGOHMS)	3115
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3115	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 3115 MEGOHM(S) .
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(NEWTON-METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
RESISTANCE CHANGE MAXIMUM (PERCENT)	3116
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
MEASUREMENTS (DES)	3140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421. NEWTON-METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3116	RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3116 PERCENT.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
3140	MEASUREMENT(S) BEFORE AND AFTER THE THERMAL SHOCK TEST SHALL BE 3140.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
CONTINUITY BREAK MAXIMUM (MICROSECONDS)	3117
RESISTANCE CHANGE MAXIMUM (PERCENT)	3118
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1455 VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.

1456 VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1473 THERE SHALL BE NO DISCONTINUITY DURING TEST.

1469 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

3117 BREAK IN CONTINUITY DURING TESTING SHALL BE NOT GREATER THAN 3117 MICROSECOND(S) .

3118 RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3118 PERCENT.

1446 VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.

1447 VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.

1448 TEST CONDITION LETTER 1448 SHALL APPLY.

6200 THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.

4709 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4798 MOUNTING SHALL BE BY THE NORMAL METHOD.

4707 MOUNTING SHALL BE IN ACCORDANCE WITH 4707.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARATERISTIC NAME	CHAR CODE
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
MEASUREMENTS (DES)	3141
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
NO DISCONTINUITY DURING TEST.	1490
CONTINUITY BREAK MAXIMUM (MICROSECONDS)	3119
RESISTANCE CHANGE MAXIMUM (PERCENT)	3120
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1533 THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.

1534 THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.

3141 MEASUREMENT(S) SHALL BE 3141.

1475 VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.

1476 VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1480 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1490 THERE SHALL BE NO DISCONTINUITY DURING TEST.

3119 BREAK IN CONTINUITY DURING TESTING SHALL BE NOT GREATER THAN 3119 MICROSECOND(S) .

3120 RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3120 PERCENT.

1466 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.

1467 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
RATED LOAD APPLIED (PERCENT)	6201
MEASUREMENTS PRIOR TO TEST (DES)	3142
MEASUREMENTS AFTER TEST (DES)	3143

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1470 DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

4731 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4730 MOUNTING SHALL BE BY THE NORMAL METHOD.

4729 MOUNTING SHALL BE IN ACCORDANCE WITH 4729.

1535 THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.

1536 THE DIRECTION OF MOTION SHALL BE PERPENDICULAR OF THE LONGITUDINAL AXIS.

4979 THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.

4978 THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.

1537 THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.

6201 THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.

3142 TEST AND MEASUREMENTS PRIOR TO VIBRATION SHALL BE 3142.

3143 TEST AND MEASUREMENTS AFTER VIBRATION SHALL BE 3143.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RAMDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
RESISTANCE CHANGE MAXIMUM (PERCENT)	3122
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

1435 VIBRATION, RAMDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.

1436 VIBRATION, RAMDON. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1538 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1374 THERE SHALL BE NO DISCONTINUITY DURING TEST.

1545 THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).

1546 THE DISCONTINUITY SHALL BE NOT GREATER THAN l546 MICROSECOND(S).

3122 RESISTANCE CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 3122 PERCENT.

1426 VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE EASE DOCUMENT, EXCEPT 1426.

1427 VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.

1428 TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3100
VOLTAGE DROP MAXIMUM (VOLTS)	3101
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3123
MEASURED WITH HIGH IMPEDANCE VOLTMETER.	3124
RATED VOLTAGE (PERCENT)	3125
DURATION BEFORE MEASUREMENT (MINUTES)	3126
DURATION OF MEASUREMENT (MINUTES)	1600
TEMPERATURE (DEGREES CELSIUS)	1601
RATED CURRENT (PERCENT)	3144
STORAGE CONDITONS	
(YEARS)	1529

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
3100	VOLTAGE DROP.	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3100.
3101	VOLTAGE DROP.	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 3101 VOLT(S).
3123	VOLTAGE DROP.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3123.
3124	VOLTAGE DROP.	VOLTAGE DROP SHALL BE MEASURED USING A HIGH IMPEDANCE VOLTMETER WITH MEASUREMENTS TAKEN AS CLOSE TO THE FUSE ELEMENT AS PRACTICABLE.
3125		FUSES SHALL BE SUBJECTED TO THE APPLICATION OF 3125 PERCENT OF THE RATED VOLTAGE DURING THE MEASUREMENT.
3126		THE FUSE TO BE MEASURED SHALL BE SUBJECTED TO RATED CURRENT AND VOLTAGE FOR 3126 MINUTE(S) BEFORE THE VOLTAGE DROP MEASUREMENT.
1600		THE DURATION OF THE VOLTAGE DROP MEASUREMENT' SHALL BE 1600 MINUTE(S).
1601		THE FUSES SHALL BE TESTED IN AN ENVIRONMENT OF 1601 DEGREES CELSIUS.
3144		THE RATED CURRENT SHALL BE 3144 PERCENT.
	STORAGE CONDITIONS.	
1529		ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CERTIFY MAXIMUM CURE DATE TO DELIVERY QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE XII IS USED.	
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 700l.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODES ARE USED TO REQUIRE HERMETIC SEALING.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
6372	PART MARKING.	PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING.	PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING.	PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.	
6991	(A) 6991.	
6992	(B) 6992.	
6993	(C) 6993.	
6994	(D) 6994.	
6995	(E) 6995.	

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CUSTODIANS:
ARMY-MI

USER ACTIVITY
ARMY-MU

REVIEW ACTIVITY:
ARMY-AT
ARMY-EV
ARMY-EL
ARMY-ME
ARMY-MR
ARMY-SG
ARMY-WC

PREPARING ACTIVITY:
ARMY-MI


(PROJECT EDS-A352)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

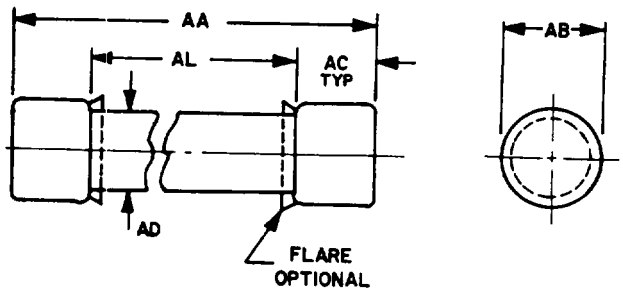


027-01-1

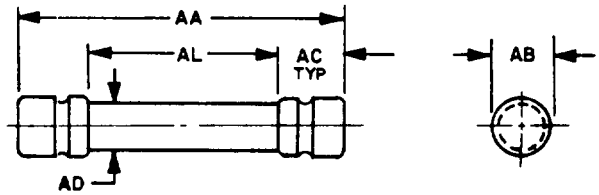


027-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

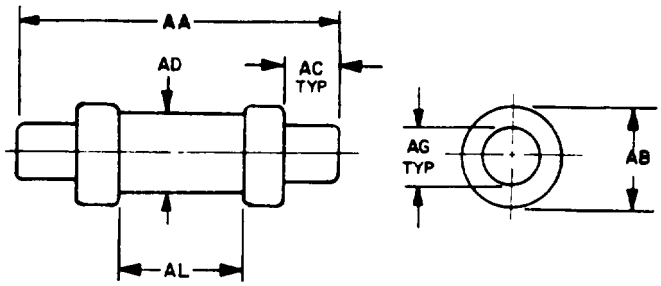


027-01-3

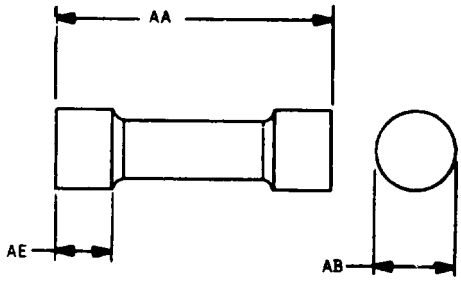


027-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

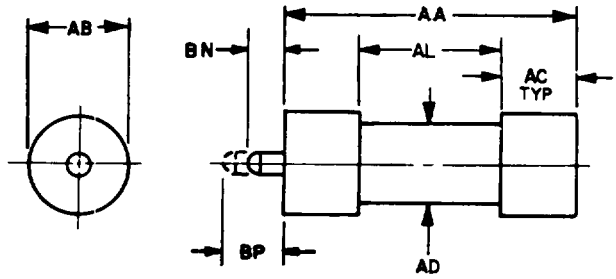


027-02-1

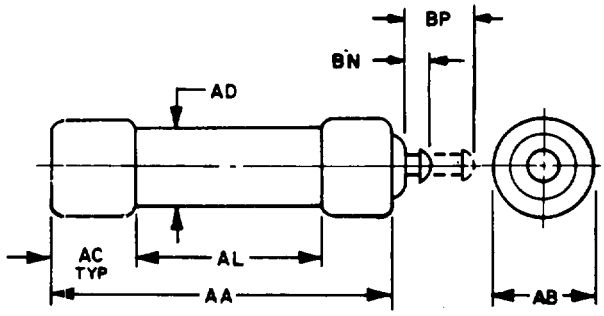


027-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

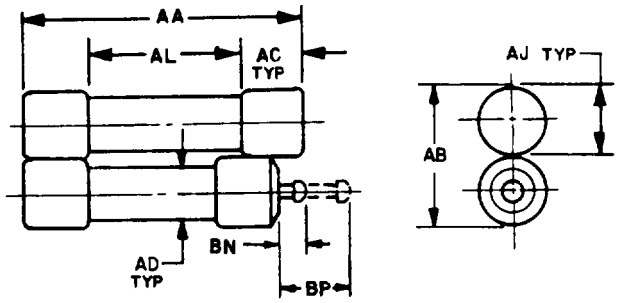


027-02-3

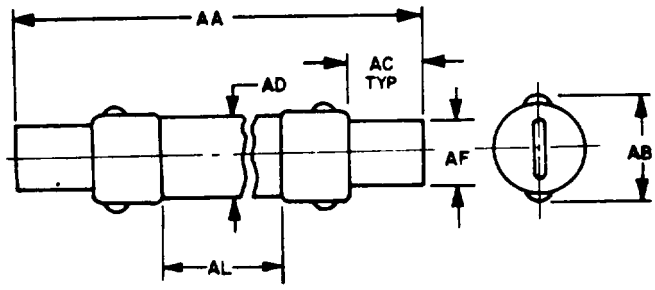


027-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

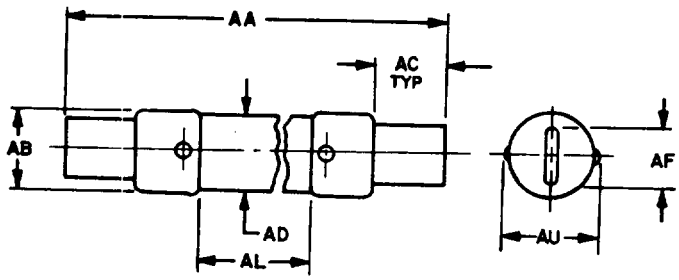


027-03-2

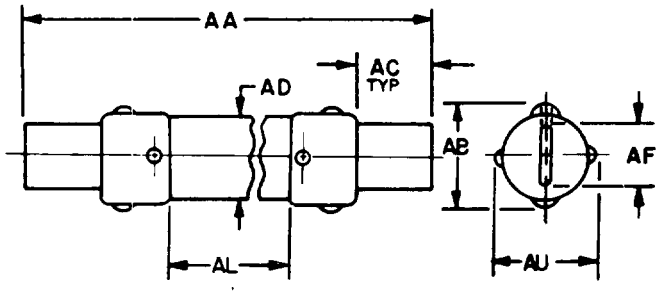


027-03-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

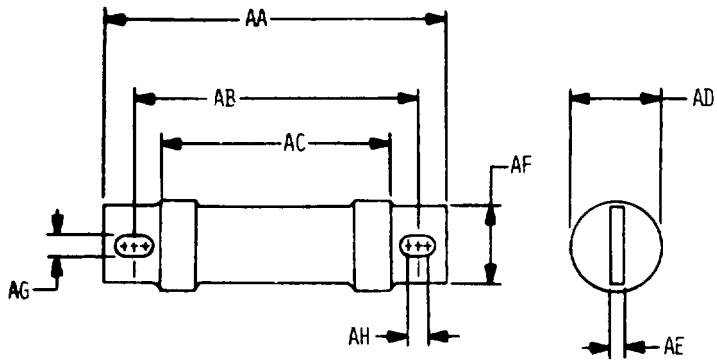


027-03-4

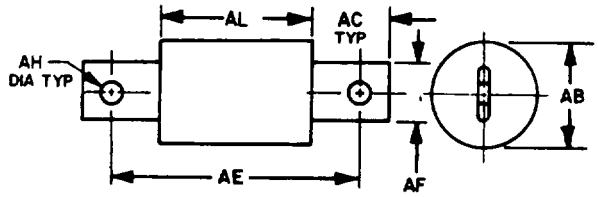


027-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

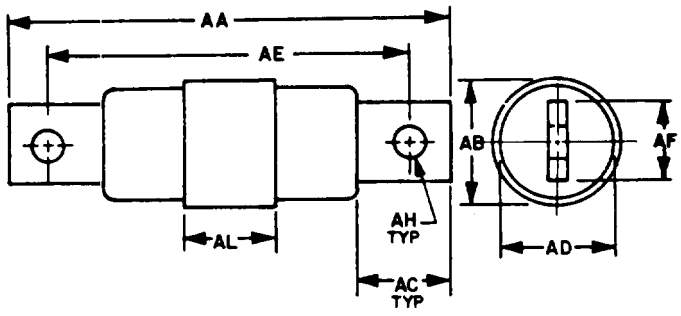


027-04-2

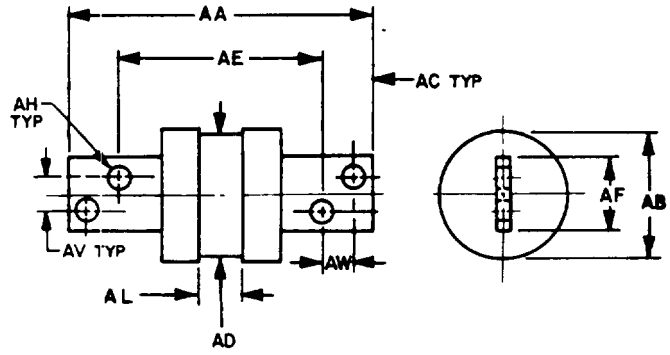


027-04-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

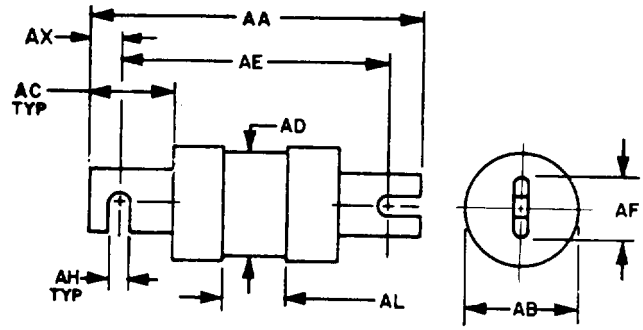


027-05-1

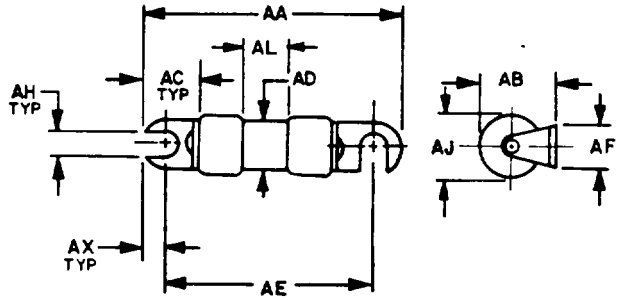


027-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

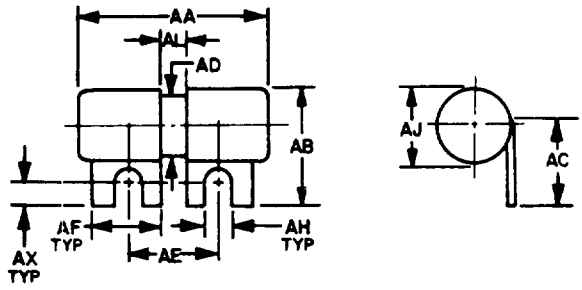


027-06-2

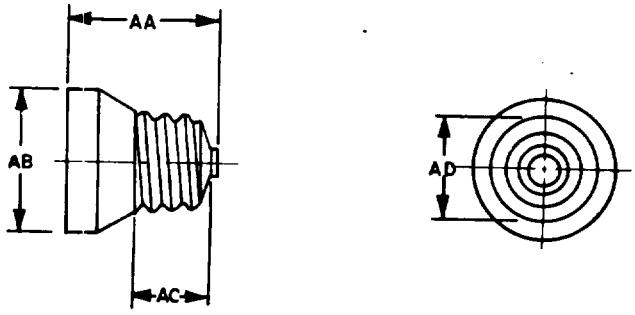


027-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

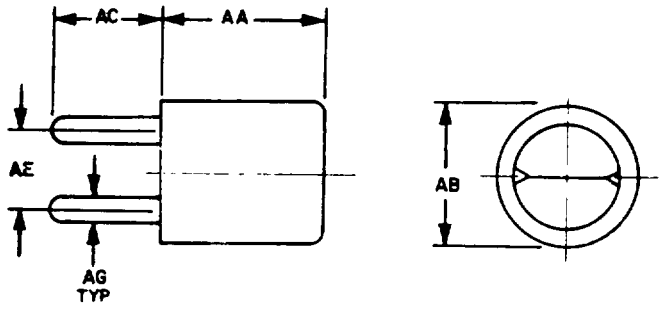


027-08-1

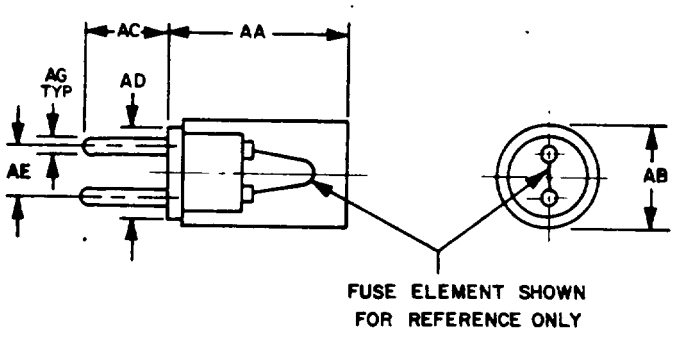


027-09-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

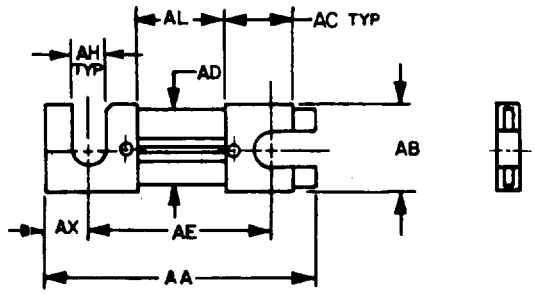


027-10-1

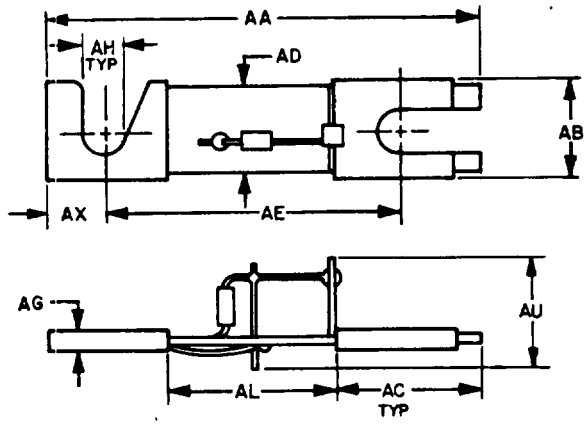


027-11-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

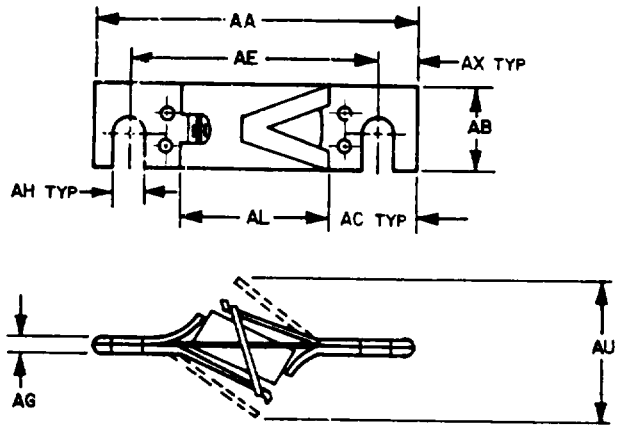

027-11-2

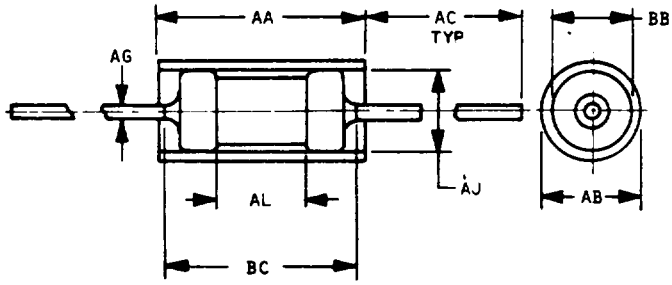

027-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1412	86	1476	92	1584	22
0102	12	1413	86	1477	42	1587	22
0103	12	1414	86	1478	78	1591	22
0104	12	1416	86	1480	92	1592	16
0105	12	1418	84	1482	76	1595	16
0107	14	1419	86	1483	76	1596	16
0108	14	1420	86	1486	76	1600	100
0700	12	1421	88	1488	78	1601	100
0800	12	1426	96	1490	92	1602	24
1004	12	1427	96	1494	76	1604	26
1005	12	1428	96	1497	48	1605	26
1006	12	1429	50	1498	48	1607	26
1008	12	1430	98	1500	80	1612	24
1009	18	1431	98	1502	80	1613	24
1371	48	1432	52	1504	80	1615	26
1372	50	1433	84	1508	78	1616	24
1373	48	1435	96	1509	78	1617	26
1374	96	1436	96	1511	48	1618	26
1375	86	1438	98	1520	50	1619	56
1376	48	1439	98	1522	50	1620	56
1377	48	1446	90	1523	50	1621	54
1378	48	1447	90	1524	50	1622	56
1380	46	1448	90	1529	100	1623	54
1381	50	1449	52	1533	92	1625	56
1383	50	1451	76	1534	92	1626	54
1386	46	1452	98	1535	94	1627	26
1387	48	1453	98	1536	94	1630	54
1388	48	1455	90	1537	94	1631	54
1391	52	1456	90	1538	96	1632	54
1394	50	1459	98	1539	70	1636	20
1395	52	1462	98	1545	96	1637	20
1396	50	1464	76	1546	96	1638	20
1397	52	1466	92	1570	22	1639	20
1398	50	1467	92	1572	22	1640	20
1400	50	1468	78	1574	22	1641	20
1404	50	1469	90	1575	22	1642	26
1406	52	1470	94	1576	20	1643	26
1407	48	1471	78	1577	22	1644	26
1410	86	1473	90	1580	22	1645	26
1411	86	1475	92	1581	22	1649	56

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1664	56	1740	25	1786	57	3133	54
1665	56	1741	25	1787	57	3134	54
1672	28	1742	25	1788	57	3135	54
1673	28	1743	25	1789	57	3136	70
1675	28	1744	25	1790	57	3137	78
1677	28	1745	25	1791	57	3138	78
1678	28	1746	25	1792	57	3139	80
1681	28	1747	25	1793	57	3140	88
1682	28	1748	25	1794	57	3141	92
1683	28	1749	25	1795	57	3142	94
1684	28	1750	25	3100	100	3143	94
1687	82	1751	25	3101	100	3144	100
1688	82	1752	25	3102	30	4662	84
1689	82	1753	25	3103	34	4663	84
1690	82	1760	57	3105	42	4664	84
1693	82	1761	57	3106	44	4665	84
1694	80	1762	57	3107	48	4666	84
1696	80	1763	57	3108	52	4667	84
1697	80	1764	57	3109	64	4669	66
1698	80	1765	57	3110	76	4671	66
1701	38	1766	57	3111	76	4672	82
1702	38	1767	57	3112	78	4675	82
1703	38	1768	57	3113	78	4677	82
1704	38	1769	57	3114	82	4683	84
1705	38	1770	57	3115	86	4684	80
1706	38	1771	57	3116	88	4685	80
1708	38	1772	57	3117	90	4686	80
1709	38	1773	57	3118	90	4689	64
1712	38	1774	57	3119	92	4691	66
1713	38	1775	57	3120	92	4692	66
1730	25	1776	57	3122	96	4694	66
1731	25	1777	57	3123	100	4695	66
1732	25	1778	57	3124	100	4698	64
1733	25	1779	57	3125	100	4700	64
1734	25	1780	57	3126	100	4701	64
1735	25	1781	57	3128	64	4703	78
1736	25	1782	57	3129	32	4707	90
1737	25	1783	57	3130	32	4708	90
1738	25	1784	57	3131	36	4709	90
1739	25	1785	57	3132	44	4713	88

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4714	88	4771	68	4850	36	4971	44
4715	88	4772	68	4853	42	4975	98
4717	36	4773	68	4854	32	4976	98
4718	64	4782	68	4855	34	4977	98
4729	88	4788	42	4856	34	4978	94
4722	88	4790	42	4857	58	4979	94
4723	88	4791	40	4858	58	4980	52
4726	88	4793	42	4859	32	4981	52
4729	94	4795	42	4861	34	4983	52
4730	94	4798	40	4862	34	4984	54
4731	94	4799	40	4867	36	4985	52
4732	72	4803	42	4869	36	4986	52
4734	72	4805	42	4870	36	4989	66
4735	74	4809	46	4872	70	4991	52
4736	74	4810	46	4874	34	5000	36
4737	72	4811	46	4875	34	5209	102
4738	72	4812	46	4878	68	4297	60
4739	72	4813	42	4884	30	6200	90
4740	74	4814	46	4885	30	6201	94
4741	74	4815	40	4886	30	6202	44
4742	74	4819	44	4890	42	6203	78
4743	76	4820	44	4891	32	6204	80
4745	72	4822	44	4894	30	6205	84
4746	72	4825	44	4897	36	6206	44
4748	72	4829	66	4900	32	6207	44
4749	74	4830	66	4901	30	6267	36
4740	74	4831	68	4902	32	6279	68
4751	74	4834	66	4906	30	6280	32
4752	74	4835	68	4908	28	6282	58
4754	40	4836	66	4942	102	6283	60
4755	40	4838	68	4943	102	6284	60
4756	40	4839	66	4944	102	6285	60
4760	38	4842	36	4950	18	6286	58
4761	40	4843	58	4952	70	6287	60
4762	40	4844	36	4956	70	6288	60
4764	82	4845	36	4958	70	6289	60
4765	70	4846	36	4959	70	6291	58
4766	70	4847	34	4960	70	6292	32
4768	98	4848	36	4969	44	6293	32
4770	68	4849	30	4970	44	6294	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6296	84	6922	64				
6299	70	6923	62				
6300	30	6924	64				
6308	32	6929	60				
6310	32	6930	62				
6311	32	6937	62				
6312	32	6939	62				
6320	72	6941	14				
6321	72	6942	14				
6322	72	6991	l04				
6323	74	6992	104				
6324	74	6993	l04				
6325	74	6994	104				
6326	74	6995	104				
6328	74	7001	l02				
6329	74	7002	l02				
6330	74	7003	l02				
6331	76	7004	l02				
6332	76	7005	l02				
6333	76	7021	22				
6359	46	7022	22				
6369	12	7572	18				
6370	72	7577	18				
6371	58	7591	16				
6372	104	7592	16				
6696	62	7594	16				
6697	62	7595	16				
6698	62	7597	16				
6699	62	7598	16				
6700	62	7618	16				
6701	62	7619	16				
6706	64	7627	18				
6707	64	7628	16				
6710	62	7629	l04				
6713	62	7630	104				
6870	102	7641	18				
6873	12						
6874	14						
6920	64						
6921	62						

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:53Z
Check the source to verify that this is the currentversion before use.

INDEX

	Page
Additional Part Marking	104
Additional Requirements	102
Aperture Cards Required	14
Applicable Documents	106
Base Document	12
Blow Rate	16
City, State, Zip	12
Company Name/Command	12
Configuration	18
Contract Number/Office Symbol	12
Control	12
Current Carrying Capacity	24
Current Rating	16
DC Resistance	28
Definition of Hermetic Sealing	104
Design and Construction	20
Dielectric Withstanding Voltage At Reduced Barometric Pressure	28
Dielectric Withstanding Voltage At Sea Level	34
Enclosure	20
Explosion	38
Ferrule Alignment	20
Finishes	20
Frequency Rating	18
Format	12
Fungus	38
Government Design Activity	12
Humidity	40
Illustrations	18
Immersion	44
Insulation Resistance	46
Materials	20
Moisture Resistance	50
Mounting Hardware	102

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Notes	106
Nomenclature	106
Overload Interrupt	54
Packaging	106
Part Marking	104
Part Numbering	14
Part Number Cross-Reference	106
Performance Characteristics	102
Phone Number	12
Quality Assurance Provisions	106
Radiographic	58
Reliability Screening	60
Requester FSCM	12
Requester's Name	12
Resistance To Soldering Heat	64
Resistance To Solvents	66
Revision of AEDPS Document Number	14
Salt Spray	68
Sand and Dust	70
Scope	14
Seal	72
Shock, High Impact	76
Shock, Specified Pulse	78
Short Circuit	80
Solderability	82
Source Table	14
Storage Conditions	100
Street Building	12
Style	22
Superseded Document	106
System Application	12
Tabulated Characteristics	18
Terminal Strength	84
Thermal Shock (Temperature Cycling)	88

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Units of Measure	14
Vibration, High Frequency	90
Vibration, Low Frequency	92
Vibration, Random	
Voltage Drop	100
Voltage Rating	16
Weight/Mass	22
Workmanship	102

 U.S. GOVERNMENT PRINTING OFFICE: 1986 - 605-036/40693

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.											
*TITLE CODE						*REQUESTER NO.					
1	2	3	4	5	6	7	8	9	10	11	12

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF____

CHAR CODE	CHARACTERISTIC VALUE
	1 5 10 15 20 25 30 35 40 45 50 55 60

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.	
*TITLE CODE (1 2 3 4 5 6)	*REQUESTER NO. (7 8 9 10 11 12)

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

	CHAR CODE			
*REQUESTER'S NAME	Ø	1	Ø	1
*COMPANY NAME/COMMAND	Ø	1	Ø	2
*STREET/BUILDING	Ø	1	Ø	3
*CITY, STATE, ZIP	Ø	1	Ø	4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE	Ø	1	Ø	5
*REQUESTER FSCM	1	Ø	Ø	4
*CONTRACT NO./OFFICE SYMBOL	1	Ø	Ø	5
*BASE DOCUMENT	1	Ø	Ø	6
*SYSTEM APPLICATION	1	Ø	Ø	8
*GOVERNMENT DESIGN ACTIVITY FSCM	6	3	6	9
*FORMAT: SIX SECTION DOCUMENT.	Ø	7	Ø	Ø
OR ONE SECTION DOCUMENT.	Ø	8	Ø	Ø
REVISION OF AEDPS DOCUMENT NO.	Ø	1	Ø	8
*CONTROL: SOURCE.	6	8	7	3
OR SPECIFICATION.	6	8	7	4
UNIT OF MEASURE: U.S.	6	9	4	1
OR SI.	6	9	4	2
*SOURCE TABLE	9	A	A	B

CHARACTERISTIC VALUE

1 5 10 15 20 25 30 35 40 45 50 55 60

PLEASE SUPPLY THE FOLLOWING:
DASH-NUMBERED PART___REV___NOTICE#___

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (0)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (CHARACTERS Ø, S̄, I, Z CORRECTLY WRITTEN)

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:53Z
Check the source to verify that this is the currentversion before use.

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: AMSMI-EDC
Redstone Arsenal, AL 35898

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.