MILITARY SPECIFICATION
BATTERY ASSEMBLY, STORAGE: 11737972

This specification is approved for use by the US Army Armament Research and Development Command and is available for use by all Departments and Agencies of the Department of Defense.

WARNING - BURN HAZARD

THIS BATTERY IS CAPABLE OF DELIVERING SUFFICIENT SHORT CIRCUIT CURRENT TO RESULT IN TEMPERATURES THAT CAN FUSE METAL PARTS TOGETHER AND CAUSE SEVERE BURNS TO PERSONNEL.

1. SCOPE

1.1 This specification covers one type of battery assembly known as Battery Assembly, Storage: 11737972 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel: Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance, and Disposition of
MIL-S-45743	Solder, Manual Type, High Reliability Electrical, Electronic, Instrument, Communication, and Radar for Aerospace and Control Systems, Procedure for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods

DRAWINGS (See 6.4)

U.S. ARMY, ARMAMENT RESEARCH AND DEVELOPMENT COMMAND (ARRADCOM)

11737972	Battery Assembly, Storage: 11737972

PACKAGING DATA SHEET

11737972	Packaging of Storage Battery Assembly: 11737972

(Copies of specifications, standards, drawings, and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication. The storage battery assembly, herein referred to as the battery, shall be nickel cadmium battery manufactured in accordance with Drawing 11737972 and drawings pertaining thereto.

3.2 General specification. Where applicable, the battery shall meet the following requirements of MIL-F-13926:

a. Dimensions and tolerances
b. Inorganic protective surface finishes
c. Electrical and electronic assemblies
d. Part identification and marking

3.2.1 Soldering. Where required, soldering shall be in accordance with MIL-S-45743 except that bare copper wire shall be permitted at clipped ends of component leads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

3.3. Environmental.

3.3.1 Temperature.

3.3.1.1 Non-operating. The battery shall meet the requirements of 3.4.4 at standard ambient temperature ($73^{o} \pm 18^{o}F$) after exposure to and thermal stabilization at -80° and $+160^{o}F$.

3.3.1.2 Operating. The battery shall meet the requirements of 3.4.4 while exposed to and thermally stabilized at -40° and $+150^{o}F$, subsequent to which the requirements of 3.4 shall be met at standard ambient temperature ($73^{o} \pm 18^{o}F$).

3.3.1.3 Charging. The battery shall not be damaged, nor shall the performance be impaired after charging and discharging in accordance with Table I at the charge-discharge temperatures listed in Table II.

TABLE I
BATTERY CHARGING/DISCHARGING PROCEDURE

Step	Discharge Rate (Amperes)	Cutoff Point (Volts)	Charge Rate (Amperes)	Charge Duration (Hours)
One	2.0 ±0.1	23.5 ±0.5	NA	NA
Two	0.36 ±0.04	20.0 ±1.5	NA	NA
Three*	NA	NA	1.00 ±0.05	4.0 ±0.1
Or, Option	NA	NA	0.38 ±0.05	15.0 ±1.0
Four*	NA	NA	0.20 ±0.01	20.0 ±0.5

*At $-25^{o}F$, step four shall apply in lieu of step three. At all other battery temperatures, step three shall apply.

NA = Not applicable.

TABLE II
CHARGE/DISCHARGE TEMPERATURES

Item	Charge Temperature Degrees C	(Degrees F)	Discharge Temperature Degrees C	(Degrees F)
1	$+65.6^{+0}_{-4.0}$	$(+150.0^{+0}_{-7.2})$	+25.0 ±2.0	(+77.0 ±3.6)
2	$+23.9^{+0}_{-4.0}$	$(+75.0^{+0}_{-7.2})$	$-31.7^{+4.0}_{-0}$	$(-25.0^{+7.2}_{-0})$
3	$-31.7^{+4.0}_{-0}$	$(-25.0^{+7.2}_{-0})$	$-31.7^{+4.0}_{-0}$	$(-25.0^{+7.2}_{-0})$

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

3.3.1.4 Temperature shock. The battery shall not be damaged, nor shall the performance be impaired after exposure to a temperature change from +160° to -80°F in 30 minutes and, after stabilization at -80°F, return to +160°F in 30 minutes.

3.3.2 Atmospheric pressure.

3.3.2.1 Nonoperating. The battery shall not be damaged, and shall meet the requirements of 3.4 after exposure to barometric pressures equivalent to altitudes up to 50,000 feet.

3.3.2.2 Operating. The battery shall not be damaged, and shall meet the requirements of 3.4 during operation at barometric pressures equivalent to altitudes from sea level to 10,000 feet.

3.3.3 Vibration. The battery shall show no physical failure and shall meet the requirements of 3.4.1 after being exposed to the following vibratory conditions:

a.	Amplitude:	0.5 inch maximum (double amplitude)
b.	Vibratory motion:	Simple harmonic
c.	Sweep time:	5 to 500 to 5 Hertz in a 25-minute period
d.	Vibration cycling:	Three logarithmic sweeps applied to each of the three mutually perpendicular axes.

3.3.4 Shock. The battery shall meet the requirements of 3.4.1 after being exposed to a total of 18 shock impulses, three in each direction along the three mutually perpendicular axes. Each shock impulse shall be a half-sine wave with a time duration of 3.5 $\pm$0.5 milliseconds and a peak amplitude of 100G's.

3.4 Performance. Unless otherwise specified, the battery shall meet the performance requirements of this specification at standard ambient temperature (73° $\pm$ 18°F).

3.4.1 Loads. The battery shall perform as specified herein when the loads necessary to provide the firing profile shown in figure 1 are applied.


3.4.2 Electrolyte leakage. The battery shall show no evidence of electrolyte leakage during exposure to any of the environmental, storage, or operating conditions specified herein.

3.4.3 Internal resistance. When charged in accordance with 3.4.4, the internal resistance of the battery shall be $\leq$0.65 ohm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

3.4.4 Battery current capacity. When sequentially preconditioned and charged in accordance with Table I, the battery shall have a minimum current capacity of 0.8 ampere-hour, and capable of providing a minimum of 30 consecutive laser range finder (LRF) firing profiles as shown in figure 1. The terminal voltage shall be +29.0 +5.0 Volts direct current (Vdc) provided the difference between the charge and discharge temperature is $\leq$100°F.

3.4.5 Battery voltage range. The battery voltage range, under the use rate conditions of figure 1, shall be from +24.0 Vdc (cutoff voltage) to +34.0 Vdc, when initially charged according to 3.4.4. After being charged and placed in storage under any one schedule of Table III, the nominal battery voltage shall be +29.0 ±5.0 Vdc.

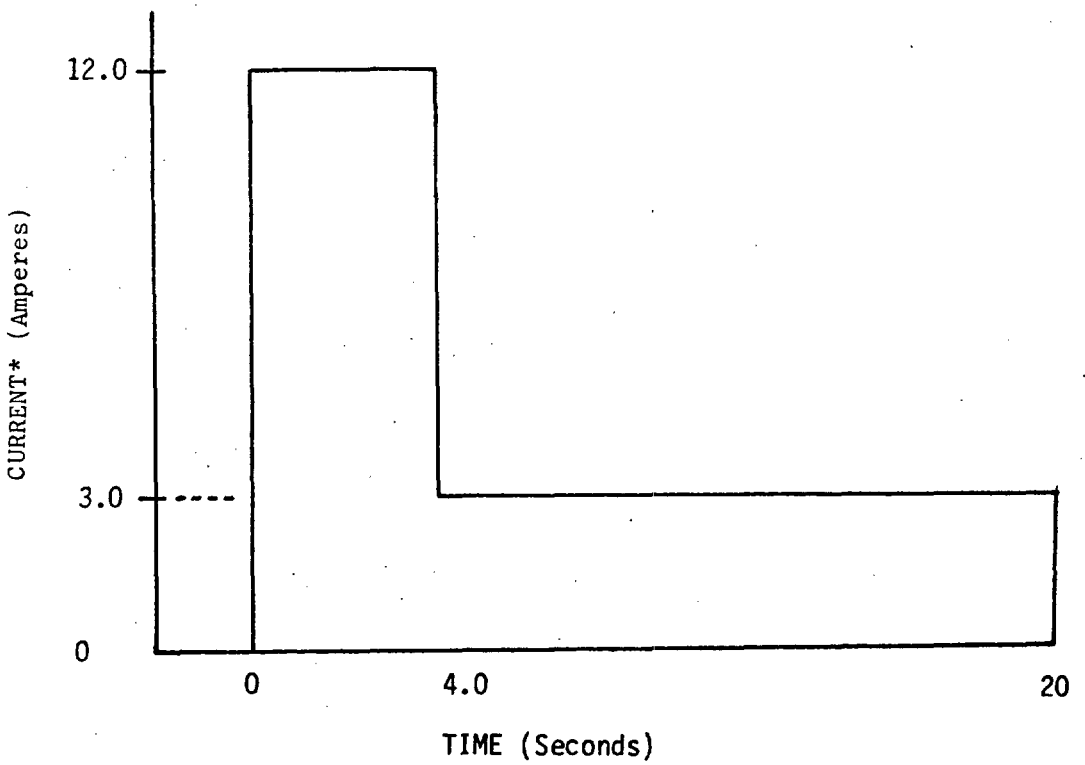

*Current Level Tolerances: ±5 percent

Figure 1. Battery Simulated LRF Firing Profile

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

3.4.6 Battery charge retention. When charged according to 3.4.4, the battery, after storage under any one schedule defined in Table III, shall supply a minimum of 30 simulated LRF firing profiles as shown in figure 1 at a terminal voltage of +29.0 ±5.0 Vdc.

TABLE III
CHARGE RETENTION STORAGE SCHEDULES

Schedule	Storage Temperature		Hours per Day	Storage Period	
	Degrees C	(Degrees F)		Days	(Hours)
1	25.0 ±2.8	(77.0 ±5.0)	24	30	(720)
2	37.8 ±2.8 and 51.6 ±2.8	(100.0 ±5.0) and (125.0 ±5.0)	20 4	14	(336)
3	65.5 ±2.8	(150.0 ±5.0)	24	3	(72)

3.4.7 Insulation resistance. The insulation resistance between the battery terminals and the case shall be equal to or greater than 5 megohms at a potential of 500 ±50 Vdc during exposure to temperatures ranging from +55° to +91°F and a relative humidity of 65% ± 15 %.

3.4.8 Battery cycle life. When charged and discharged in accordance with 3.4.4, the battery shall have a minimum life of 100 charge/discharge cycles, after which the battery shall supply a minimum of 30 simulated LRF firing profiles as shown in Fig. 1 when charged in accordance with 3.4.4.

3.4.9 Workmanship. The battery shall meet the workmanship requirements of MIL-F-13926 and the applicable specifications listed in the Technical Data Package (TDP).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. In addition, the Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

4.1.1 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 Classification of inspections. Unless otherwise specified herein or in the contract, the following types of inspection shall be conducted on this item:

a. First Article Inspection

b. Quality Conformance Inspection

4.3 First Article Inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the contracting officer for evaluation in accordance with the provision of 4.3.2. Unless otherwise specified, the sample for first article approval tests shall consist of three batteries plus three each of all items convered by Supplementary Quality Assurance Provisions (SQAP). The responsibility (Government or Contractor) for First Article Testing shall be as specified in the contract.

4.3.2 Inspections to be performed.

4.3.2.1 Battery Assembly, Storage. Selected first article samples shall be tested as specified herein for all requirements of this specification.

4.3.3 Rejection. Should any battery in the first article sample fail to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure.

4.4 Quality Conformance Inspection.

4.4.1 Inspection lot formation. Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.4.2 Examination. The examinations listed herein for Classification of Defects shall be performed on inspection lots as defined in 4.4.1 of this specification.

4.4.2.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in the Supplementary Quality Assurance Provisions (SQAP) listed in the Technical Data Package (TDP). In the absence of SQAP's the applicable Quality Assurance Provisions of MIL-F-13926 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

4.4.2.2 Battery Assembly, Storage. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105, Inspection Level II, and the sampling plans specified in Tables IV, V and VI herein. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in Tables IV, V and VI shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE IV CLASSIFICATION OF DEFECTS

CLASS	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
CRITICAL:			
MAJOR:	AQL 0.25% Defective		
101.	Leakage (Electrolyte)	3.4.2	4.6.2
102.	Internal Resistance	3.4.3	4.6.3
103.	Battery Current Capacity	3.4.4	4.6.4
104.	Battery Voltage Range	3.4.5	4.6.5
105.	Battery Charge Retention	3.4.6	4.6.6
106.	Insulation Resistance	3.4.7	4.6.7
107.	Battery Cycle Life	3.4.8	4.6.8
108.	Workmanship	3.4.9	Visual
MINOR:	NONE		

NOTE: The tests in Table IV shall be conducted at a temperature of $73^{o} \pm 18^{o}F$ and with the loads applied as specified in 3.4.1, except for characteristic 108.

4.4.2.3 Acceptance and Rejection. Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4.3 Special sampling.

4.4.3.1 General. One battery shall be randomly selected as a sample from each 100 produced or from each month's production, whichever occurs first. The sample shall meet the requirements and tests in Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

TABLE V CLASSIFICATION OF DEFECTS

NO	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301.	Fabrication	3.1	Applicable drawings, Visual
302.	General Specification	3.2	MIL-F-13926, Visual

NOTE: The tests for characteristics 301 and 302 shall be conducted at a temperature of $73^{o} \pm 18^{o}F$.

4.4.3.2 Environmental. Three batteries shall be selected at random as samples from each 50 produced, or from each month's production, whichever occurs first. Each sample shall meet the requirements and tests in Table VI and shall then meet the requirements and tests in Table IV.

TABLE VI CLASSIFICATION OF DEFECTS

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
303.	Temperature(Non-operating)	3.3.1.1	4.6.1.1
304.	Temperature(Operating)	3.3.1.2	4.6.1.2
305.	Charging	3.3.1.3	4.6.1.3
306.	Atmospheric Pressure (Non-operating)	3.3.2.1	4.6.1.5
307.	Atmospheric Pressure (Operating)	3.3.2.2	4.6.1.5.1
308.	Vibration	3.3.3	4.6.1.6
309.	Shock	3.3.4	4.6.1.7

NOTE: The tests for characteristics 308 and 309 shall be conducted at a temperature of $73^{o} \pm 18^{o}F$.

4.4.3.3 Verification, follow-up. Three batteries shall be selected, randomly, as samples from production lots approximately at 25%, 50% and 75% completion interval of each production order or contract. Each sample shall meet the requirement and test in Table VII and shall then meet the requirements and tests in Table IV.

TABLE VII - CLASSIFICATION OF DEFECTS

NO	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
310.	Temperature Shock	3.3.1.4	4.6.1.4

4.4.3.4 Failure of a sample. Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrective action has been taken by the contractor and the resubmitted product has been approved. (See 4.4.2.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

4.5 Inspection Equipment.

4.5.1 Inspection equipment requirements. Requirements for inspection equipment to perform examinations and tests are specified herein an in specific contract clauses as applicable. See Section 6 of this specification for general provisions applicable to inspection designs.

4.5.2 Government furnished inspection equipment. Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.3 Contractor furnished inspection equipment. Contractor test equipment utilized to perform acceptance inspection shall be compatible to the limits outlined in Table VIII and in paragraph 6.3.2. Test equipment designs provided by the contractor shall be submitted for approval as specified in 6.3.3.

TABLE VIII
INSPECTION EQUIPMENT

Item	Nomenclature	Description
1	Dc voltmeter	Range: 0 to 50 Vdc Accuracy: ±0.3 percent
2	Dc ammeter	Range: 0 to 15 Amperes Accuracy: ±1.0 percent
3	Battery charger	Range: 200 milliamperes (mA) Accuracy: ±10 mA Range: 1 Ampere Accuracy: ±0.05 Ampere
4	Test fixture	Simulate the service installation of the battery
5	Megohmmeter	Range: 1 to one thousand megohms Accuracy: ±10%

4.6 Methods of inspection.

4.6.1 Test conditions. Unless otherwise specified, the "Test Conditions" shall be in accordance with the "General Requirements" of MIL-STD-810 and the battery will be in a charged state prior to performing any tests specified herein. The loads shall be applied only as required to perform specified tests.

CAUTION

DO NOT OPERATE BATTERY AT VOLTAGES BELOW THE CUTOFF LEVEL OF +24.0 VDC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

4.6.1.1 Temperature, non-operating. Perform the test for high temperature in accordance with method 501.1, Procedure I of MIL-STD-810, except that the maximum internal chamber temperature shall be stabilized at +160°F for minimum period of 48 hours. Perform the test for the low temperature in accordance with Method 502.1, Procedure I of MIL-STD-810, except that the minimum internal chamber temperature shall be stabilized at -80°F for a minimum period of 48 hours. Upon completion of each test and after the temperature is stabilized at room ambient, verify that the requirements of 3.3.1.1 are met.

4.6.1.2 Temperature, operating. Perform the high temperature test in accordance with Method 501.1, Procedure I of MIL-STD-810, except that the maximum internal chamber temperature shall be stabilized at +150°F for a period of 6 hours. Verify that the high temperature requirements of 3.3.1.2 are met. Perform the low temperature test in accordance with Method 502.1 Procedure I of MIL-STD-810, except that the minimum internal chamber temperature shall be stabilized at -40°F for a period of 6 hours. Verify that the low temperature requirements of 3.3.1.2 are met.

4.6.1.3 Charging. Charge the battery in accordance with the charging procedure of Table I and at the charging temperatures of Table II, then discharge the battery at the corresponding discharge temperatures of Table II. Verify that the requirements of 3.3.1.3 are met.

4.6.1.4 Temperature shock. Perform this test in accordance with Method 503.1 Procedure I of MIL-STD-810, except that the low temperature shall be -80°F and the maximum transfer time between chambers shall be 30 minutes. Upon completion of the test and upon returning to room ambient, verify that the requirements of 3.3.1.4 are met.

4.6.1.5 Atmospheric pressure non-operating. Place the battery in a test chamber as defined in Method 500.1, Procedure I of MIL-STD-810. The chamber internal pressure shall be reduced to the equivalent of 50,000 feet above sea level and maintained for a period of 8 hours. Upon completion of the 8 hour soak period return the pressure to room ambient. Verify that the requirements of 3.3.2.1 are met.

4.6.1.5.1 Atmospheric pressure operating. Place the battery in a test chamber as specified in 4.6.1.5. Reduce the chamber internal pressure to a level equivalent to 10,000 feet above sea level, and maintain this pressure for 4 hours. During the 4 hour exposure, operate the battery. Verify that the requirement of 3.3.2.2 is met. Return the pressure to room ambient and again operate the battery. Verify that the requirements of 3.3.2.2 are met.

4.6.1.6 Vibration. Perform this test utilizing the apparatus specified in Method 514.2 of MIL-STD-810 and in accordance with Part I of Procedure I therein, except that the vibratory conditions of 3.3.3 shall apply. Following vibration exposure, examine the battery for structural failures, loose hardware, wire breakage, and abrasion. Perform the tests of 4.6.2 through 4.6.8 inclusive. Verify that the requirements of 3.3.3 are met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

4.6.1.7 Shock. Perform this test utilizing apparatus specified in Method 516.2 of MIL-STD-810, in accordance with Procedure I therein and with the conditions specified in 3.3.4. Verify that the requirements of 3.3.4 are met.

4.6.2 Electrolyte leakage test. Examine the battery after each environmental test, operating test, or storage for electrolyte leakage. Verify that the requirement of 3.4.2 is met.

4.6.3 Internal resistance test. Measure the battery voltage during the 3.0 ampere and 12.0 ampere load conditions. Use the following equation to verify that the requirement of 3.4.3 is met:

$$R_{(int)} = \frac{E1 - E2}{9} \text{ ohms}$$

where:

$R_{(int)}$ = internal battery resistance (ohms)

E_1 = battery voltage when battery is supplying 3.00 $\pm$0.15 amperes

E_2 = battery voltage when battery is supplying 12.00 $\pm$0.60 amperes

4.6.4 Battery current capacity test. Precondition and charge the battery in accordance with Table I. Discharge the battery in accordance with 3.4.4. Verify that the requirements of 3.4.4 are met.

4.6.5 Battery voltage range test. Measure the battery voltage under the use rate of figure 1, or the storage schedule of Table III. Verify that the requirements of 3.4.5 are met.

4.6.6 Battery charge retention test. Store a battery at each of the schedules listed in Table III, using a separate battery for each schedule. Verify that the requirements of 3.4.6 are met.

4.6.7 Insulation resistance test. Measure the insulation resistance of the battery in accordance with Method 302, test condition B, of MIL-STD-202, between each battery terminal and the battery case. Verify that the requirements of 3.4.7 are met.

4.6.8 Battery cycle life test. Charge and discharge the battery as specified in Table I. Verify that the requirements of 3.4.8 are met.

5. PREPARATION FOR DELIVERY

5.1 Charge condition for shipment. Batteries shall be fully discharged prior to packaging for shipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

5.2 Packaging. Batteries shall be packaged in accordance with Packaging Data Sheet 11737972.

5.3 Packing for shipment. Batteries shall be packed for shipment in accordance with the requirements of MIL-P-14232, level C.

6. NOTES

6.1 Intended use. The battery is a functional part of the battery power supply intended for use in the Fire Control Rangefinder AN/VVG-1. The battery function is as follows:

a. To supply power to the Q-switch motor

b. To supply power to the electronics unit when the tank power voltage level falls below +18 Vdc.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Quantity required and delivery schedules.

c. Applicable packaging data sheet number (see 5.2).

d. Selection of applicable levels of preservation, packaging and packing.

e. Applicable stock number.

f. Requirements for First Article Submission, Including data requirements for certificates of conformance for materials.

6.3 Inspection equipment design.

6.3.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications (or SQAP) forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the Technical Data Package (TDP).

6.3.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.6 of this specification and with the "Test Conditions" specified in the "General requirements" of MIL-STD-810. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials and dimensions shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

6.3.3 Submission of designs for approval. Contractor designs shall be approved by the Government prior to fabricating or procuring the equipment. Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs and the required delivery schedule as stipulated in the contract. Submit designs as required to: Commander, US Army Armament Reserach and Development Command, ATTN: DRDAR-QAF-I, Dover, NJ 07801.

When the contractor submits inspection equipment designs to the Government for approval, he shall give the following information in his letter of transmittal:

a. The contract number
b. The contract item (name, model number, etc.)
c. The designs remaining to be submitted and the expected date of submittal

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARRADCOM.

Custodian:
Army - AR

Preparing Activity:
Army - AR

Project Number: 1240-A746

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:35Z
Check the source to verify that this is the current version before use.