INCH POUND

MIL-C-23486B(MC)
2 June 1989
SUPERSEDING
MIL-C-23486A(MC)
14 May 1969

MILITARY SPECIFICATION

COLLAR, COAT, MAN'S: POLYESTER/WOOL, GABARDINE, BLUE

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for the man's blue polyester/wool, gabardine, stand up collars.

1.2 Classification. The collars shall be of one type in the following widths and sizes as specified (see 6.2):

Schedule of Sizes

Collar length (inches)

14-1/2	15-3/4	16-3/4	17-3/4
15	16	17	18
15-1/4	16-1/4	17-1/4	18-1/2
15-1/2	16-1/2	17-1/2	18-3/4

Width of Collars

1-3/4 inches or 2 inches

NOTE: For collar sizes corresponding to coat sizes with which collar is worn, see 3.7 and 6.2.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, D.C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-301	- Thread, Silk
NN-P-71	- Pallet, Material Handling, Wood Stringer Construction, 2 Way and 4 Way (Partial)
UU-P-268	- Paper, Kraft, Wrapping
DDD-L-20	- Label, For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-F-495	- Finish, Chemical, Black, For Copper Alloys
MIL-C-10176	- Cloth, Gabardine, Wool, Polyester/Wool
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Box, Shipping, Fiberboard, (Modular Sizes)
MIL-C-29405	- Cloth, Broadcloth, Wool and Wool Nylon, (Moth proofed)
MIL-C-43718	- Cloth, Twill, Polyester, Polyester and Cotton, Polyester and Rayon

STANDARDS

FEDERAL

FED-STD-191	- Textile, Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Unless otherwise indicated, copies of federal and military specifications and standards are available from the Naval Publications and Forms Center (Attn: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U.S. Postal Service Manual

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington D.C. 20402.)

Department of Defense (DoD) Standard Color Card of
Official Standardize Shades for Sewing Threads 1968

(Application for copies should be address to the Color Association of the United States, 200 Madison Avenue, New York, NY 10016.)

2.2 Non-Government Publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless other specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20026.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications, specification sheets, or MS standards), the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. Standard samples, when furnished, are solely for guidance and information to the Contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:04Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection (see 6.6) in accordance with 4.4.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, polyester/wool gabardine, Marine Corps dark blue 2312, (see 6.3), 10.6 ounce, conforming to type II, class 12 of MIL-C-10176.

3.3.2 Lining. The material for lining the collar and making the collar eyelet covers, shall be cloth, rayon, twill, shade black 3202 (see 6.3), 3.7 ounce, conforming to class 1 of MIL-C-368.

3.3.3 Polyester and cotton. The material for binding the lower edge of collar interlining and the reinforcement pieces for collar eyelets shall be cloth, polyester and cotton, conforming to class 1 of MIL-C-43718 and be a black shade.

3.3.4 Collar interlining. The material for interlining the collar shall be cloth, buckram, cotton, double texture, laminated, starch finish, natural color, conforming to the following when tested as specified in section 4, Table IV. Alternates to this herein described buckram in 2 ply plain weave cotton or 3 ply bonded fabrics are available in industry and will be considered for use on a case by case basis. The requirements for stiffness, resilience, shrinkage, and stability will be required.

3.3.4.1 Buckram material. The buckram shall be made of cotton of suitable staple length and grade to meet the requirements of this specification, thoroughly cleaned, well carded, drawn and evenly spun.

3.3.4.2 Weave. The weave of the single plies of the cloth shall be four harness, 2 up and 2 down herringbone twill, 20 ends right and 20 ends left or the cloth shall be plain weave.

3.3.4.3 Yarns per inch. The two plies of the cloth shall each have a minimum thread count per inch of 68 in the warp and 48 in the filling.

3.3.4.4 Laminated cloth. The two plies of the cloth shall be thoroughly adhered together with a synthetic resin-type laminating material which shall not cause an objectionable odor in the finished cloth. The laminated cloth shall show no evidence of delamination after being subjected to the wet (dry) cleaning, accelerated aging, and perspiration tests specified in section 4, Table IV.

3.3.4.4.1 Finish. The laminated cloth shall have a starch finish. The original stiffness of the finished cloth, and the stiffness of the cloth after being subjected to the wet (dry) cleaning, accelerated aging, and perspiration tests shall conform to the following when tested as specified in section 4, Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

Stiffness, inch-pound	Minimum	Maximum
original	0.60	0.95
after accelerated aging	0.70	0.95
after wet (dry) cleaning	0.50	0.85
after perspiration	0.50	0.85

3.3.4.4.2 Weight. The weight of the finished laminated cloth shall be 21 to 23 ounces per square yard (see section 4, Table IV).

3.3.4.4.3 Breaking strength. The breaking strength of the finished laminated cloth shall be 100 pounds minimum in the warp direction and 80 pounds minimum in the filling direction when tested as specified in section 4, Table IV. After being subjected to the accelerated aging test (see section 4, Table IV), the breaking strength of the cloth shall be not less than the original breaking strength.

3.3.5 Padding for collar. The material for padding the collar shall be a suitable cotton felt, white, weighing 4.25 to 4.75 ounces per square yard when tested as specified in section 4, Table IV. As an alternate, a 100% polyester fiber with 100% rayon substrate needle punch material weighing 4.8 to 5.5 ounces per square yard may be used.

3.3.6 Piping. The material for piping the upper and lower edges of the collar shall be cloth, broadcloth, wool, scarlet 2501 (see 6.3), conforming to type I of MIL-C-29405.

3.3.7 Thread.

3.3.7.1 Silk thread. The silk thread shall conform to V-T-301. The thread for machine sewing shall conform to type I, size A, 3-ply for all outside seaming and stitching. The thread for hand sewing shall be type III, class 3, size C, 2-ply of V-T-301.

3.3.7.2 Cotton thread. The cotton thread shall conform to V-T-276, type IC2 mercerized finish, ticket No. A, 3-ply for all inside seaming and stitching. The thread for basting shall be a good commercial grade.

3.3.7.3 Color and colorfastness. All thread shall be black AA, Cable No. 66043, (See DOD Standard Color Card of Official Standardized Shades for Sewing Threads 1968) except cotton thread for basting which may be white. The colored threads, when tested as specified in the applicable thread specification, shall show good fastness to wet (dry) cleaning and, in addition, the silk thread shall show good fastness to light.

3.3.8 Collar closure hook and eye. The hook and eye for closing the collar shall be brass thoroughly and completely clear lacquered over a black chemical finish in accordance with MIL-F-495 and shall conform to the requirements shown in Figure 1. All surfaces and edges of the hook and eye shall be clean, smooth, free from burrs, tool marks, sharp edges, and roughness. The dry lacquer film shall be continuous, level, adherent, free from lint, dust, or other foreign inclusions that may affect appearance or serviceability, and shall withstand the test for tackiness specified in section 4, Table IV. All apertures of the finished lacquered hook and eye shall be completely open and free of any lacquer film.

Source: https://assist.dla.mil -- Downloaded: 20260-19T17:04Z
Check the source to verify that this is the current version before use.

NOTE: A hook and eye shall be furnished with each collar but shall not be sewn to the collar. The hook and eye shall be placed in a paper envelope with a string attached and tied to the collar through an eyelet.

3.3.9 Combination identification and size marking. A combination identification and size marking shall be applied to each collar by heat transfer (decalcomania), direct printing or stamping. The marking shall conform to type III or type IV, class 4 of DDD-L-20, except the content shall include the Name of Contractor and the marking medium shall be of a contrasting color to the lining material. The collar is intended to be dry cleaned.

NOTE: Size of characters for Name of Contractor shall be minimum 6 point (approximately 1/16 inch).

3.4 Design. The collar shall be the U. S. Marine Corps design shown on Figure 2 (see 6.5). It shall be a stand-up collar with a single hook and eye for front closure. The top and bottom edges shall be piped with scarlet wool broadcloth.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard pattern shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size, directional lines for cutting, and are marked for proper placement and assembly of the component parts. Patterns provide for 1-3/4 inch and 2-inch finished width collars.

3.5.1 Pattern parts. The collar shall be cut from specified materials in accordance with the number of parts indicated below:

Pattern nomenclature

Item	Material; cloth, polyester/wool, gabardine	No. of Cut parts
1.	Collar (Outer ply)	1
	Material; cloth, rayon lining	
2.	Collar Lining	1
3.	Collar Eyelet covers	2
	Material; cloth, buckram, cotton	
4.	Collar Interlining	1

Source: https://assist.dla.mil --Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

3.6 Construction. The collars shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. The collars shall be furnished unfinished. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the collars.

3.6.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicate the minimum and maximum number permitted. Ends of all seams and stitching produced with 301-type stitch, when not caught in other seams or stitching, shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut collar in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by directional lines on the patterns. NOTE: Straight of cloth refers to the warp direction. c. Cut the polyester/wool gabardine parts of the collar from one piece of basic material. The binding for upper edge of collar interlining shall be cut 1 inch wide. d. The rayon lining parts for the eyelet covers may be cut from ends. When pairs of eyelet covers are cut from ends, the shade of the covers shall match each other. e. Cut polyester and cotton reinforcement pieces for collar eyelets not less than 2 inches long and 1-3/4 inches wide. Cut the polyester and cotton binding for the lower edge of collar interlining on the straight, 1 inch wide. f. Cut the cotton buckram for interlining the collar on the straight in accordance with the patterns furnished. g. Cut the cotton felt, for padding the collar 1-1/4 inches wide and sufficiently long to fold over the ends of the interlining for each size collar.					

Source: https://assist.dla.mil -- Downloaded: 20260-19T17:04Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. (cont'd)					
	h. Cut the scarlet wool broadcloth for piping the edges of the collar on the straight, 5/8 inch wide.					
2.	Replacement of damaged parts.					
	a. Replace, at time of cutting, any part containing damages such as holes or seriously weakening defects such as smashes, multiple floats, and slubs likely to develop into a hole.					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor, or knife cuts, tears, holes, mends, or burns.					
3.	Size and shade marking.					
	a. Attach a size ticket to the outer ply, lining and interlining of the collar, to insure the proper assembly of parts.					
	b. Mark or ticket all component parts cut from one piece of wool or rayon lining material, including the collar eyelet covers when cut from ends, to insure uniform shade throughout the collar.					
	c. When tickets are used for size or shade marking, the tickets shall be of a type having a non-corrosive metal fastening device or shall be an adhesive type ticket which shows no discoloration or leaves no adhesive mass adhering to the material upon removal of the ticket.					

Source: https://assist.dla.mil -- Downloaded: 20261-19T17:04Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3.	Size and shade marking. (cont'd)					
	d. The use of tickets with metal fastening devices is prohibited on the rayon lining.					
4.	Make collar eyelet cover.					
	Finished appearance. The collar eyelet covers shall finish 1-3/4 ± 1/8 inches wide.					
	a. Turn under the side edges of the cover and stitch 1/8 inch from the folded edges, catching the turned under portions in the stitching.	301	Efa-1 (each side edge)	10-14	A	A
	b. Fold each cover in half across the width and seam 1/16 inch from the folded side edges. Continue stitching across the folded end.	301	SSc-1 (each side edge) OSf-1 (folded end)	10-14	A	A
5.	Assemble collar interlining.					
	Finished appearance. The collar interlining shall be bound at the top edge with 1-inch-wide strip of basic material and at the lower edge with 1-inch-wide strip of polyester and cotton. The binding shall be uniformly stitched 1/4 inch from the folded edges. The binding shall not be tight or full causing puckers, gathers, or pleats. The interlining and edges of the binding shall be securely caught in the stitching. The interlining shall finish with the eyelet reinforcement pieces positioned on					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Assemble collar interlining. (cont'd)					
	the inside and the felt padding positioned on the outside of the interlining. The collar eyelet cover shall be positioned so that in the finished collar, the covers shall be centered over the eyelets.					
	a. Position the eyelet reinforcement at each end of the collar interlining. Bind each edge of the interlining, catching the reinforcements in the seams.	301	BSa-1	10-14	A	A
	b. Center the strip of felt padding on the outside of the collar interlining with the ends of the padding sufficiently long to fold over each end of the interlining. Seam the padding to the interlining from end to end 1/8 inch from top and bottom edges, respectively, of the padding.	301	SSau-2	10-14	A	A
	c. Lap the raw edge of the collar eyelet covers 1/2 to 5/8 inch on the top inside edge of the collar interlining. Seam the covers to the interlining 1/4 inch from the raw edge of the covers.	301	LSa-1	10-14	A	A
6.	Pipe outer ply of collar.					
	Finished appearance. The piping shall extend the full length along both edges of the outer ply and shall be uniformly stitched without twists, gathers, puckers, or pleats.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6.	Pipe outer ply of collar. (cont'd)					
	a. Seam a 5/8-inch-wide strip of scarlet piping to the outer ply 1/8 inch from upper and lower edges.	301	SSe-2	10-14	A - or - A (silk)	A A
	b. Turn back the piping and outer ply at upper and lower edges, uniformly working the folded edge of the piping 1/8 inch beyond the edge of the outer ply. Topstitch the outer ply uniformly 3/16 inch from the folded edges of the piping.	301	BSm-3 (b)	10-14	A (silk)	A
	- or -					
	c. Fold the scarlet piping, slightly offsetting the raw edge and seam as above.	301	SSav-2 (a)	10-14	A - or - A (silk)	A A
	- or -					
	d. Turn the back edge of collar and stitch through outer ply 1/16 inch from edge, leaving the folded edge of the slightly offset folded edge of the scarlet piping extending 1/8 inch beyond edge of outer ply.	301	BSm-3 (c)	10-14	A - or - A (silk)	A A
7.	Assemble collar.					
	Finished appearance. The collar shall be assembled without twists, gathers, puckers, pleats, or other distortions. The eyelets shall be well worked with the purling on the outside of the collar and shall finish with a 1/8 inch diameter opening.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Assemble collar. (cont'd)					
	a. Position the outer ply on the outside of the interlining assembly with the basic material on the top edge of the interlining extending uniformly 1/8 inch beyond the piping on the top edge of the outer ply. Polyester/cotton binding at the bottom edge of the interlining shall not be exposed beyond the piping on the bottom edge of the collar.					
	b. Seam the outer ply and interlining assembly together with a row of stitches as close as possible to, but not on top of, the topstitching at upper and lower edges of the outer ply.	301	SSa-1	10-14	A (silk)	A
	c. Lap the top inside edge of the collar assembly on approximately 1/2 inch of the top edge of collar lining. The face side of the lining shall be up and the right and left ends of the lining shall extend approximately 1/2 inch and 2-1/2 inches beyond the right and left ends, respectively, of the collar assembly.					
	d. Seam the collar assembly to the lining with a row of stitches as close as possible to, but not on top of, the rows of stitches at the upper edge of the collar. The stitching shall extend from center to center of the eyelet covers.	301	LSa-1	10-14	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Assemble collar. (cont'd)					
	e. Smoothly fold the ends of the outer ply to the inside over the ends of the interlining and press smooth and flat with a heated pressing iron or pressing machine.					
	f. Turn collar lining at the seam to the inside of the collar and press smooth and flat with a heated pressing iron or pressing machine.					
	g. Make one eyelet through all plies midway ± 1/16 inch of inner edges of piping and 1-1/2 ± 1/8 inches from each finished end of collar.	Eyelet		20 per eyelet (minimum)	A (silk)	A
8.	Make collar extension tab.					
	Finished appearance. The extension tab shall extend 3/4 to 7/8 inch beyond the folded edge at the left end of the collar.					
	a. Turn the top and bottom edges and the end of the collar lining at the left end of the collar to the inside of the lining and baste the turned portion along the top, front, and bottom edges to the body of the lining forming the collar extension tab.	Hand				
	b. Stitch the collar extension tab 1/16 inch from the top, front, and bottom edges and continue the stitching at the back of tab to top row, forming a 1-1/8 inch-wide box stitch.	301	SSc-1 (top and bottom edge) OSf-1 (front edge) SSa-1 (back edge)	10-14	A	A

Source: https://assist.dla.mil --Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Fell ends of outer ply to collar. Finished appearance. The upper and lower edges at each end of the outer ply shall not be visible in the finished collar. a. Tack the ends of the outer ply to the eyelet reinforcements and eyelet covers with overcast stitching.	Hand		2-3	C (silk)	
10.	Mark collar. a. Mark the lining side of each collar at the center back as specified in 3.3.9. - or - b. Collar interlining may be marked at center of interlining with indelible ink stamp so it is readily visible when lifting collar lining.					
11.	Clean and press collar. Finished appearance. The collar shall be clean and well pressed. a. Pull all basting threads. Trim all ends of stitching, and remove all loose ends of thread from the collar. Remove all spots, stains and tickets from the collar, with the exception of one ticket on the outer ply, without injury to the material. b. Press the entire collar smooth and flat with a heated pressing iron, or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:04Z
Check the source to verify that this is the current version before use.

3.7 Collar measurements. The collar designated for wear with each size coat shall conform to the width/length measurements shown in Table II (see 6.2).

Table II. Width/Length measurements 1/

Coat sizes (S, R, S, XL)	(Collar width = 1-3/4 ins) Collar length (inches) 2/	(Collar width = 2 ins) Collar length (inches) 2/
30	14-1/2	14-1/2
32	15	15
33	15-1/4	15-1/4
34	15-1/2	15-1/2
35	15-3/4	15-3/4
36	16	16
37	16-1/4	16-1/4
38	16-1/2	16-1/2
39	16-3/4	16-3/4
40	17	17
41	17-1/4	17-1/4
42	17-1/2	17-1/2
43	17-3/4	17-3/4
44	18	18
46	18-1/2	18-1/2
48	18-3/4	18-3/4

1/ Tolerance on finished length: ±1/4 inch. Tolerance finished width: ±1/8 inch.
2/ Collar length measurement shall be taken along the center from end to end.

3.8 Workmanship. The collars shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed those established by the applicable acceptable levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all

Source: https://assist.dla.mil -- Downloaded: 202640-19T17:04Z
Check the source to verify that this is the currentversion before use.

requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certification of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated collar for all provisions of this specification. The contracting officer should specify the type of first article and the number of units to be tested.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specification and standards to the extent applicable, expect that this specification shall govern in the event of conflict. The method of testing will be as specified in FED-STD-191, wherever applicable. Inspections are classified as group A, non-destructive.

4.5.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with Table III. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. The unit for expressing lot sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specifications and as follows:

Component	Lot Size	Sample Unit for Testing
Cloth, Buckram	Yards	1/4 yard full width
Laminated Cloth	Yards	2-1/2 yards full width
Closure Hook & Eye	100 each	2 each, hook & eye
Padding	Yards	1/4 yard full width
Thread	Bobbins (when used) 1/	Sufficient number of bobbins to total a minimum of 360 yards.

1/ When threads are purchased in the form of cones or spools and on bobbins, threads for each shall be tested.

Source: https://assist.dla.mil -- Downloaded: 202640-19T17:04Z
Check the source to verify that this is the current version before use.

Table III-Sample Size

Lot Size	Sample Size
800 or less	2
801 up to 22,000 inclusive	3
22,001 and over	5

4.5.1.2 In-process inspection. Inspection will be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are performed as specified. The Government reserves the right to exclude from consideration for acceptance any material or services for which in-process inspection has indicated nonconformance.

4.5.2 Examination of the end item. The classification of defects found during examination shall be in accordance with 4.5.2.2, 4.5.2.3, and 4.5.2.4.

4.5.2.1 Classification of defects. All defects shall be classified as indicated below, except those with an asterisk (*) in classification column, which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When affecting appearance or serviceability, but not seriously.

4.5.2.2 General defects. General defects shall be classified as follows:

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Material defects and damages.	a. Any hole.	*		
	b. Any weakening defect such as smash, multiple float, loose slub, etc., that may develop into a hole.	*		
	c. Shade bar, unsightly slub, etc., on outside.	*		
	d. Needle chews which may develop into a hole.	*		
	e. Scissors or knife cut, tear, mend, burn.	*		
	f. One or more exposed drill holes.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Material defects and damages. (cont'd)	g. Ruptured fibers in the line of sewing (usually caused by broken, blunt, or hooked needle) affecting appearance.		X	

NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or non-weakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:

Material defect - No defect.
Workmanship damages - Minor B.

Shaded parts	a. Binding (basic material) on upper edge of collar badly shaded, affecting appearance.		X	
	b. Scarlet piping on top and bottom edges of collar not matching each other in shade, affecting appearance.		X	
	c. Eyelet covers not matching each other in shade.			X
Cleanness	a. Any spot or stain clearly noticeable: - on outside. - on inside.	X		 X
	b. Thread ends not trimmed or loose threads not removed on major portion of collar.			X
Components and assembly (Unless otherwise classified herein):	a. Any defective component.	*		
	b. Any component part omitted.	*		
	c. Any required operation omitted or improperly performed.	*		
Cutting	a. Basic material not cut in accordance with directional lines on patterns or in accordance with specification.	X		

Source: https://assist.dla.mil -- Downloaded: 20261O-19T17:04Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Cutting (cont'd)	b. Polyester/cotton binding or collar interlining cut on the bias.		X	
	c. Scarlet wool broadcloth for piping, cut on the bias.		X	
	d. Collar lining not cut in accordance with directional lines on patterns.		X	
Pressing	a. Burned or scorched.	*		
	b. Pressing omitted or collar not pressed smooth and flat, affecting appearance.		X	
Seams and stitching	a. General:			
	1. Seams twisted, puckered, or pleated affecting appearance.		X	
	2. Part of collar caught in any unrelated operation or stitching, affecting appearance or serviceability.	*		
	3. Wrong shade or two shades of thread used on outside of collar, affecting appearance.		X	
	4. Thread breaks or ends of all stitching (when not caught in other seams or stitching) not securely backstitched.		X	
	b. Gage of stitching (top or raised stitching):			
	1. Irregular, i.e., unevenly gaged, or various stitchings not uniform, affecting appearance (to be scored only when the condition exists on major portion of seam).		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Seams and stitching (cont'd)	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.		X	
	c. Open seams: Any seam open by: - 3/16 inch or more but not more than 1/2 inch.		X	
	- more than 1/2 inch.	X		
	- 1/8 inch or more but less than 3/16 inch.			X
	d. Raw edges: Any raw edge: - 1/8 inch or more but not more than 1/4 inch.		X	
	- more than 1/4 inch.	X		
	- less than 1/8 inch.			X
	e. Run-offs: 1. Joining seams - when resulting in an open seam use "Open Seam" classification.			
	2. Top stitching (When not resulting in open seam): Outside: - more than 1/2 inch.		X	
	- more than 1/4 inch but not more than 1/2 inch.			X
	f. Seam and stitch type: 1. Wrong seam type.		X	
	2. Wrong stitch type.		X	
	g. Stitch tension: 1. Loose tension, resulting in a loose seam.	x		

NOTE: One or more broken stitches or two or more continuous skipped or run-off stitches on joining seams, or hand felling constitutes an open seam.

NOTE: Raw edges not securely caught in stitching shall be classified as an open seam.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T17:04Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Seams and stitching (cont'd)	2. Loose tension on top or raised stitching resulting in loosely exposed bobbin thread or top thread.		X	
	3. Tight tension (stitches break when normal strain is applies to seam or stitching.)	X		
	h. Stitches per inch to be scored only when the condition exist on major portion of seam):			
	1. One stitch less than minimum specified.			X
	2. Two stitches less than minimum specified.		X	
	3. Three or more stitches less than minimum specified.	X		
	i. Stitches skipped or broken (on top stitching when seam is seamed, turned, and stitched):			
	1. More than 1/2 inch.		X	
	2. 1/4 inch or more but not more than 1/2 inch.			X
Eyelets	a. One or both omitted or one or more added.	X		
	b. Wrong type.		X	
	c. Eyelet stitching not securely caught in fabric, causing stitching to pull away from fabric.	X		
	d. Diameter of eyelets (inside openings): - less than 1/8 inch or more than 1/4 inch in diameter.			X

NOTE: Puckering is evidence of tight tension. When puckering is evident, the inspector shall test seam by exerting pull in the lengthwise direction of seam.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Eyelets (cont'd)	e. One or both eyelets uncut.		X	
	f. Incompleted stitching in one or both eyelets.		X	
	g. One or more broken stitches: - in 1 eyelet. - in 2 eyelets.	 X	X	
	h. More than two skipped stitches: - in 1 eyelet. - in 2 eyelets.		 X	X
	i. Purling not finishing on outside of collar.			X
	j. One or both eyelets not constructed through all plies of finished collar.		X	
Hook and eye	a. One or both omitted.	X		
	b. Not specified type or size.		X	
Collar	a. Interlining omitted.	X		
	b. Interlining tight or twisted causing puckers on collar, affecting appearance.		X	
	c. Felt padding omitted.		X	
	d. Felt padding stitched to interlining with less than two rows of stitching or positioned on the inside of interlining.			X
	e. Binding at top edge of interlining extending less than 1/16 inch or more than 3/16 inch beyond top edge of piping.		X	
	f. Binding at top edge of interlining other than specified basic material.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

EXAMINE	MIL-C-23486B(MC) DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Collar (cont'd)	g. Piping at top and bottom edges of collar, irregular in width, affecting appearance.		X	
	h. Polyeser/cotton binding at bottom edge of interlining omitted, or exposed beyond bottom edge of piping, affecting appearance.		X	
	i. One or both stay pieces for reinforcing eyelets omitted.			X
	j. Center of eyelets from finished ends of collar: - less than 1-3/8 inches but not less than 1-1/4 inches.			X
	- More than 1-3/4 inches but not more than 1-7/8 inches.			X
	- Less than 1-1/4 inches or more than 1-7/8 inches.		X	
	k. Eyelets out of alignment by more than 1/8 inch when collar is fastened.		X	
	l. Eyelets off-center with inner edges of piping by 1/16 inch or more.	X		
	m. Finished width of collars: Nominal width: 1-3/4 inches - less than 1-5/8 inches but not less than 1-1/2 inches.			X
	- More than 1-7/8 inches but not more than 2 inches.			X
	- less than 1-1/2 inches or more than 2 inches.		X	
	Nominal width: 2 inches - less than 1-7/8 inches but not less than 1-3/4 inches.			X
	- more than 2-1/8 inches but not more than 2-1/4 inches.			X
	- less than 1-3/4 inches or more than 2-1/4 inches.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:04Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Collar (cont'd)	n. Collar irregular in width by 3/16 inch or more, affecting appearance.		X	
	o. Front finished ends of collar uneven in width by 1/8 inch or more.		X	
	p. Upper or lower edges of outer ply on one or both ends of collar, exposed affecting appearance.		X	
	q. One or both ends of outer ply not tacked to eyelet reinforcement and eyelet covers.		X	
Collar Lining	a. Extension tab on left end of collar omitted.		X	
	b. Extension tab extending less than 3/4 inch or more than 7/8 inch from finished end of collar.			X
	c. Top or bottom edge of extension tab exposed when collar is fastened, affecting appearance.			X
	d. One or more rows of stitching forming box stitch on extension tab omitted.			X
	e. Row of stitching at back of tab forming box stitch less than 1-1/4 inches from folded end of tab.			X
Eyelet Covers	a. One or both covers, omitted.		X	
	b. One or both covers not covering eyelet.			X
	c. Width of 1 or both covers less than 1-5/8 inches or more than 1-7/8 inches wide.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Size Ticket	a. Size ticket omitted on outer ply of collar.		X	
	b. Size shown on marking medium not in conformance with size shown on ticket.			X
Identification and size marking (combined)	a. Missing, incorrect, or illegible.		X	
	b. Size shown on the marking medium not in accordance with size shown on intermediate or outer containers as applicable.			X
	c. Not located on lining at center back of collar or on center back of interlining.			X
	d. Color or marking not in contrast with color of rayon lining.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

4.5.2.4 Measurements. Collar length measurements deviating from nominal dimension and tolerance included in Table II shall be scored as a size measurement defect.

4.5.3 Inspection of packaging. An examination will be made to determine compliance with packaging, packing, and marking requirements of this specification. Defects will be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to the closing operation. Defect of closure listed below will be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as: Incomplete closure of case liners, container flaps, loose strapping, inadequate stapling, bulging, or distortion of containers.
Content	Number per bundle or container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

4.6 Tests. The method of testing specified in FED-STD-191, wherever applicable and as listed in Table IV shall be followed.

Table IV - Test methods

Component	Characteristic	Rqmt. Para.	Test Method	Det.Per S/Unit	Results Rptd. As
Cloth Buckram	Material Indentification	3.3.4	1200 1/	1	Pass or Fail
	Weave	3.3.4.2	Visual	1	Pass or Fail
	Yarns/inch:				
	-Warp	3.3.4.3	5050	5	(To the near
	-Filling	3.3.4.3	5050	5	est whole number)
	Ply	3.3.4.3	Visual	1	Pass or Fail
Laminated Cloth	Resistance to:				
	-wet-dry cleaning	3.3.4.4	5622 2/	1	(No evidence
	-accelerated aging	3.3.4.4	5850 3/	1	of delamina-
	-perspiration	3.3.4.4	5682 4/	1	tion)
	Odor	3.3.4.4	1/		
	Finish	3.3.4.4.1	1/		
	Stiffness:				
	origianal-warp	3.3.4.4.1	5202 5/	10	(To the near
	-filling	3.3.4.4.1	5202 5/	10	est 0.001 inch-pound)
	after wet-dry cleaning				
	-warp	3.3.4.4.1	(5622 2/	10	"
	-filling	3.3.4.4.1	(& 5202 5/	10	"
	after accelerated aging				
	-warp	3.3.4.4.1	(5850 3/	10	"
	-filling	3.3.4.4.1	(& 5202 5/	10	"
	after perspiration				
	-warp	3.3.4.4.1	(5682 4/	10	"
	-filling	3.3.4.4.1	(& 5202 5/	10	"
	Weight	3.3.4.4.2	5041	5	To the nearest o.1 oz.
	Breaking strength				
	original -warp	3.3.4.4.3	5100	5	To the nearest 1.0 lb.
	-filling	3.3.4.4.3	5100	5	
	after accelerated aging				
	-warp	3.3.4.4.3	(5850 3/&5/		To the nearest 1.0 lb.
	-filling	3.3.4.4.3	(&5100		
Padding, Felt	Material Identification	3.3.5	1200 1;	1	Pass or Fail
	Weight	3.3.5	5041	5	To the nearest 0.1 oz.
Closure Hook	material Identification	3.3.8	1/		
	Finish	3.3.8	Std. Comm'l	1	Pass or Fail
	Tackiness	3.3.8	4.6.1	1	Pass or Fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

1/ This requirement shall be accepted on the basis of the contractor's Certificate of Compliance.
2/ Except that the material shall be subjected to three wet-dry cleaning cycles.
3/ Except that the aging process shall be limited to five hours at a temperature of 100°C,
4/ Except that the material shall be immersed in the perspiration solutions for 20 minutes and then air dried.
5/ Using a moment-weight of one pound.
Reason: 1) Standardization of format
2) Consolidation of related requirements (laminated cloth)
3) Deletion of characteristics which are a Quality Control Representative's (design, measurement).
4) Inclusion of requirements which have been omitted (ply)
5) Simplification of footnotes
6) Nomenclature correction (Texture to yarns/inch)

4.6.1 Test for tackiness. At room temperature (60° to 80°F) press a piece of tissue paper against the lacquered surface for 30 seconds, using any pressure capable of being exerted by the thumb and two fingers. The tissue shall not adhere to the lacquered surface, but shall fall free when pressure is released.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Collars shall be neatly stacked and tied into bundles at the center and at each end with strong twine or cotton tape. Each bundle shall contain 25 collars of one size and width only.

5.1.2 Commercial. Collars shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B, or commercial, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Seventy-five (75) collars of one size and width only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with lining conforming to Type CF, class-weather resistant, variety DW, grade W15C and lining 200, size 2A, of MIL-B-17757. The contents of each shipping container shall be completely covered on top and bottom with 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled, closed, and reinforced as specified in the appendix to MIL-B-17757.

5.2.1.1 Method 2. When specified, six level B shipping containers (450 collars of one size and width only) shall be overpacked in a fiberboard shipping container conforming to Type CF, class-weather resistant, variety SW, grade W5C, size No. 4 of MIL-B-17757; assembled and closed as specified in the appendix thereto.

Source: https://assist.dla.mil -- Downloaded: 202640-19T17:04Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Seventy-five (75) collars of one size and width only, packaged as specified in 5.1, shall be packed in fiberboard shipping container with liner conforming to Type CF, class-domestic, variety DW, grade 275 and lining 200, size No. 2A of MIL-B-17757: the fiberboard used in fabricating the container and liner shall be assembled, closed, and reinforced as specified in the appendix thereto. The contents of each shipping container shall be completely covered on top and bottom with 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268.

5.2.3 Commercial. Collars, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, U.S. Postal Service Manual, or regulations of other carriers applicable to the mode of transportation.

5.3 Palletization. When specified (see 6.2), collars, packed as specified in 5.2. shall be palletized on a 4-way entry pallet in accordance with load type 1a of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type I, Class 1, Style 1, Size A, Wood Group I, II, III, or IV of MIL-P-15011, or, 4-way, Type IV, V, or VIII, Class 1, Style A, Size 2, Wood Group I, II, III, or IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The collar described herein is intended to be worn on the Coat, Man's; Gabardine; Blue; by male personnel of the U.S. Marine Corps.

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number, and date of the specification.
(b) Size and width required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Selection of applicable levels of packing (see 5.2).
(e) When palletization is required.

6.3 Sample and shade samples. For information regarding availability of samples of collars and of the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 202640-19T17:04Z
Check the source to verify that this is the currentversion before use.

6.4 Large collar size. For information regarding collar sized corresponding to coats larger than size 46, address inquiry to the procuring activity issuing the Invitation for Bid.

6.5 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall control. Figure 2 shows finished collar although the collars shall be furnished unfinished.

6.6 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209 and the requirements of this specification. The samples(s) presented for inspection may be first articles, preproduction samples, first production or sample(s) taken from the first lot depending on the contractor history and will be as directed by the Contracting Officer. The Contracting Officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.7 Subject term (keyword) listing

Blue
Collar
Man's
Polyester/wool

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202640-19T17:04Z
Check the source to verify that this is the current version before use.

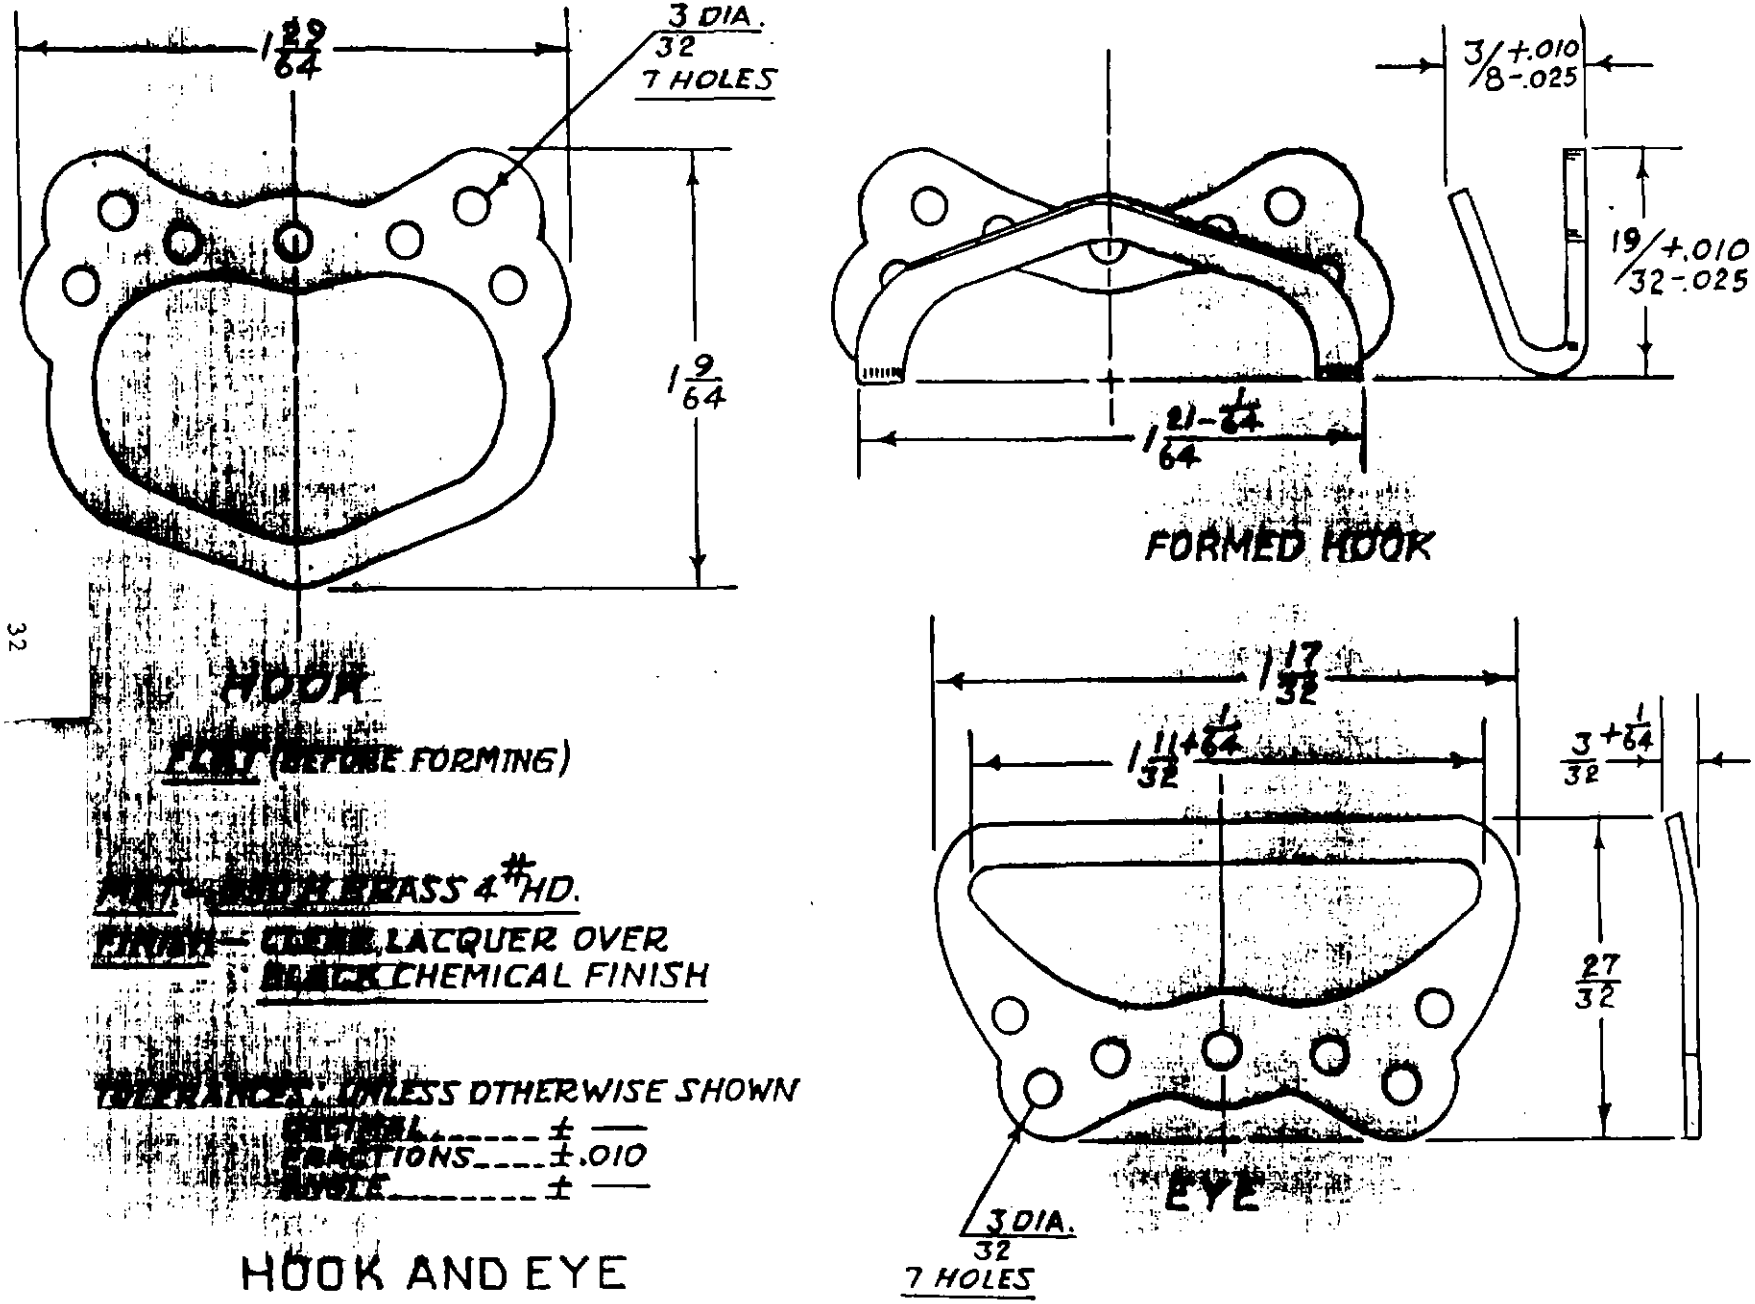


FIGURE 1. COLLAR: FOR COAT, MAN'S: POLYESTER/WOOL, GABARDINE, BLUE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

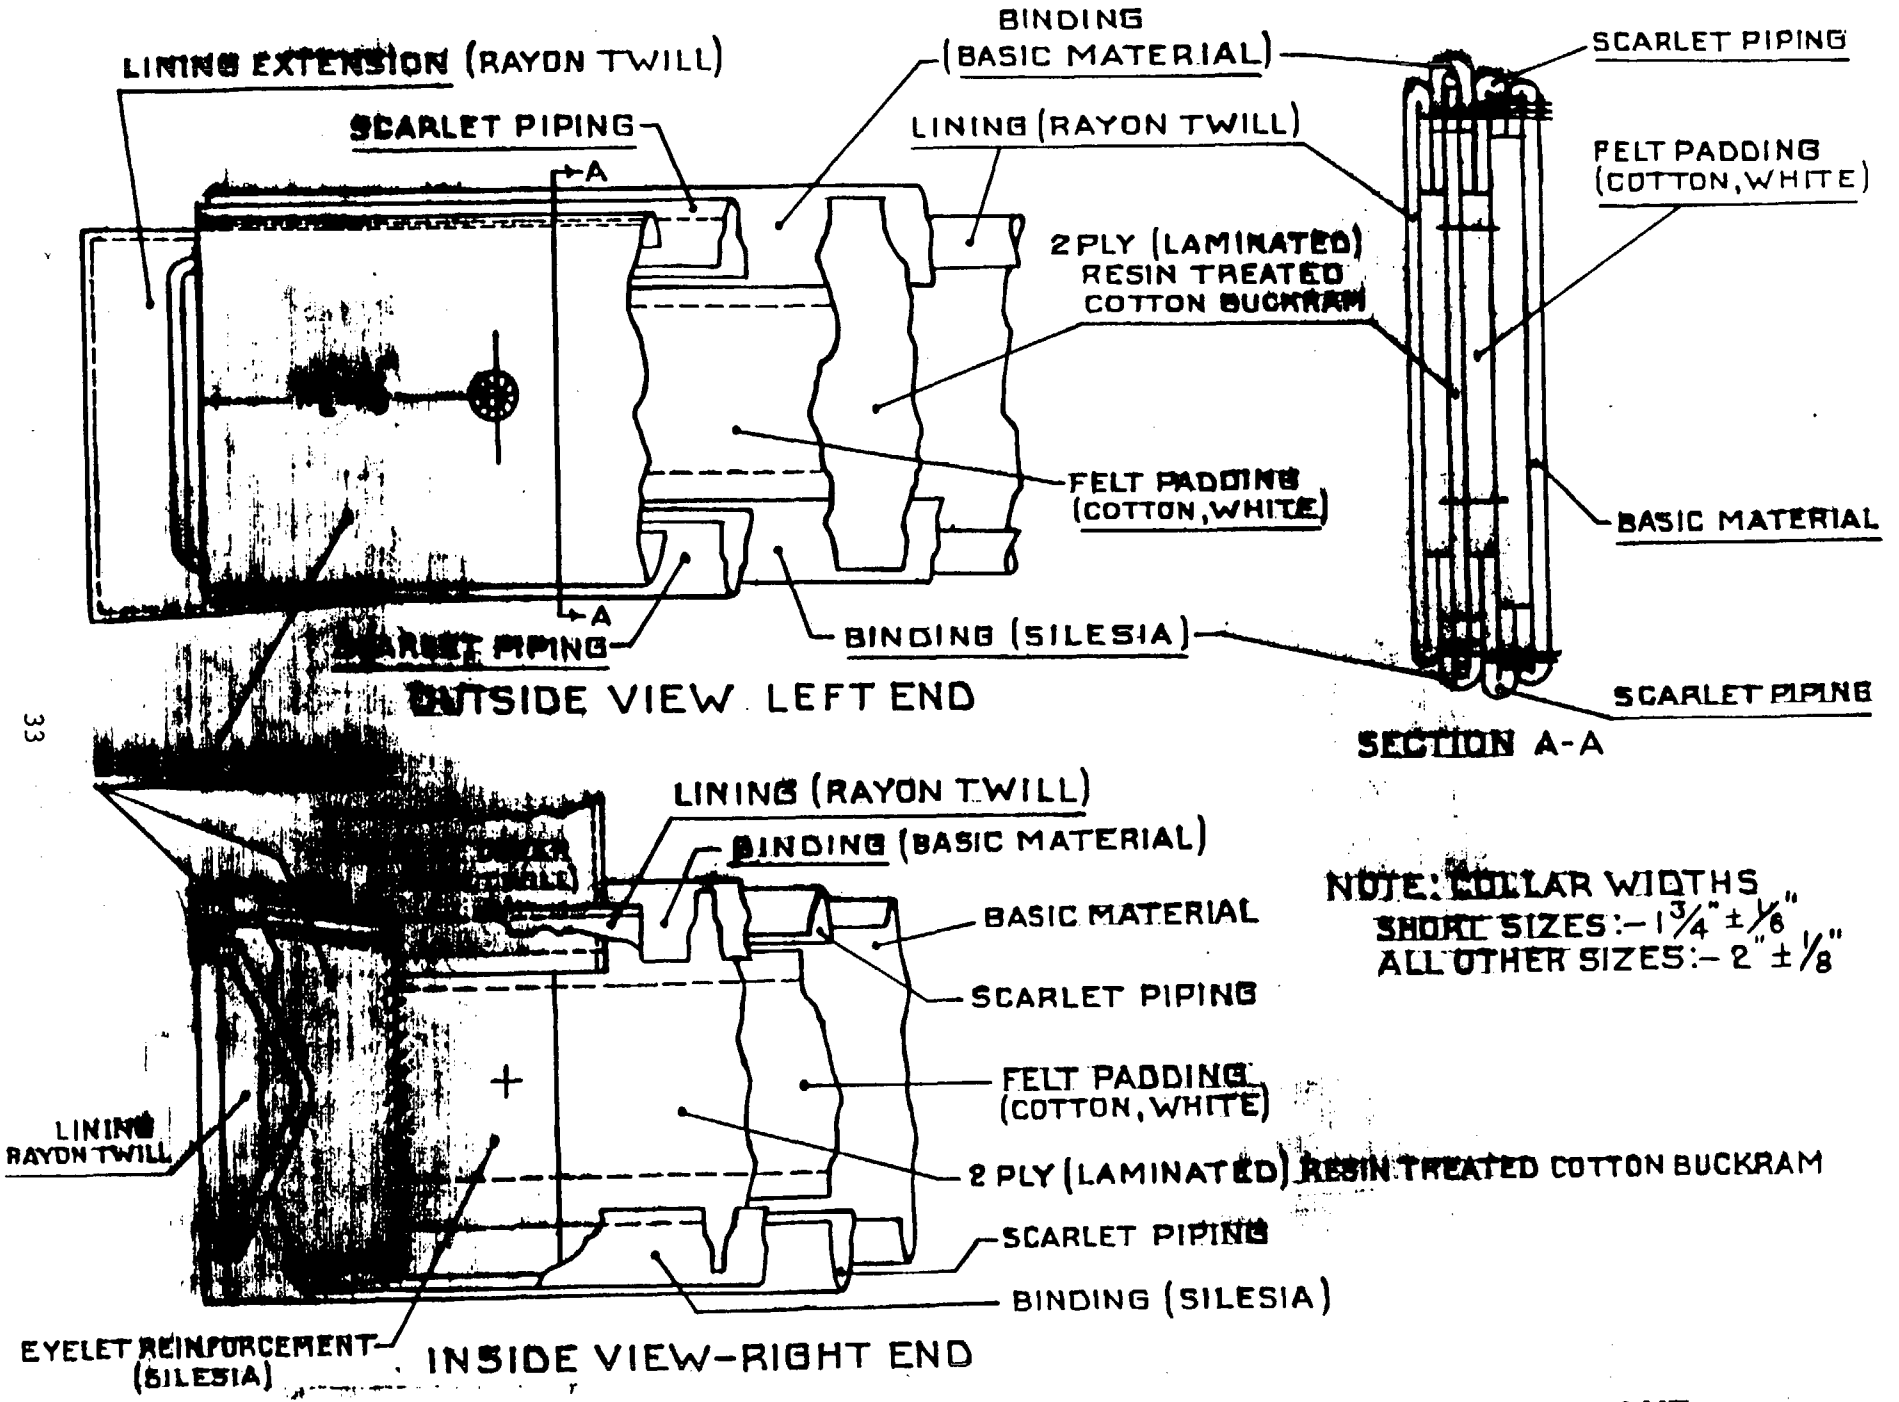


FIGURE 2. . COLLAR: FOR COAT, MAN'S: POLYESTER/WOOL, GABARDINE, BLUE

Source: https://assist.dla.mil -- Downloaded: 202640-19T17:04Z
Check the source to verify that this is the current version before use.

Preparing activity
Navy - MC
Project No. 8315-N315

Source: https://assist.dla.mil -- Downloaded: 202640-19T17:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-23486B(MC)	COLLAR, COAT, MAN'S: POLYESTER/WOOL GABARDINE, BLUE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding General
Marine Corps Research, Development
and Acquisition Command, Code PSE-C
Washington, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:04Z
Check the source to verify that this is the current version before use.