INCH-POUND

MIL-D-23523D(SH)
AMENDMENT 1
5 April 1993

MILITARY SPECIFICATION SHEET

DEHYDRATOR, LOW PRESSURE AIR,
FOR SPECIAL APPLICATIONS

This amendment forms a part of Military Specification MIL-D-24693D, dated 23 November 1987, and is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

Under MILITARY (Continued): Add

"MIL-T-55164 - Terminal Boards, Molded, Barrier Screw and Study Types, and Associated Accessories, General Specification for

PAGE 5

3.4 Delete second sentence and substitute, "Dehydrators shall be shipboard deck mounted and shall have mounting interface as detailed on figure 1."

AMSC N/A FSC 4460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.

PAGE 9

3.6.5.2 In second sentence, delete "moisture influent conditions (80 lb/in^2 pressure and saturated at 105°F)" and substitute "influent air temperature and moisture content (see 3.7.5)".

PAGE 12

3.6.9.2 In second from the last sentence, delete "120°F (49 degrees Celsius (°C))" and substitute "250°F (121 degrees Celsius (°C))".

PAGE 14

3.6.11.2 Delete subelement (1) entirely--it duplicates 3.6.20.

PAGE 20

Table II Type II influent air maximum temperature:
delete "105" and substitute "120".
Type II influent air maximum moisture content:
delete "0.008" and substitute "0.003 (80°F dew point at 80 psig)".

PAGE 21

3.8.2 Delete "piping and sizes" and substitute "piping, sizes and locations". Delete "as specified (6.2.1)" and substitute "as detailed in figure 1."

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.

PAGE 23

4.4 Add subelement (j): Electromagnetic Interference (4.7.9).

In fifth from last sentence: Delete "(h) and (i)" and substitute "(h), (i) and (j)". In fourth from last sentence: After "test (h)" insert "and (j)".

PAGE 24

4.7.3.1 In first sentence, delete "saturated inlet air at" and substitute "influent air at maximum moisture content,".

PAGE 25

4.7.3.1 In the third from the last sentence, delete "saturated air at ... minimum pressure." and substitute "air at maximum moisture content, maximum temperature and minimum pressure (see 3.7.5)."

4.7.3.5 Delete entire second sentence and substitute "The dehydrator shall be operated at maximum flow with influent air at the minimum operating pressure, maximum operating temperature and maximum moisture content (see 3.7.5)"

4.7.3.7 Renumber entire paragraph to 4.7.9 and move paragraph to appropriate place in document.

PAGE 29

6.2.1 In subelement (f), delete "(type I)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.

PAGE 32

6.5(j) Delete "(saturated at 105°F, that is, 0.008 lb H_2O/lb of dry air)." and substitute "(80°F dew point, that is, 0.003 lb H_2O/lb dry air, at 120°F sensible temperature)."


6.5(k) In first sentence, delete "of 0.003 lb H_2O/lb of dry air (saturated at 85°F)". Insert new second sentence: "Nominal inlet air moisture content is 0.004 lb H_2O/lb dry air (saturated at 85°F) for Type I dehydrators, and 0.002 lb H_2O/lb dry air (saturated at 65°F) for Type II dehydrators."


PAGE 34

Add new page - FIGURE 1: - Insert the attached figure 1.

Preparing activity:
Navy - SH
(Project 4460-N054)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.

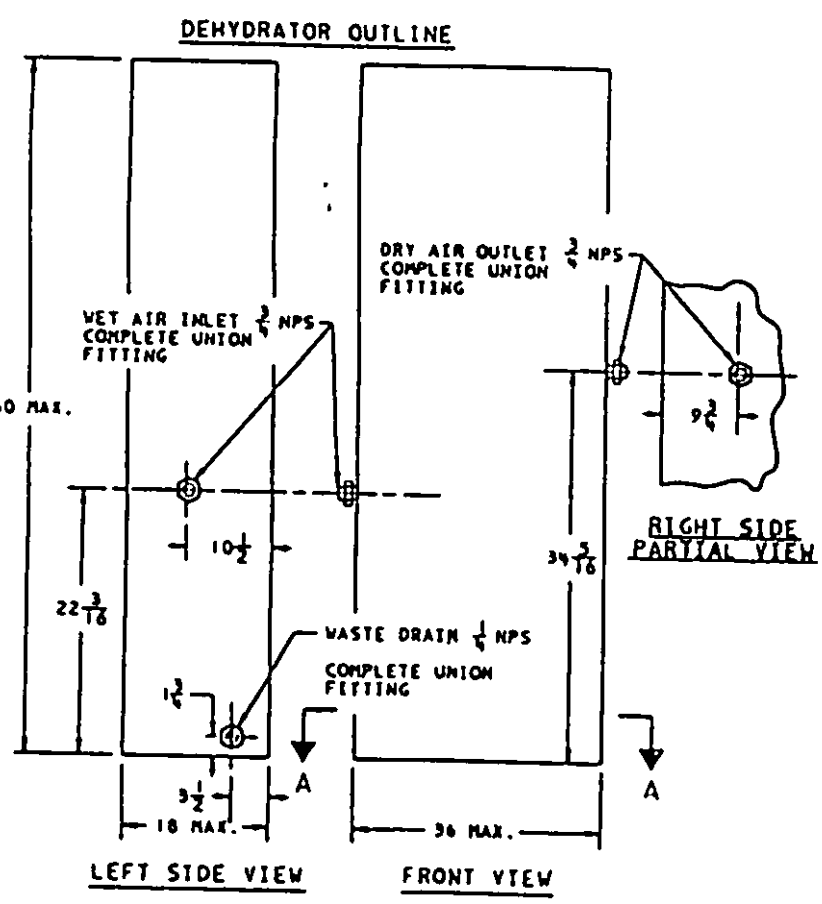

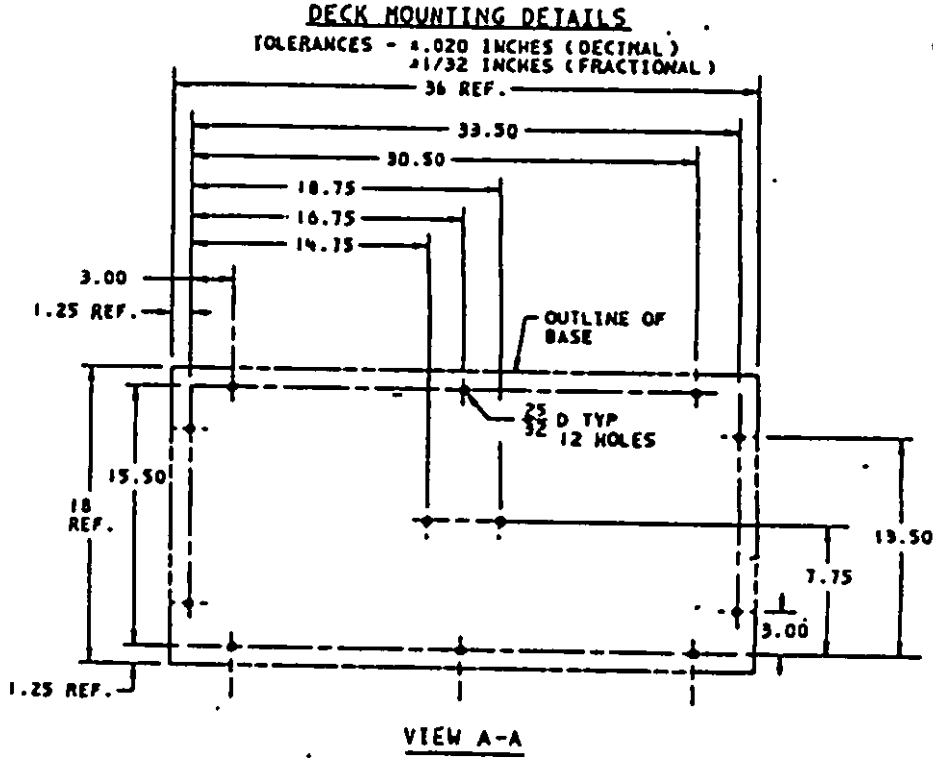

NOTE:
1. ALL DIMENSIONS IN INCHES.
2. THIS DRAWING IS APPLICABLE TO MIL-D-23523

TYPE II L.P. AIR DEHYDRATOR MOUNTING/PIPING INTERFACE 1/88

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.