INCH-POUND

MIL-D-23523D(SH)
AMENDMENT 2
23 February 1996

MILITARY SPECIFICATION

DEHYDRATOR, LOW PRESSURE AIR,
FOR SPECIAL APPLICATIONS

This amendment forms a part of Military Specification MIL-D-23523D(SH) dated 23 November 1987, and is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

Under MILITARY (Continued): Add

"MIL-T-55164 - Terminal Boards, Molded, Barrier Screw and Study Types, and Associated Accessories, General Specification for."

PAGE 5

3.4 Delete second sentence and substitute, "Dehydrators shall be shipboard deck mounted and shall have mounting interface as detailed on figure 1."

AMSC N/A FSC 4460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.

PAGE 7

*3.6.1 Delete "Freon" in the second sentence and insert "refrigerant".

PAGE 8

*3.6.1.1 Delete "Freon" in the first sentence and insert "refrigerant".

PAGE 9

3.6.5.2 In second sentence, delete "moisture influent conditions (80 lb/in^2 pressure and saturated at 105°F)" and substitute "influent air temperature and moisture content (see 3.7.5)".

PAGE 12

3.6.9.2 In second from the last sentence, delete "120°F (49 degrees Celsius (°C))" and substitute "250°F (121 degrees Celsius (°C))".

PAGE 14

3.6.11.2 Delete subelement (1) entirely--it duplicates 3.6.20.

PAGE 16

*3.6.15 Delete "dichlorodifluoromethane (R-12)" in the first sentence and insert "Environmental Protection Agency (EPA) Significant New Alternatives Program (SNAP) approved, with an Ozone Depletion Potential (ODP) of 0.05 or less".

*3.6.15.3 Delete "for R-12" in the fourth sentence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.

PAGE 20

Table II Type II influent air maximum temperature: delete "105" and substitute "120".
Type II influent air maximum moisture content: delete "0.008" and substitute "0.003 (80°F dew point at 80 psig)".

PAGE 21

3.8.2 Delete "piping and sizes" and substitute "piping, sizes and locations". Delete "as specified (6.2.1)" and substitute "as detailed in figure 1."

PAGE 23

4.4 Add subelement (j): Electromagnetic Interference (4.7.9).

In fifth from last sentence: Delete "(h) and (i)" and substitute "(h), (i) and (j)". In fourth from last sentence: After "test (h)" insert "and (j)".

PAGE 24

*4.7.1 Delete "Freon" in the first and fifth sentences and insert "refrigerant".

4.7.3.1 In first sentence, delete "saturated inlet air at" and substitute "influent air at maximum moisture content,".

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.

PAGE 25

4.7.3.1 In the third from the last sentence,delete "saturated air at ... minimum pressure." and substitute "air at maximum moisture content minimum pressure (see 3.7.5)."

4.7.3.5 Delete entire second sentence and substitute "The dehydrator shall be operated at maximum flow with influent air at the minimum operating pressure, maximum operating temperature and maximum moisture content (see 3.7.5)"

4.7.3.7 Renumber entire paragraph to 4.7.9 and move paragraph to appropriate place in document.

PAGE 29

6.2.1 In subelement (f), delete "(type I)".

PAGE 32

6.5(j) Delete "(saturated at 105°F, that is, 0.008 lb H_2O/lb of dry air)." and substitute "(80°F dew point, that is, 0.003 lb H_2O/lb dry air, at 120°F sensible temperature)."

6.5(k) In first sentence, delete "of 0.003 lb H_2O/lb of dry air (saturated at 85°F)". Insert new second sentence: "Nominal inlet air moisture content is 0.004 lb H_2O/lb dry air (saturated at 85°F) for Type I dehydrators, and 0.002 lb H_2O/lb dry air (saturated at 65°F) for Type II dehydrators."

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.


PAGE 34

Add new page - FIGURE 1: - Insert the attached figure 1.

*NOTE: The margins of this amendment are marked with asterisks to indicate where changes from previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - SH
(Project 4460-N063)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.

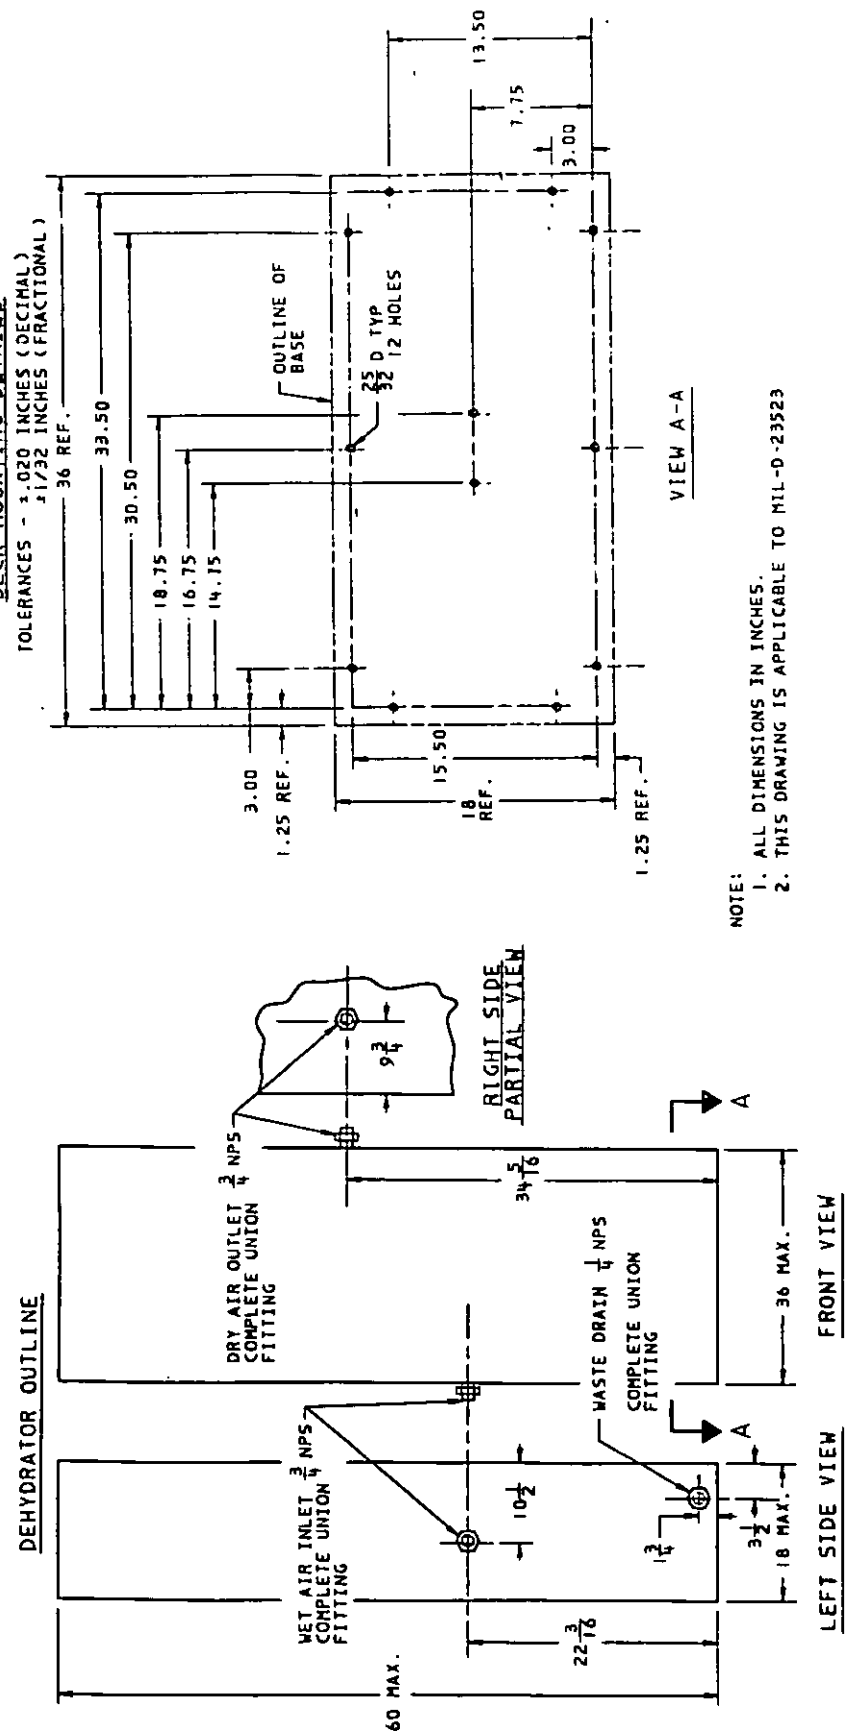

TYPE II L.P. AIR DEHYDRATOR MOUNTING/PIPING INTERFACE

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:08Z
Check the source to verify that this is the current version before use.