GG-T-1837A
January 28, 1975
SUPERSEDING
MIL-T-9967A (USAF)
24 June 1970
GG-T-001837(GSA-FSS)
September 14, 1973

FEDERAL SPECIFICATION

TEMPLATE, DRAFTING FLOWCHART, (AUTOMATIC DATA PROCESSING, FEDERAL INFORMATION PROCESSING SYSTEM)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers Federal Information Processing Standard (FIPS), Automatic Data Processing (ADP), Flowchart Template.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

PPP-B-566 - Boxes, Folding, Paperboard.
PPP B-636 - Boxes, Shipping, Fiberboard.
PPP-B-665 - Boxes, Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676 - Boxes, Setup.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116 - Preservation, Methods Of.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 6675

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American National Standards Institute (ANSI), Inc. Standards:

X3.5 - Flowchart symbols and their usage in information processing.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Agent 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 Riverside Plaza, Chicago, Illinois 60606.)

Technical Association of the Pulp and Paper Industry (TAPPI) Standards:

T-410 - Weight per unit area (basis weight or substance) of Paper and Paperboard.
T-411 - Thickness (caliper) of Paper and Paperboard.
T-511 - Folding Endurance of Paper (MIT Tester).

(Application for copies should be addressed to the Technical Association of the Pulp and Paper Industry, One Dunwoody Park, Atlanta, Georgia 30341.)

3. REQUIREMENTS

3.1 Material.

3.1.1 A clear or light green tinted transparent acrylic, vinyl, polycarbonate or cellulose acetate butyrate plastic shall be used in the manufacture of the flowchart template. The face of the template shall be finished in a light matte finish so that when the template is placed with the matte side up on a printed surface, the printing shall be clearly legible. The back side of the template shall be finished in a high polish.

3.1.2 Paper. The paper envelope shall be fabricated from ledger paper having the following characteristics:

A basis weight of not less than 32 pounds per 500 sheets of a basic ream size of 17 by 22 inches in accordance with TAPPI T-410.

A thickness of 0.0057 ± 0.0004 inches in accordance with TAPPI T-411.

A folding endurance of paper MIT tester, of not less than 40 double folds in accordance with TAPPI T-511 smooth finish.

3.2 Template.

3.2.1 The flowchart template shall be thin, flat (in cross-section) and have a rectangular shape with square corners (see 3.1.1 for material).

3.2 2 Dimensions.

Overall length - approximately - 10 inches.

Overall width - approximately - 5-1/4 inches.

Thickness - approximately - 1/32 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

3.2.3 Graduations and markings. All graduations and markings on the flowchart template shall be permanent, accurate, and colored to be clearly legible and visible against the background and shall be in accordance with figure 1. The template graduations and markings shall be tested in accordance with 4.5. The markings for the rule lines, center lines and titles shall be printed in fine (0.008 inch) black lines. The grid lines which are spaced at 1/10 inch intervals shall be very fine (0.004 inch) black lines and shall extend to 3/10 of an inch from each end and bottom and 5/10 of an inch from top. Grid lines shall skip over titles.

3.2.4 Cutouts. The configurations of the cutouts for the flowchart template shall be in accordance with ANSI Standard X3.5 and arranged in accordance with figure 1. The cutouts shall be either milled or die stamped.

3.3 Envelope.

3.3.1 Dimensions.

Overall length - approximately - 10-1/4 inches.
Folded overall width - approximately - 5-1/2 inches.

3.3.2 Markings and instructions. The markings and instructions on the envelope shall be in accordance with figure 2 (see 3.1.2 for material).

3.4 Workmanship. The template shall be free from defects which affect appearance or impair serviceability. The template shall have no rough edges, burrs, or flashing. The working edges shall be straight.

3.5 Identification marking. The manufacturer's name, trademark, or other identifying information shall be marked on the template and envelope in addition to the marking illustrated in figures 1 and 2.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract oor order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling. Samples for inspection shall be in accordance with MIL-STD-105.

4.3 Inspection. Samples selected in accordance with 4.2 shall be inspected for the following defects. Lot acceptance or rejection shall be based on acceptable quality level (AQL) per hundred units as specified in table I, inspection level II.

TABLE I. Classification of defects

Defect	Classification	
	2.5	4.0
Material not as specified (3.1, 3.1.1, 3.1.2)	X	
Graduations or markings not as specified (3.2.3)	X	
Dimensions not as specified (3.2.2)		X
Cutouts not as specified (3.2.4)	X	
Identification not as specified (3.5)		X

4.4 Sampling. Sampling for test shall be in accordance with MIL-STD-105 with an AQL of 2.5 percent defective, inspection level S-2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:54Z
Check the source to verify that this is the current version before use.

4.5 Test. A clean white cloth shall be moistened with water and rubbed under pressure, along the full length of one of the graduated surfaces of the template, keeping the same portion of the cloth in contact with the graduated surface at all times. The graduations and markings shall be rubbed not less than ten times in each direction. Any adverse effect on the graduations or markings, or any traces of coloring on the cloth shall constitute failure of this test.

4.6 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing, and marking requirements comply with section 5 of this specification. Defects shall be scored in accordance with table II. For examination of contents, the sample unit shall be one shipping container fully prepared for delivery selected just before the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S2 and the AQL shall be 4.0 defects per hundred units.

TABLE II. Classification of preparation for delivery defects

Examine	Defect
Marking	Omitted incorrect; illegible; improper size, location sequence; or method of application.
Material	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling, bulging or distortion of container.
Contents	Number per container is more or less than required. Net weight exceeds the requirements of the applicable box specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Six templates individually packaged in envelopes as described in 3 3 shall be packaged in a close-fitting box conforming to PPP-B-566, PPP-B-665, or PPP-B-676. The box shall be closed in accordance with the appendix to the applicable box specification. The box shall be waterproofed in accordance with method 1 C-2 of MIL-P-116.

5.1.1.2 Intermediate packaging. Unless otherwise specified (6.2), twelve unit packages (72 templates) packaged, as specified in 5.1.1.1 shall be further packaged in a close-fitting box conforming to PPP-B 566, PPP-B-665 or PPP-B-676. The box shall be closed in accordance with the appendix to the applicable box specification.

5.1.2 Level C. The template shall be packaged to insure protection during shipment and safe delivery to destination.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Templates, packaged, as specified in 5.1, shall be packed in a close-fitting box conforming to PPP-B-636, V3C. The box shall be closed, waterproofed, and banded in accordance with the appendix to PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Eight intermediate packages (576 templates), packaged, as specified in 5.1, shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with method II of the appendix to PPP-B-636. When quantities less than specified are required (see 6.2), the templates shall be packed in a close-fitting box conforming to that specified herein.

5.2.3 Level C. The templates, packaged as specified in 5.1, shall be packed to comply with the National Motor Freight Classification Rules or the Uniform Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, all marking shall be in accordance with 5.3.1 or 5.3.2, as specified (see 6.2).

5.3.1 Civil agencies. All marking shall be in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. All marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. This FIPS, ADP flowchart template is intended for use by computer programmers in the preparation of flowcharts for information processing systems, including automatic data processing systems.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Level of packaging and packing required (see 5.1 and 5.2).
(c) When quantities less than specified are required (see 5.2.2).
(d) Whether civil or military marking is required (see 5.3).
(e) When inspection records are required (see 4.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

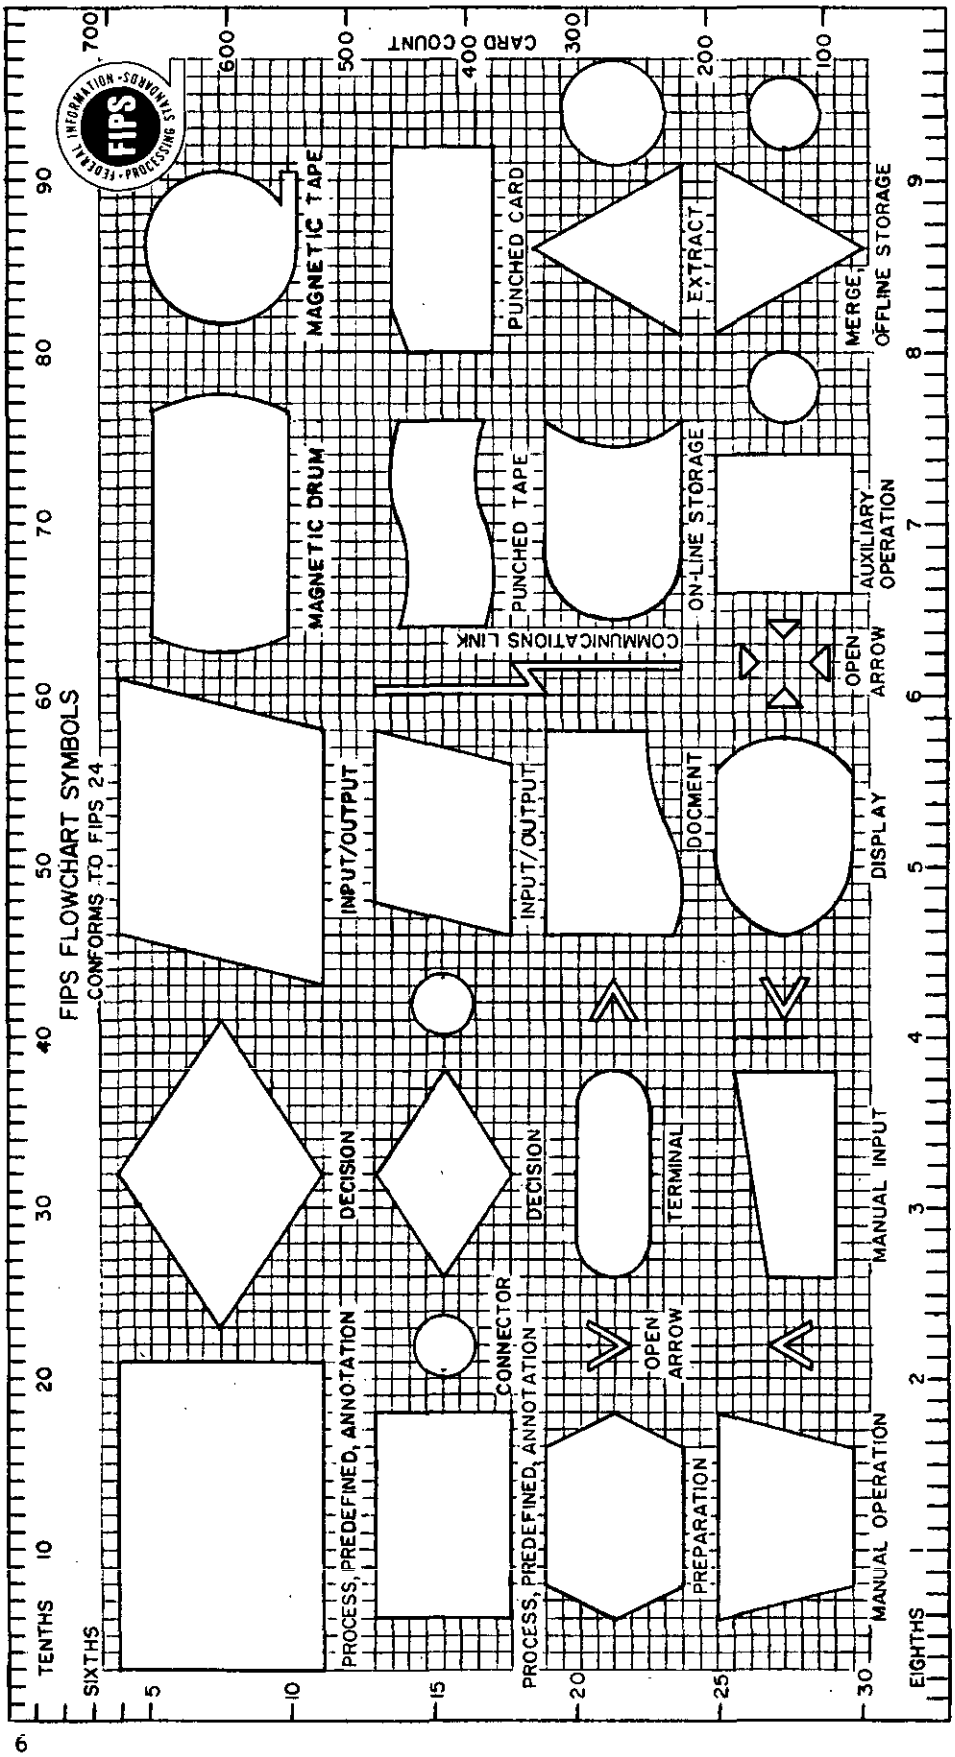


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

The symbols illustrated on this jacket conform to FIPS--(ANSI X3.5-1970)

These symbols should be used in preparing data processing flowchart documentation.







ANNOTATION  FOR THE ADDITION OF DESCRIPTIVE COMMENTS OR EXPLANATORY NOTES AS CLARIFICATION.	**AUXILIARY OPERATION**  OFFLINE OPERATIONS PERFORMED ON EQUIPMENT NOT UNDER DIRECT CONTROL OF THE CENTRAL PROCESSOR.	**CONNECTOR**  A JUNCTION IN THE LINE OF FLOW	**CORE**  I/O FUNCTION IN WHICH THE MEDIUM IS MAGNETIC CORE (USE AUXILIARY OPERATION SYMBOL)
DECISION  POINTS IN A PROGRAM WHERE SEVERAL PATHS MAY BE POSSIBLE, BASED ON VARIABLE CONDITIONS	**DISPLAY**  I/O FUNCTION IN WHICH THE INFORMATION IS DISPLAYED FOR HUMAN USE AT TIME OF PROCESSING.	**DOCUMENT**  I/O FUNCTION IN WHICH THE MEDIUM IS A DOCUMENT	**EXTRACT**  REMOVAL OF ONE OR MORE SPECIFIC SETS OF ITEMS FROM A SINGLE SET OF ITEMS.
INPUT/OUTPUT  MAKING AVAILABLE INFORMATION FOR PROCESSING OR RECORDING PROCESSED INFORMATION.	**MAGNETIC DISK**  I/O FUNCTION IN WHICH MEDIUM IS MAGNETIC DISK.	**MAGNETIC DRUM**  I/O FUNCTION IN WHICH MEDIUM IS MAGNETIC DRUM.	**MAGNETIC TAPE**  I/O FUNCTION IN WHICH THE MEDIUM IS MAGNETIC TAPE.
MANUAL INPUT  I/O FUNCTION IN WHICH THE INFORMATION IS ENTERED MANUALLY AT THE TIME OF PROCESSING.	**MANUAL OPERATION**  ANY OFFLINE PROCESS GEARED TO THE SPEED OF A HUMAN BEING.	**MERGE**  COMBINING TWO OR MORE SETS INTO ONE SET.	**OFFLINE STORAGE**  REPRESENTS ANY OFFLINE STORAGE OF INFORMATION REGARDLESS OF THE MEDIUM
ONLINE STORAGE  REPRESENTS AN I/O FUNCTION UTILIZING MASS STORAGE THAT CAN BE ACCESSED ONLINE.	**PRE-DEFINED PROCESS**  A NAMED PROCESS CONSISTING OF ONE OR MORE OPERATIONS OR PROGRAM STEPS, SPECIFIED ELSEWHERE. (SUBROUTINE)	**PREPARATION**  A GROUP OF INSTRUCTIONS WHICH MODIFY, UPDATE, CORRECT OR OTHERWISE CHANGE THE PROGRAM.	**PROCESS**  REPRESENTS THE PROCESS OF EXECUTING A DEFINED OPERATION OR GROUP OF OPERATIONS.
PUNCHED CARD  I/O FUNCTION IN WHICH THE MEDIUM IS PUNCHED CARDS INCLUDING MARK SENSE CARDS, STUB CARDS.	**PUNCHED TAPE**  I/O FUNCTION IN WHICH THE MEDIUM IS PUNCHED TAPE.	**SORT**  ARRANGING A SET INTO A PARTICULAR SEQUENCE. (USE EXTRACT AND MERGE)	**TERMINAL**  A POINT AT WHICH INFORMATION CAN ENTER OR LEAVE

Figure 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - ME
Navy - SH
Air Force - 82

User interest:

Navy - YD

MILITARY COORDINATING ACTIVITY:

Army - ME

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
COM - NBS

Preparing activity:

GSA - FSS

Project No. 6675-0613

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 30 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:54Z
Check the source to verify that this is the current version before use.