MIL-H-5364D
9 March 1972
SUPERSEDING
MIL-H-5364C(USAF)
29 May 1968

MILITARY SPECIFICATION

HARNESSES, SHOULDER SAFETY, GENERAL SPECIFICATION FOR

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the general requirements for safety shoulder harnesses for use with both ejection and nonejection seats.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

DDD-L-20	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-601	Box, Wood, Cleated Plywood
PPP-B-636	Box, Fiberboard

Military

MIL-P-116	Preservation, Methods of
MIL-I-6903	Ink, Marking (For Parachutes and Other Textile Items)

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of

FSC 1680

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:31Z
Check the source to verify that this is the current version before use.

MIL-STD-1186 Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods

DRAWING

Air Force

56E534 Loop - Shoulder Harness, Lap Belt Attachment

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction. This specification provides for preproduction testing.

3.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Detail drawing. The requirements of the applicable detail drawing (see 6.3) shall form a part of this specification.

* 3.4 Strength. The Types MB-2A, MB-5, and MB-6 shoulder harnesses shall be capable of withstanding a static load of 3,600 pounds without deformation of the metal fittings, slippage of the webbing through the adjusting hardware, weakening of the webbing, or weakening of the stitching.

* 3.5 Identification of product. A label conforming to DDD-L-20, type II, class 11, shall be sewn on each shoulder harness as shown on the applicable detail drawing. The following specific information shall be included on the label:

Harness, Aircraft Safety, Shoulder Adjustable
Type (as specified on applicable detail drawing)
Specification MIL-H-5364D
Stock No.
Order No.
Date of Manufacture
Manufacturer's Name or Trademark

* 3.5.1 Proof load marking. Each harness shall have the proof load test date (see 4.5.3) stenciled on the underside of either shoulder strap. The information shall include the letters PL followed by the date of test. The month shall be indicated by the first three letters of the word and the year by the last two

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:31Z
Check the source to verify that this is the current version before use.

numerals (example: "PL Jan 68" will indicate a proof load date of January 1968). The markings shall be made with ink conforming to MIL-I-6903, color No. 13538 of FED-STD-595.

3.6 Workmanship. The harness, including all parts and accessories, shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to freedom of parts from burrs and sharp edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspections. The examining and testing of harnesses shall be classified as follows:

(a) Preproduction inspection

(b) Quality conformance inspection.

* 4.3 Preproduction inspection. The preproduction test sample, consisting of one harness of each type on the contract or order, shall be subjected to the following examinations and tests as described under 4.5:

(a) Examination of product (4.5.1)

(b) Examination of loop (4.5.2)

(c) Ultimate load (4.5.4).

* 4.4 Quality conformance inspection. Quality conformance inspection shall consist of:

(a) Individual inspection

(b) Sampling inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:31Z
Check the source to verify that this is the current version before use.

* 4.4.1 Individual inspection. Each harness shall be subjected to the following examinations and test as described under 4.5:

(a) Examination of product (4.5.1)

(b) Examination of loop (4.5.2)

(c) Proof load (4.5.3).

* 4.4.2 Sampling inspection. Unless otherwise specified by the procuring activity (see 6.2), harnesses shall be sampled in accordance with inspection level S-3 of MIL-STD-105. The acceptable quality level shall be 1.5 percent defective. The test samples shall be subjected to the ultimate load test as described in 4.5.4.

* 4.5 Inspection methods

4.5.1 Examination of product. The harness shall be examined to determine conformance to this specification with respect to materials, workmanship, dimensions, and markings.

* 4.5.2 Examination of loop. Each end loop of each shoulder harness shall be examined to determine conformance to this specification with respect to dimensions. This examination shall be conducted on the MB-2A and MB-6 harness loops only, subsequent to the proof load test after a waiting period of not less than 24 hours. Loop acceptability shall be determined by use of an inspection tool conforming to figure 1. The inspection tool shall be held in one hand and the harness loop pushed over the small end of the tool with the sewn end of the loop against the chamfered side of the tool. The loop shall be pushed as far up the tool as can be done easily without using excessive force. Easily pushed is defined as holding the loop tightly and pushing it by hand pressure only without bracing the tool upon or against anything. The loop shall not be pushed up the tool to such an extent as to cause the loop material to stretch or the threads to pull. The loop shall be considered acceptable if it comes to rest anywhere between the two parallel scribed lines on the tool. Minor air spaces or deviations between the shape of the loop and tool are acceptable.

* 4.5.3 Proof load. Each shoulder harness shall be subjected to a proof load of 1,000 pounds in accordance with the procedure specified in 4.5.4.1. Breaking of the warp of the webbing or stitching, slippage of the webbing through the adjuster hardware, or deformation of the metal fittings shall be cause for rejection of the harness. The date of test shall be stenciled on the underside of either shoulder strap as specified in 3.5.1.

* 4.5.4 Ultimate load. Each sample of all harnesses shall be subjected to an ultimate load of 3,600 pounds in accordance with the procedure specified

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:31Z
Check the source to verify that this is the current version before use.

in 4.5.4.1. Deformation of the metal fittings, slippage of the webbing through the adjusting hardware, weakening of the webbing, or weakening of the stitching shall be cause for rejection of the harness. Harnesses and components thereof that have been subjected to the ultimate load test shall be considered unfit for further use.

* 4.5.4.1 Test procedure for static load tests. The harness shall be assembled in the testing machine by attaching the metal end fitting to the movable head, and attaching the webbing loop ends around a 1/2-inch diameter bar, fixed perpendicular to the direction of pull, and attached to the stationary head. The harness loop ends shall be laterally supported to prevent warping or rollover. The harness shall be adjusted to assure an equal transmittal of load through each strap. The load shall be applied so that it is transmitted through the attaching point of the metal end fitting and the webbing ends. The angle between the two straps of the Types MB-2A, MB-5, and the MB-6 shoulder harnesses shall be not less than 30 nor more than 45 degrees during the application of the static load.

* 4.6 Inspection of preparation for delivery. Inspection of the preservation, packaging, packing, and marking shall be in accordance with section 5 or the documents referenced therein.

5. PREPARATION FOR DELIVERY

* 5.1 Preservation and packaging. Preservation and packaging shall be level A, B, or C, as specified (see 6.2).

* 5.1.1 Level A. Harnesses shall be packaged in accordance with method III of MIL-P-116, using a unit container conforming to PPP-B-636, class weather resistant.


* 5.1.2 Level B. Each harness shall be packaged in accordance with method III of MIL-P-116, one each in a unit container conforming to PPP-B-636.

* 5.1.3 Level C. Harnesses shall be packaged in a manner to provide adequate protection against deterioration or damage during shipment from the supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

* 5.2.1 Level A. Harnesses preserved and packaged as specified in 5.1 shall be packed in plywood shipping containers conforming to PPP-B-601, overseas type, surface treated in accordance with the specification. Insofar as practicable, containers shall be of uniform shape and size and shall contain identical quantities.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:31Z
Check the source to verify that this is the current version before use.

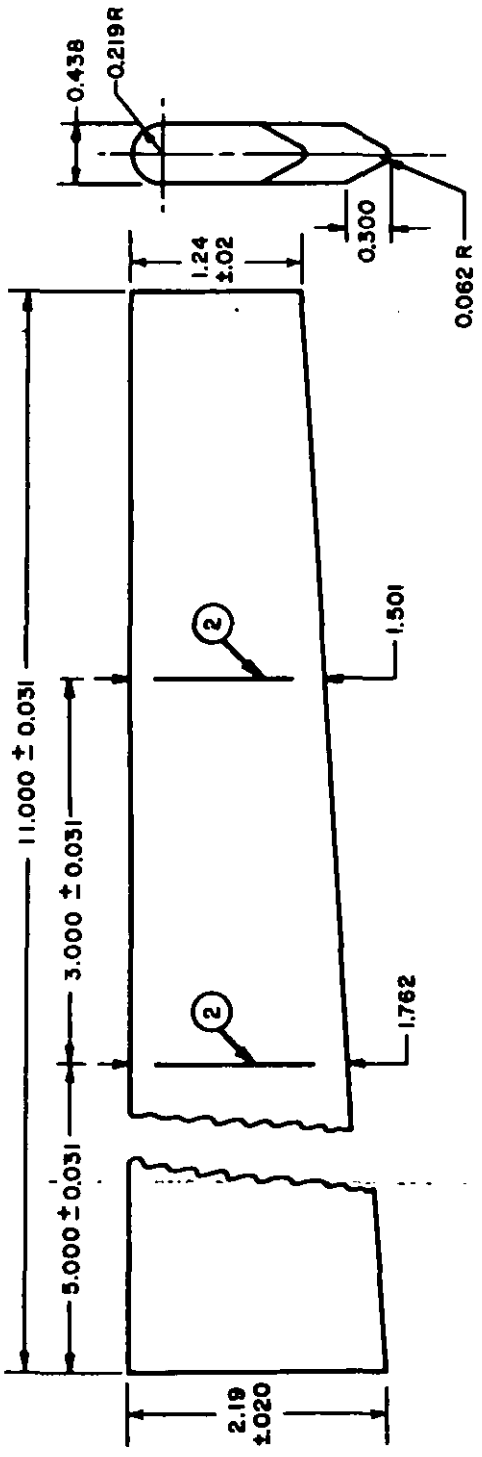

NOTES:
1. MATERIAL: PLASTIC OR METAL
2. ENGRAVE LINES 0.031 WIDTH 0.020 DEEP (ONE SIDE ONLY)
3. BREAK ALL SHARP EDGES
4. DIMENSIONS IN INCHES
5. TOLERANCES: DECIMALS ± 0.005 UNLESS OTHERWISE SPECIFIED

* FIGURE 1. Inspection Tool for Shoulder Harness Loop, Drawing 56E534-4

Source: https://assist.dla.mil -- Downloaded: 202610-17T04:31Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B. Harnesses packaged as specified in 5.1 shall be packed in shipping containers conforming to PPP-B-636, class weather resistant. Shipping containers shall be of minimum cube and tare consistent with the protection required. Insofar as practicable, exterior shipping containers shall be of uniform shape and size and shall contain identical quantities. The gross weight of each shipping container shall not exceed the weight limitation of the specification. Containers shall be closed and strapped in accordance with the specification and appendix thereto. Shipping containers shall meet the special requirement table of PPP-B-636, as applicable.

5.2.3 Level C. Packages that require overpacking for acceptance by the carrier shall be placed in exterior-type shipping containers in a manner that will insure safe transportation at the lowest rate to the point of delivery. Containers shall comply with Uniform Freight Classification Rules or regulations of other common carriers as applicable to the mode of transportation.

5.3 Physical protection. Cushioning, blocking, and bracing shall be in accordance with MIL-STD-1186 except that the waterproofing requirements for cushioning materials and containers for domestic shipments shall be waived. The drop tests of MIL-STD-1186 shall be waived when the item is preserved, packaged, and packed for immediate use or when the drop tests of MIL-P-116 are applicable.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The harnesses covered by this specification are intended to be worn with a lap-type safety belt to secure flying personnel in individual crew seats, either ejection or nonejection seats as specified on the applicable detail drawing.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) When sampling inspection will be other than specified in 4.4.2

(c) Selection of applicable levels of preservation, packaging, and packing (see 5.1 and 5.2).

* 6.3 Detail drawings. Drawings 56D532, 56D533, and 57D677 cover the detail requirements of the Types MB-5, MB-6 and MB-2A harnesses, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:31Z
Check the source to verify that this is the current version before use.

6.4 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Review activities:
Army - AV
Navy - AS
Air Force - 82

Preparing activity:
Air Force - 11

Project No. 1680-0250

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:31Z
Check the source to verify that this is the current version before use.