MIL-L-11484 / 90A
27 June 1988
SUPERSEDING
MIL-L-11484 / 90
27 February 1970


MILITARY SPECIFICATION SHEET

LAPEL BUTTONS, LENGTH OF SERVICE, NATIONAL TRANSPORTATION SAFETY BOARD

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-L-11484.




-1, -2

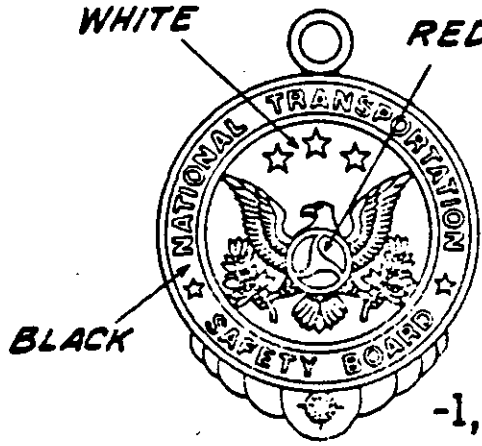


-1, -2



-3 thru -8

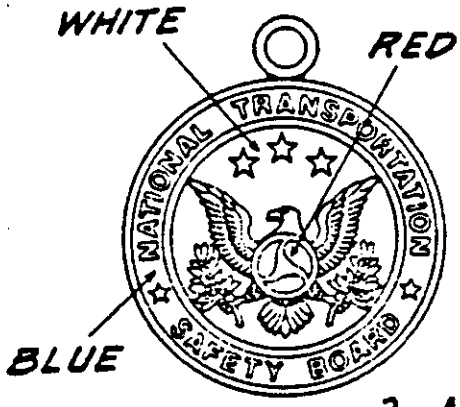

-3, -4

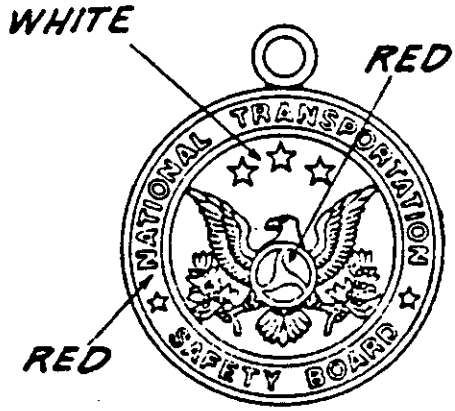

-5, -6, -7, -8

DASH NOS.

-1: 30 YEARS (MALE)
-2: 30 YEARS (FEMALE)
-3: 25 YEARS (MALE)
-4: 25 YEARS (FEMALE)
-5: 20 YEARS (MALE)
-6: 20 YEARS (FEMALE)
-7: 15 YEARS (MALE)
-8: 15 YEARS (FEMALE)

FSC 8455

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T08:12Z
Check the source to verify that this is the current version before use.

MATERIAL:
BASE:
-1,-2: 10 KARAT GOLD WITH A 2 POINT GRADE A WHITE DIAMOND
-3,-4,-5,-6: GILDING METAL
-7,-8: STERLING SILVER
DEVICE: STERLING SILVER

DIMENSIONS (INCHES):
BASE:
DIAMETER: 5/8 (REF)
THICKNESS (AT EDGE): .050 ± .005
DEVICE:
HEIGHT (OVERALL): 5/16 (REF)
WIDTH (OVERALL): 3/8 (REF)
THICKNESS (ON SHIELD): .070 (REF)
THICKNESS (ASSEMBLED): .120 ± .010

FINISH:
BASE:
-1,-2: ENAMELED, REVERSE AND EDGES POLISHED
-3,-4,-5,-6: ENAMELED, GOLD PLATED, REVERSE AND EDGES POLISHED
-7,-8: ENAMELED, REVERSE AND EDGES CLEAN
DEVICE: ENAMELED, OXIDIZED, RELIEVED, SATIN FINISH

NOTES:

1. ENAMELED AREAS SHALL BE AS INDICATED. THE ENAMEL COLORS SHALL MATCH THE ENAMEL COLORS ON THE STANDARD SAMPLE AND SHALL CONFORM TO THE TIOH COLOR CHIP NOS. LISTED BELOW:

COLOR	CHIP NOS.
RED	1
WHITE	28
BLUE	18
BLACK	26

2. THE DESIGNS SHOWN ARE ILLUSTRATIVE OF THE FEMALE LAPEL BUTTONS. THE MALE DESIGNS ARE IDENTICAL TO THE FEMALE EXCEPT FOR THE OMISSION OF THE LUGS AND THE ADDITION OF A PRONG AND BALL TYPE CATCH.

3. THE LUG FOR DASH NOS 2, 4, 6 AND 8 SHALL BE AN INTEGRAL PART OF THE BASE AND SHALL BE CUT INTO THE WORKING DIES. THE LUG SHALL BE 1/8 INCH BY 1/8 INCH BY .050 INCH THICK AND SHALL HAVE A 1/16 INCH DIAMETER HOLE CENTERED IN THE LUG. EACH FEMALE LAPEL BUTTON SHALL HAVE A JUMP RING 3/16 INCH IN DIAMETER FITTED THROUGH THE LUG. THE JUMP RING SHALL BE FORMED FROM .044 INCH DIAMETER WIRE. THE ENDS OF THE WIRE SHALL BE EITHER STRAIGHT OR BIAS CUT AND SHALL BE ALIGNED AND TOGETHER.

4. THE ATTACHING DEVICE FOR DASH NOS. 1, 3, 5 AND 7 SHALL BE PRONG WITH A BALL TYPE CLUTCH. THE PRONG SHALL BE CENTERED ON AND SOLDERED OR FUSED TO THE BACK OF THE LAPEL BUTTON.

5. THE DEVICE SHALL BE LOCATED AS SHOWN AND SHALL BE SECURED TO THE BASE BY MEANS OF TWO RIVETS LOCATED ON THE HORIZONTAL CENTERLINE OF THE DEVICE.

6. DASH NOS. 1 AND 2 SHALL HAVE MINIMUM 2 POINT. GRADE A, DIAMOND SET IN A THREE BEAD SETTING LOCATED AS SHOWN.

Custodian:
Army - IH
Review activities:
DLA - CT
User activities:
Other - DOT

Preparing activity:
Army - IH
(Project No. 8455 - 0270)

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T08:12Z
Check the source to verify that this is the current version before use.