DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

REVIEWER ACTIVITIES:
ARMY-GL
DLA-IS
NSA-NS

USER ACTIVITIES:
NAVY-MC,OS,SH

PROCUREMENT SPECIFICATION: MIL-B-45908

F.A.: AR
Other Cust: 99

INTERNATIONAL INTEREST:

SUPERSEDES:

TITLE: BOLT,EYE,SHOULDER UNC-2A AND UNF-2A

MILITARY STANDARD
MS51937

PAGE 1 OF 2

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0832

© ENTIRE STANDARD REVISED

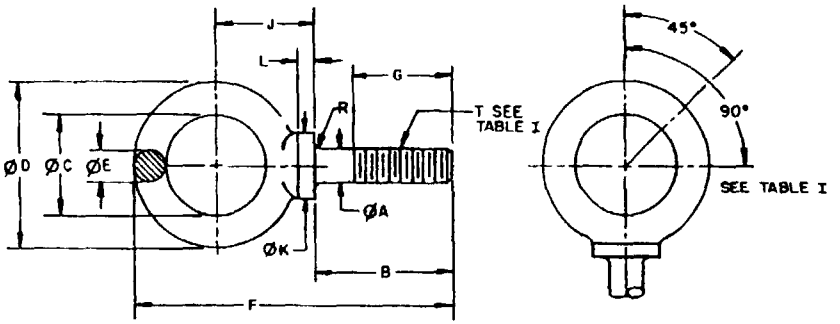


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	T THREAD SIZE UNC-2A	T THREAD SIZE UNF-2A	ØA SHANK	B SHANK LENGTH	ØC EYE	ØD NOMINAL EYE	ØE EYE SECTION	F OVERALL LENGTH	G MINIMUM LENGTH FULL THREAD	J CENTERLINE EYE TO SHOULDER	ØK SHOULDER	L SHOULDER HEIGHT	R RADIUS UNDER SHOULDER	PROOF LOAD POUNDS MIN	SAFE WORKING LOAD POUNDS AT 1/ 0°	45°	90°
1	.250-20	-	.25	1.00	.69	1.19	.19	2.22	.75	.69	.50	.12	.015	600	400	100	80
21	-	.250-28	.28	1.06	.81		.25	2.53		.81	.56	.19	.025	690	460	115	92
2	.3125-18	-	.31	1.12	.81	1.44	.25	2.66	.81	.88	.56	.12	.015	1,200	800	200	160
22	-	.3125-24	.34	1.19	.94		.31	2.97		1.00	.62	.19	.025	1,325	882	221	176
3	.375-16	-	.38	1.25	.94	1.69	.31	3.09	.88	1.06	.62	.12	.015	2,100	1,400	350	280
23	-	.375-24	.41	1.38	1.06		.38	3.47		1.19	.69	.19	.025	2,380	1,585	397	326
4	.4375-14	-	.44	1.38	1.00	1.81	.34	3.41	1.00	1.19	.75	.19	.015	3,000	2,000	500	400
24	-	.4375-20	.47	1.50	1.12		.41	3.78		1.31	.81	.25	.025	3,350	2,230	559	445
5	.500-13	-	.50	1.50	1.12	2.12	.44	3.81	1.12	1.31	.88	.19	.015	3,900	2,600	650	520
25	-	.500-20	.53	1.62	1.25		.50	4.19		1.44	.94	.25	.025	4,395	2,927	734	585
6 2/	.5625-12	-	.56	1.62	1.19	2.25	.47	4.19	1.25	1.50	.94	.22	.020	4,500	3,000	750	600
			.59	1.75	1.31		.53	4.56		1.62	1.00	.28	.045				
7	.625-11	-	.62	1.75	1.31	2.56	.56	4.56	1.38	1.59	1.00	.25	.020	6,000	4,000	1,000	800
			.66	1.88	1.44		.62	4.94		1.72	1.06	.31	.045				
8	.750-10	-	.75	2.00	1.44	2.81	.62	5.06	1.62	1.72	1.12	.25	.020	9,000	6,000	1,500	1,200
			.78	2.12	1.56		.69	5.50		1.91	1.25	.31	.045				
9	.875-9	-	.88	2.25	1.56	3.19	.75	5.75	1.81	2.03	1.31	.31	.040	10,000	6,600	1,670	1,330
			.91	2.38	1.69		.81	6.19		2.22	1.44	.38	.065				
10	1.000-8	-	1.00	2.50	1.69	3.56	.88	6.44	2.06	2.22	1.50	.38	.060	12,000	8,000	2,000	1,600
			1.06	2.62	1.81		.94	6.88		2.41	1.62	.44	.095				
11 2/	1.125-7	-	1.12	2.75	1.94	4.06	1.00	7.31	2.31	2.59	1.69	.44	.060	15,000	10,000	2,500	2,000
			1.19	2.88	2.06		1.06	7.75		2.78	1.81	.50	.095				
12	1.250-7	-	1.25	3.00	2.12	4.44	1.09	8.00	2.50	2.84	1.88	.50	.060	22,500	15,000	3,750	3,000
			1.34	3.12	2.25		1.16	8.44		3.03	2.00	.56	.095				
13	1.500-6	-	1.50	3.50	2.44	5.19	1.31	9.22	3.00	3.19	2.12	.50	.060	27,000	18,000	4,500	3,600
			1.59	3.62	2.56		1.38	9.72		3.44	2.25	.62	.095				
14	1.750-5	-	1.75	3.75	2.75	6.00	1.50	10.50	3.19	3.88	2.50	.50	.060	33,000	22,000	5,500	4,400
			1.84	3.88	3.00		1.62	11.12		4.12	2.62	.62	.095				
15	2.000-4.5	-	2.00	4.00	3.06	6.88	1.75	11.53	3.38	4.25	2.88	.62	.060	39,000	26,000	6,500	5,200
			2.09	4.12	3.44		1.88	12.22		4.50	3.00	.75	.095				

1/ APPLIES IF SHOULDER IS PROPERLY SEATED. THESE SAFE WORKING LOADS ARE BASED ON THE FOLLOWING PERCENTAGES OF MINIMUM PROOF LOADS AS SPECIFIED IN ASTM A489-83; 0° - 66.6 PER CENT, 45° - 16.7 PER CENT, 90° - 13.3 PER CENT.

2/ NON-PREFERRED SIZE.

APPROVED 23 APR 63 REVISED © 27 SEP 85

FSC 5306

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T11:36Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5306

REQUIREMENTS:

1. MATERIAL: FORGED CARBON STEEL IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

2. PROTECTIVE COATING AND SURFACE TREATMENT: CADMIUM PLATE OR UNCOATED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

3. THREADS: THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.

4. PROOF LOAD: EYE BOLTS SHALL BE TESTED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

5. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS SHEET NUMBER, FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I AND THE FINISH CODE LETTER "C" FOR CADMIUM PLATE, NO CODE FOR UNCOATED.

EXAMPLE: MS51937-1C

- FINISH CODE
  - "C" - CADMIUM PLATE
  - NO CODE - UNCOATED
- DASH NUMBER
- BASIC MS SHEET NUMBER

MS51937-1C INDICATES: BOLT, EYE, SHOULDER, .250-20 UNC-2A; DIMENSIONS FROM TABLE I, CADMIUM PLATE

MS51937-21 INDICATES: BOLT, EYE, SHOULDER, .250-28 UNF-2A; DIMENSIONS FROM TABLE I, UNCOATED

6. MARKING: MANUFACTURER'S IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
NAVY - MC, OS, SH

REVIEWER ACTIVITIES:
ARMY - GL
DLA - IS
NSA - NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 23 APR 63 REVISED © FOR CHANGES SEE PAGE 1 AND 2

P. A. AR / Other Cust 99	INTERNATIONAL INTEREST	TITLE: BOLT, EYE, SHOULDER UNC-2A AND UNF-2A	MILITARY STANDARD MS 51937
PROCUREMENT SPECIFICATION: MIL-B-45908	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0832

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T11:36Z
Check the source to verify that this is the current version before use.