MIL-B-26195B
AMENDMENT 1
26 JULY 1974

MILITARY SPECIFICATION
BOXES, WOOD-CLEATED, SKIDDED, LOAD-BEARING BASE

This amendment forms a part of Military Specification MIL-B-26195B, dated 28 May 1968, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1. Under Federal Specification:

Delete "FF-B-571 Bolts, Nuts, Studs and Tap Rivets (and Materials for same)" and substitute "FF-B-584 Bolts, Finned Neck; Key Head; Machine; Ribbed Neck; Square Neck; Tee Head."

Add "FF-W-92 Washers, Metal, Flat (Plain)."

PAGE 3

3.1.2. Delete and substitute:

Plywood. Unless otherwise specified, plywood used in the fabrication of type I boxes shall conform to PS 51, type II, grade 3-4; PS 1, standard; or CS 157, grade C-D, interior. Plywood used to fabricate type II boxes shall conform to PS 51, type I, grade 3-4; PS 1, standard with exterior glue; or CS 157, grade C-C exterior. Minimum acceptable grade and type plywood shall conform to NN-P-530 referenced commercial and product standards. Unless otherwise specified, this plywood is furnished unsanded and untreated. When sanding or treatment or both are required, the contract or purchase order shall so specify (see 6.2). When treatment is specified, wood preservation shall comply with TT-W-572.

3.1.5. Delete the last two sentences and substitute:

"Unclinched nails shall be cement coated or chemically etched. Lag bolts shall be in accordance with FF-B-561. Carriage bolts shall conform to type I, class 1, style A with nuts of FF-B-584. Washers for lag and carriage bolts shall conform to FF-W-92."

FSC 8115

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

3.2. Delete the next to the last sentence and substitute:

"When specified (see 6.2), the lower one-third of the ends of each skid and the adjacent corner of the side panel shall be beveled 45 ± 5 degrees."

PAGES 6 AND 7

3.2.4. Delete and substitute:

Rubbing strips for skids. When specified (see 6.2), rubbing strips shall be applied to skids to provide forklift opening height of 3 (-1/8) inches and shall be same width as skids except as permitted herein. Rubbing strips of 3 (-1/8) inch thickness shall be applied with two staggered rows of thirty-penny nails spaced 12 inches apart in each row with a minimum of 5 nails required for each rubbing strip. Optionally, each rubbing strip may be built-up from two pieces of nominal 2 inch lumber by nailing of first piece to skid and second piece to first piece with either twelve-penny nails or pallet nails conforming to FF-N-105, type II, style 18, 3 inches long. When rubbing strips are used, the skids shall not be beveled. All rubbing strip ends shall be half beveled at 45 ± 5 degrees. Rubbing strips at ends of all skids shall be set back from end of skid a distance of 2 1/2 to 4 inches to allow for sling placement. Openings for forklift access shall be a minimum 12 inches wide and 28 inches center to center and positioned to straddle the center of gravity of the loaded container. The center pieces of rubbing strips shall be 16 inches in length. When the crate length is less than 60 inches, forklift openings may serve as sling openings.

3.2.5.1. Delete and substitute:

Cleats. Cleat arrangement on top, side and end panels (see figures 1 and 2) as well as filler cleat tolerance and drainage provisions shall be in accordance with PPP-B-601.

PAGE 8

3.3.1.3. In line 7 after "washers" insert "in accordance with 3.1.5."

PAGE 10

3.6. Delete and substitute:

Special markings. The following marking in minimum one inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

high letters shall be placed on the ends and the side panels of the boxes:

CAUTION: LIFT BY BASE ONLY

TO OPEN REMOVE BOTTOM LAG BOLTS (1" Spacing)

PAGE 12

Table of defects, lines 17 and 18 under defects, delete and substitute, "Rubbing strips not properly spaced, beveled, or improper size or missing."

Table of defects, lines 30 and 31 under defects, delete and substitute, "cement coated or chemically etched."

PAGE 13

5.1. In lines 7 and 8 delete "cotton draw string bag" and substitute, "container (box, bag, envelope) of suitable strength and size."

PAGE 14

6.2. Add in proper sequence: "(o) If beveling of skids is required (see 3.2)."

Add new paragraph:

6.3 Classification cross-reference.

MIL-B-26195B	MIL-B-26195A	MIL-B-26195 (USAF)
Type I	Class 1	Type II
Type II	Class 2	Type I
Style A	Style A	Style A
Style B	Style B	Style B
Style C	Style C	Style C
Class 1	Type 1	Class 1
Class 2	Type 2	Class 2

PAGE 16

Figure 1, delete and substitute new figure 1.

Page 18

Figure 3, delete and substitute new figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

MIL-B-26195B
AMENDMENT 1

PAGES 19 AND 20

Figures 4 and 5, delete beveled corners shown on ends of skids and substitute square corners.

PAGE 21

After "Figure" add "6."

PAGE 23

Figure 8, delete and substitute new figure 8.

Custodians:

Army - GL

Navy - SA

Air Force - 69

Review Activities:

Army - MU, SM

Navy - AS, SH, YD

Air Force - 70, 71, 82, 84

User Activities:

Army - AT, AV, CE, MI

Navy - MC

Air Force - 80, 82, 84

Other Interest:


Coast Guard - User

Preparing Activity:

Air Force - 69

Project No. 8115-0263


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

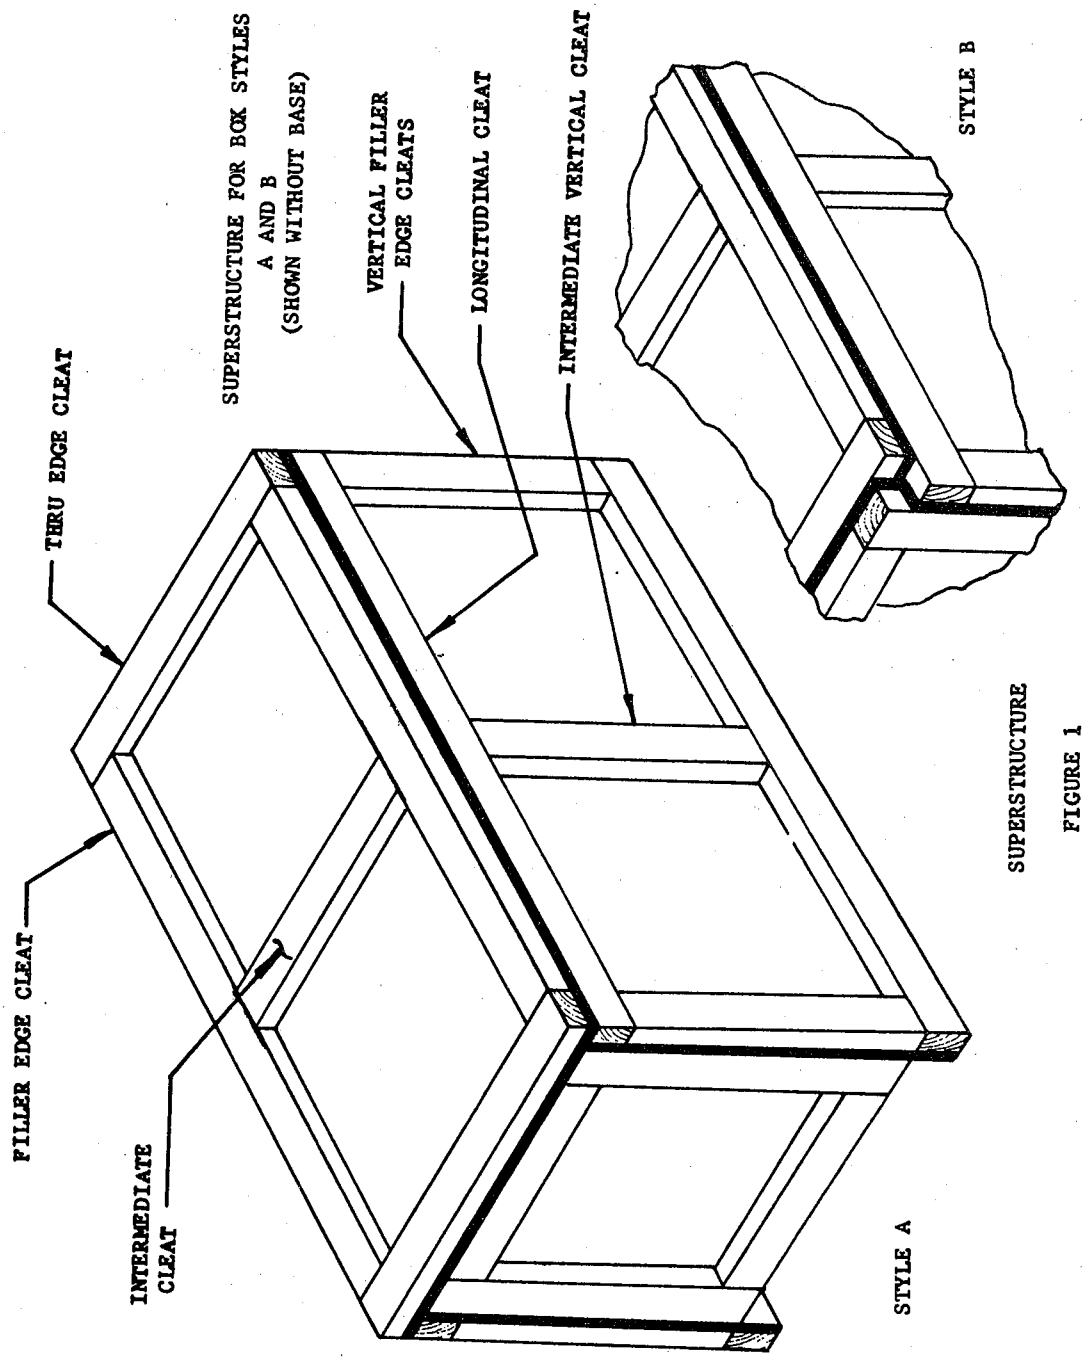

SUPERSTRUCTURE

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

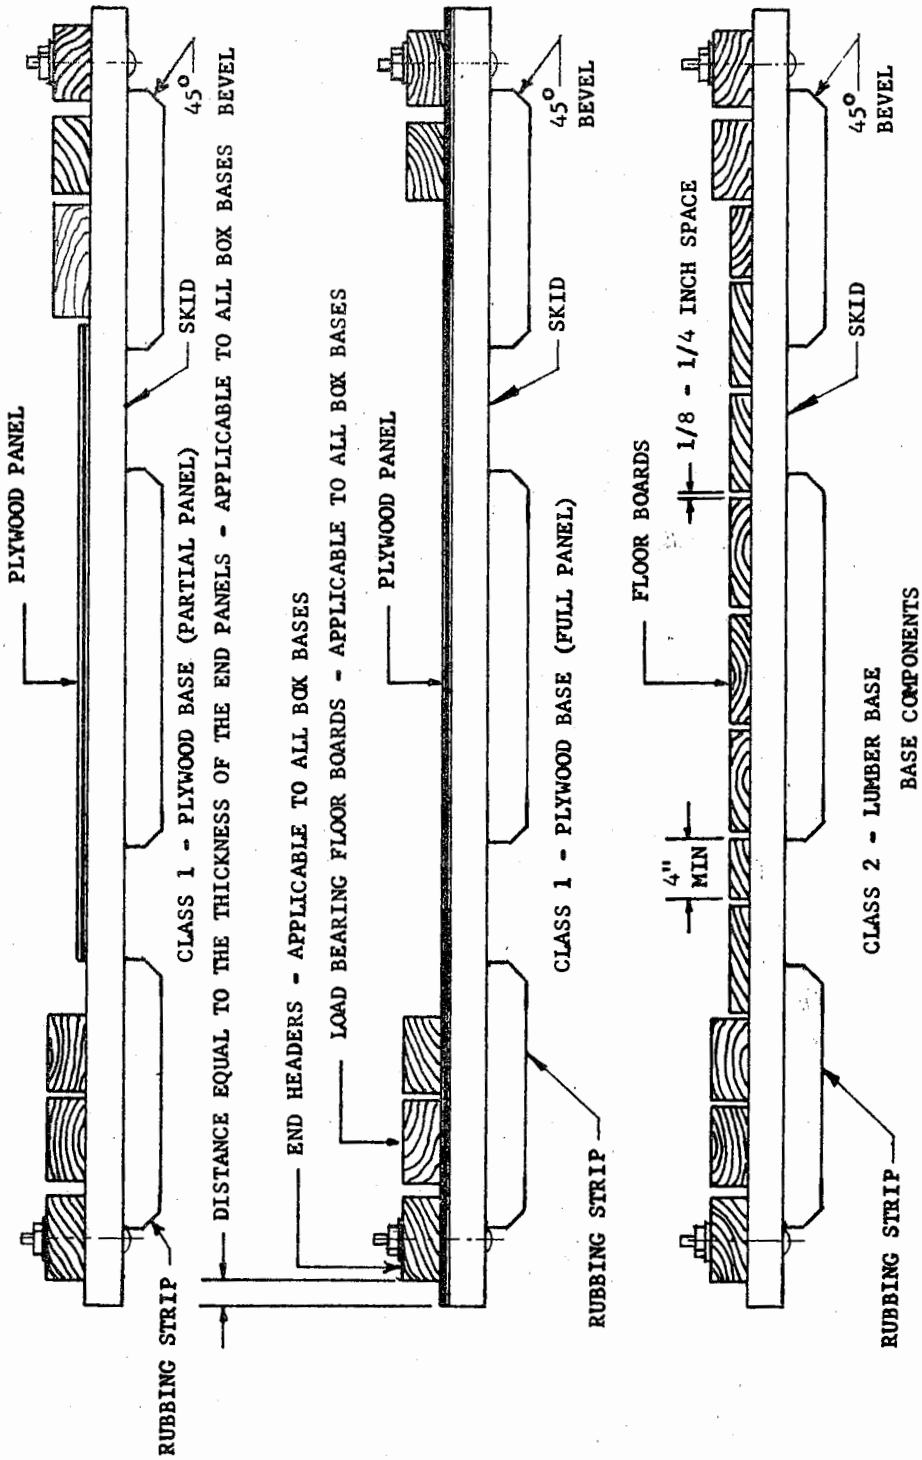

BASE COMPONENTS

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.

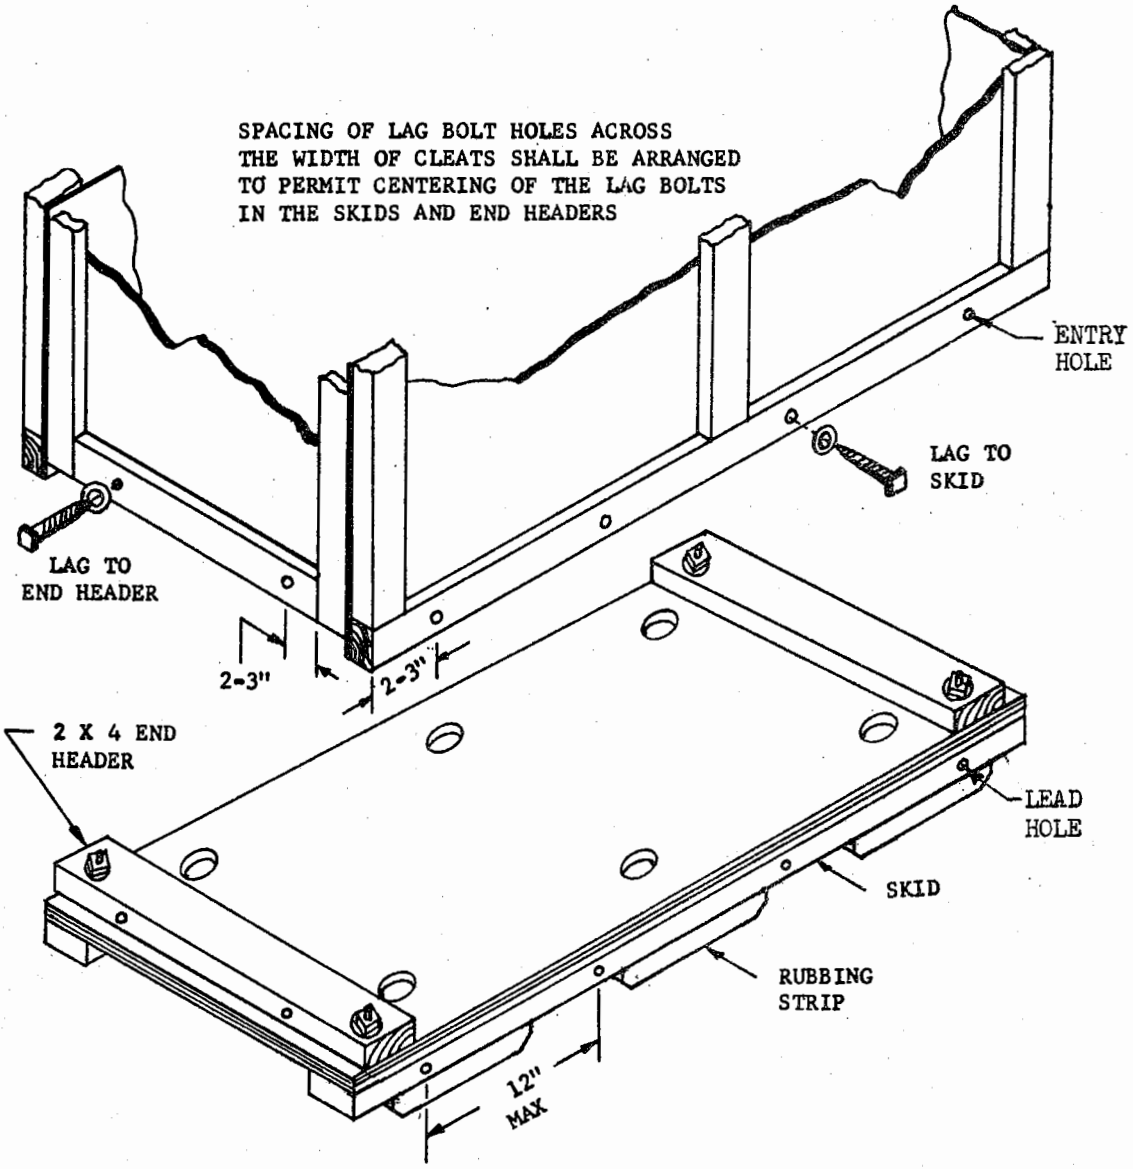


FIGURE 8. ASSEMBLY OF PANELS TO BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:57Z
Check the source to verify that this is the current version before use.