MILITARY SPECIFICATION SHEET

RELAY, ELECTRICAL, OVERVOLTAGE, TYPE II, HYBRID, SEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the relay described herein shall consist of this document and the latest issue of Specification MIL-R-26126(USAF)


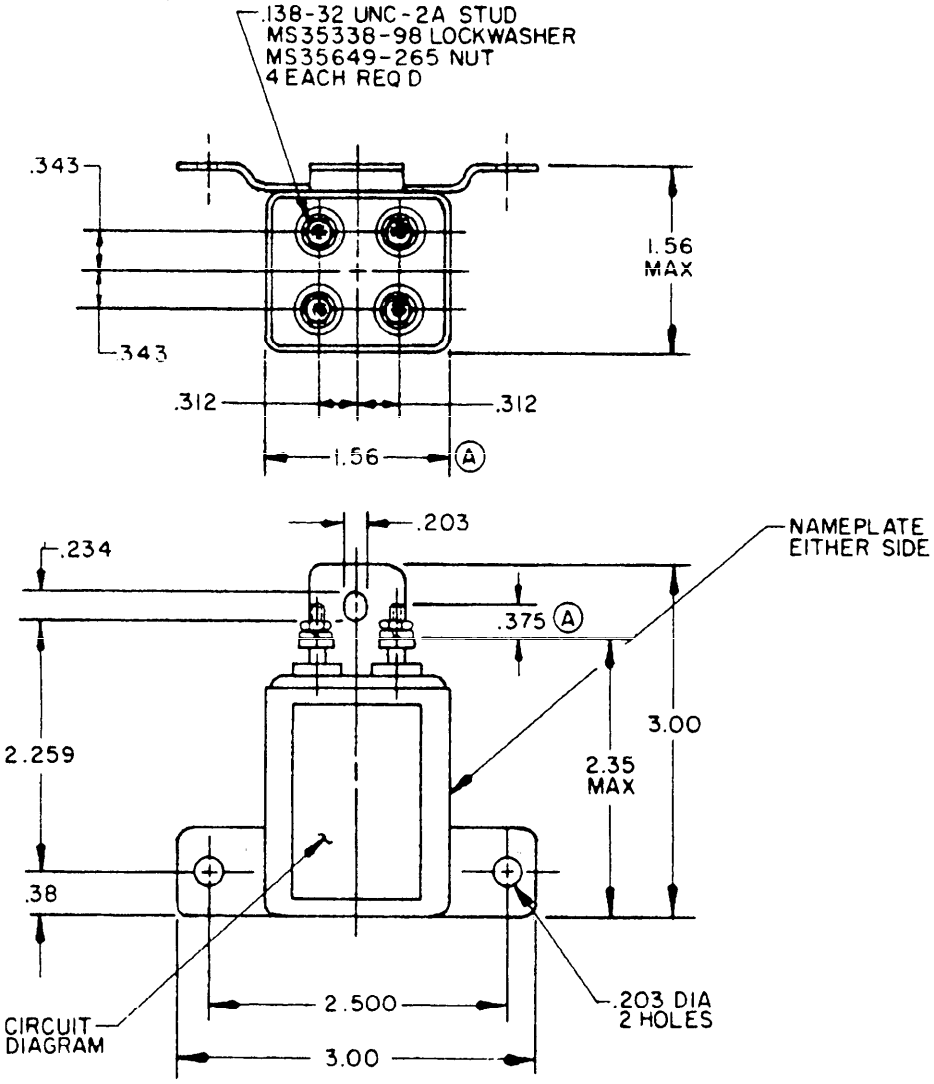


FIGURE 1. Relay, voltage, dc system, sealed.


Ⓐ denotes changes

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:54Z
Check the source to verify that this is the current version before use.



CIRCUIT DIAGRAM

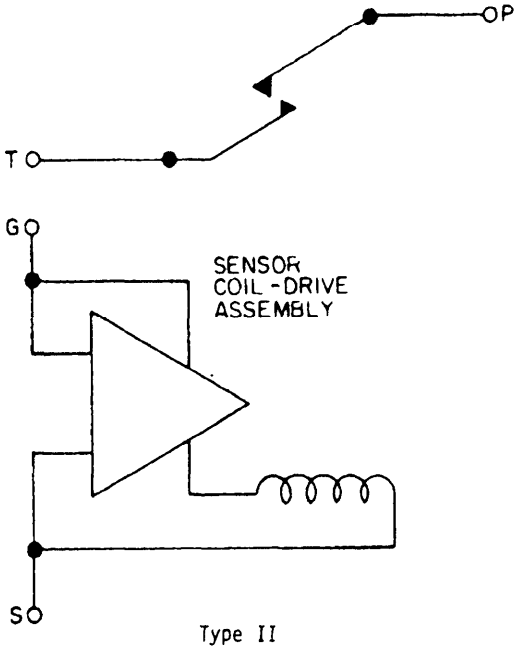

Type II

INCHES	MM	INCHES	MM
.203	5.16	1.56	39.6
.234	5.94	2.259	57.38
.312	7.92	2.35	59.7
.343	8.71	2.500	63.50
.375	9.52	3.00	76.2
.38	9.7		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.03 (.8 mm) for two place decimals.
4. Terminal letters need not appear on the relay header provided there is affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified.

FIGURE 1. Relay, voltage, dc system, sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-20T07:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CONTACT DATA:

Configuration: See figure 1.
Load ratings (relay case grounded):
Inductive: 1.2 amperes inductive at 33 volts.
Inductive overload: 5.5 amperes inductive at 150 Vdc.

COIL DATA:

Duty rating: 28 - 30.9 Vdc continuous.
Intermittent overload: 150 Vdc maximum.

ELECTRICAL DATA:

Pickup voltage: 31 - 33 Vdc
Dielectric withstanding voltage: 1,000 Vrms, 60 Hz for 60 seconds or
1,200 Vrms, 60 Hz for 1 second.

Between all terminals connected together and the case.
Between terminals S and G connected together and terminals T and P.
Between T and P contacts.

ENVIRONMENTAL DATA:

Temperature range: -55° to +71°C

PHYSICAL DATA:

Dimensions and configuration: See figure 1.
Terminal markings: See figure 1.
Weight: 6 ounces maximum.
(A) Seal: Solder, inspect solder seal with a minimum of 2.5 power magnification. If pinholes or voids are present, resolder and reinspect.

PART NUMBER: M26126/2-1

(A) SUPERSESSION DATA: Part number M26126/2-1 supersedes the following:

FSCM	Part number
81349	MIL-R-6467 Type E2
81349	E2
81349	MIL-R-26126
81349	M26126/1-1
81349	RYV - 1/A
96906	MS27780
97054	RE 200-1
74063	TD 800
74063	TD 805 H3
74063	TD 805 H30
74063	TD 805 H4
74063	RYV1A
24446	232B813

Source: https://assist.dla.mil -- Downloaded: 202610-20T07:54Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 85

Review activities:
Army -
Navy -
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5945-0451-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:54Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFLC/LOIE/Standardization
WPAFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-R-26126/2A Relay, Electrical, Overvoltage, Type II, Hybrid, Sealed

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

AFLC/LOIE
WPAFB, OH 45433

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:54Z
Check the source to verify that this is the current version before use.