MILITARY SPECIFICATION

GOGGLES, SUN, GLOBAL SURVIVAL, TYPE MA-1

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a global survival goggle designated type MA-1.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-378	Plastic Sheet and Strip, Thin Gauge, Polyolefin.
L-P-390	Plastic Molding and Extrusion Material, Polyethylene and Copolymers (Low, Medium and High Density)
PPP-B-566	Box, Folding, Paperboard.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-636	Box, Shipping, Fiberboard.

MILITARY

MIL-P-116	Preservation, Methods of.
DOD-D-1000	Drawing, Engineering and Associated List.

STANDARDS

FEDERAL

FED-STD-595	Colors

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: the Engineering Division, San Antonio ALC/MMEDO, Kelly AFB, TX 78241 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-831	Test Reports, Preparation of.

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.1.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 Standard Practice for Commercial Packaging.

* (Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

* 2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), before production is commenced, three first articles of goggles, sun, global survival, type MA-1, shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the first articles authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first articles shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials.

3.2.1 Frame, headband strap and retaining ring. The material for the frame, headband strap and retaining ring shall be polyethylene conforming to type I, class L, grade 2 of L-P-390. The plastic shall be virgin material and contain no regrinds of previously worked material.

3.2.2 Headband. The headband shall be coiled monofilament nylon, .050 diameter, 7 inches long after coiling, which will stretch to 14 inches, and return to its original 7 inches without taking a permanent set.

3.2.3 Lens. The lenses shall be constructed of cellulose acetate butyrate. The lens thickness shall be 0.030 inch, plus 0.003 minus 0.002 inch. The exterior surface of each lens shall be treated with an abrasion resistant coating comprised of polytetraethyleneglycol dimetha crylate containing a small percentage of cellulose nitrate or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

3.2.4 Case. The case for the goggles shall be made from 0.004 inch thick essentially colorless polyolefin conforming to type I, grade A, B, or C, finish 1 of L-P-378.

3.3 Design and construction.

3.3.1 Frame. The frame shall be constructed in accordance with figure 1. The facial contact surface shall be shaped to fit the face around the entire periphery of the frame.

3.3.1.1 Ventilating holes. The frame shall be provided with ventilating holes as shown in figures 1 and 7.

3.3.1.2 Perforations. The frame shall be provided with perforations at the extreme temporal ends to receive the headband strap. See figures 1 and 7.

3.3.2 Retaining ring. The retaining ring shall be in conformance with figure 2.

3.3.3 Headband. The headband shall be constructed in accordance with figure 3 and shall be self-adjustable with additional adjustment in the headband strap.

3.3.4 Headband strap. The headband strap shall conform to figure 4.

3.3.5 Lens. The lens shall be cut to the dimension shown in figure 5 and perforated to accommodate the retaining ring. All perforation dimensions shall be spaced as shown in figure 2 with a plus allowance of .002 on the hole diameter. Each lens shall be a 6 $\pm$1/8 diopter curvature and shall conform to the configuration as shown in figure 5.

3.3.6 Case. The goggle shall be folded and placed in the case as shown in figure 6. The case shall have a vacuum of at least 20 inches of mercury applied before heat-sealing it shut.

3.3.7 General configuration. The overall general design of the goggle shall conform to figure 7.

3.4 Performance.

3.4.1 Matching. The right lens and left lens of each goggle shall be matched in total transmission to within 20 percent of the transmission of the higher of the pair as measured in section 4.

3.4.2 Low temperature test. The frame shall be pliable and shall not crack or break when tested as specified in 4.5.3.

3.4.3 High temperature test. The frame shall not show signs of tackiness or other unsatisfactory characteristics when tested as specified in 4.5.4.

3.4.4 Refractive power and prismatic deviation. The refractive power of the lenses measured at point "O" indicated in figure 5 when tested as specified in 4.5.5 and in a direction within 5 degrees of the normal to the surface, shall not exceed plus or minus 0.25 diopter in any meridian. Neither the vertical nor the horizontal prismatic deviation shall exceed 1/8 prism diopter

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

when measured at point "0" with the lens tipped in order to make the same angle with the axis of the instrument, that it would make with the straight-ahead line of sight when worn in a frame.

3.4.5 Lens defects. When tested as specified in 4.5.6, each lens shall be free from bubbles, imbedded particles, and defects which cause more than five minutes angular deviation of incident light normal to the surface.

3.4.6 Spectral transmission.

3.4.6.1 Neutral lenses - color and polarization characteristics. The daylight transmission of the lens shall be a minimum of 15 percent and a maximum of 30 percent. The plane of polarization of the lens material shall lie parallel to the horizontal centerline of the lens. Polarization shall be neutral in color, and two lenses when crossed with each other shall transmit less than 0.2 percent visible light.

3.4.6.1.1 The erythemal ultraviolet transmittance of all the lenses of the goggles shall be less than the value given in Table I for the corresponding type, when computed as the average spectral transmittance at wave lengths of 290, 300, 310, and 320 millimicrons.

TABLE I. Limiting values of trasmittance and chromaticity.

	PERCENT TRANSMITTANCE	
	Erythemal Ultraviolet	Daylight
Neutral Lenses Maximum Minimum	1.0	 30 15

3.5 Color. The frame shall approximate the green color conforming to shade 14159 of FED-STD-595.

3.6 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The drawing number requirements of DOD-D-1000 shall govern changes in the manufacturer's part numbers.

3.7 Workmanship. The goggles shall be constructed in accordance with good commercial practice and shall be free from any defect that might affect appearance or functionability.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection. When required, inspection and testing of the first article sample shall be made of one or more completely fabricated sun goggles and cases for all provisions of this specification applicable to end product examination and tests.

4.3 First article testing.

4.3.1 First article test sample tested by the contractor. The contractor shall subject five pair of goggles to the first article tests specified in 4.3.4.

4.3.2 First article test report. After the contractor completes the first article tests, he shall prepare a test report according to MIL-STD-831 and furnish three complete copies of the report to the procuring activity.

4.3.3 First article test sample for the procuring activity. Along with the test report, the contractor shall submit three samples to the procuring activity.

4.3.4 First article tests. First article tests shall consist of all tests described under 4.5.

4.4 Sampling for inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and material inspection.

4.4.1.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawings, inspection shall be performed on components and materials listed in Table II for test characteristics shown.

NOTE: Atmospheric conditions. Unless otherwise specified, the conditioning period prior to test shall be 48 hours; the atmospheric conditions shall be 73.5 $\pm 2^{\circ}$ Fahrenheit (F), and 50 ± 4 percent relative humidity.

4.4.1.2 Certification of compliance. Components and materials listed below may be accepted on the basis of a contractor's certification of compliance for requirements specified in applicable paragraphs of this specification. The certificate of compliance shall be accomplished by actual test, inspection or other verifiable data.

Component	Characteristic
Frame Material	Material Identification and Virgin Stock (not previously worked) (see 3.2.1).
Headband Strap	Material Identification and Virgin Stock (not previously worked) (see 3.2.1).
Retaining Ring	Material Identification and Virgin Stock (not previously worked) (see 3.2.1).
Headband	Material Identification, Type, Color and Diameter (see 3.2.2).
Lens	Material Identification (see 3.2.3). Identification of Abrasion Resistant Coating (see 3.2.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

TABLE II. Component tests.

Component and lot expressed in terms of	Characteristic	Rqmt para	Test method	Rqmt appl to ind unit	Rqmt appl to lot avg	#Determ per spl unit	Results rptd as	Spl unit	Insp level	AQL
Lens(one pair)	Thickness	3.2.3	Std com'l	X		6	Avg of 3 det per lens to nearest .0001 inch	1 pr. lenses	S-2	6.5
	Curvature	3.3.5	Std com'l	X		3 each lens	To nearest 1/8 diopter		S-2	0.65
	Refractive power	3.4.4	4.5.5	X		4 each lens	Refractive power to nearest 0.01 diopter		S-2	0.65
	Prismatic deviation (horizontal and vertical)	3.4.4	4.5.5	X		2 each lens	Pass or fail		S-2	0.65
	Lens defects	3.4.5	4.5.6	X		1 each lens	Pass or fail		S-2	0.65
	Spectral transmission									
	Daylight transmission	3.4.6.1 & 3.4.6.1.1	Beckman DU spectro-photo-meter or equal	X		1 each lens	To nearest 0.1 percent		S-2	0.65
	Erythemal ultra violet transmittance	3.4.6.1.1		X		1 each lens	To nearest .01 percent		S-2	0.65
	Polarization	3.4.6.1	Std com'l	X		1 each lens	Pass or fail		S-2	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

TABLE II. Component tests - Continued.

Component and lot expressed in terms of	Characteristic	Rqmt para	Test method	Rqmt appl to: ind unit	Rqmt appl to: lot avg	#Determ per spl unit	Results rptd as	Spl unit	Insp level	AQL
	Transmission of crossed lenses	3.4.6.1	Beckman DU Spectro-photo-meter or equal	X		1 each lens	To nearest 0.01 percent		S-2	0.65
	Plane of polorization	3.4.6.1	Std com'l	X		1 each lens	Pass or fail		S-2	0.65
Frame (1 Frame)	Low temperature	3.4.2	4.5.3	X		1	Pass or fail	1 Frame	S-1	6.5
	High temperature	3.4.3	4.5.4	X		1	Pass or fail	1 Frame	S-1	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operation or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the specification requirements:

Requirement, operation or assembly
Vacuum sealing of case (see 3.3.6)

4.4.3 End item examination. The defects found during visual examination shall be classified in accordance with 4.4.3.1, 4.4.3.2 and 4.4.3.3. The lots shall be inspected in accordance with 4.4.3.4. The lot size shall be the number of pairs of goggles with cases in the inspection lot. The sample unit shall be one pair of goggles with case.

4.4.3.1 Visual examination. The completed fabricated goggles, sun, global survival, type MA-1 shall be examined for defects in Tables III and IV.

4.4.3.2 Examination of goggles for defects in dimensions. Any dimension that is not within the specified tolerances shall be classified as a defect.

4.4.3.3 Inspection levels and acceptable quality levels (AQL's).

	Inspection level	AQL	
		Major	Total
For defects applicable to Table III	II	2.5	10.0
For defects applicable to 4.4.3.2	S-3	(one class)	4.0
For defects applicable to Table IV	S-3	(one class)	4.0

4.4.3.4 End item testing. Testing of the completely fabricated goggles shall be performed in accordance with Table V for the characteristics shown therein. The sample unit shall be one pair of goggles. Each pair of goggles in the sample, selected for visual examination, shall be tested. Verification samples shall be drawn in accordance with inspection Level S-2 and an AQL of 2.5.

4.4.4 Examination of preparation for delivery. An examination shall be made to determine that markings, materials, workmanship and contents comply with the requirements of section 5 of this specification. The sample unit shall be one shipping container, fully packed, selected just prior to the closing operation. Closed shipping containers shall be examined for closure defects. The lot size shall be the number of shipping containers submitted for acceptance at one time. The inspection level shall be S-2 and the AQL shall be 2.5 expressed in defects per hundred units. Inspection of preparation for delivery shall be in accordance with Table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for general visual characteristics.

Examine	Defect	Major	Minor
Sealed case (with goggles)	Case is not vacuum sealed, e.g., evidence that air was not exhausted prior to sealing.		X
	Case is not fabricated of the specified Material.		X
	Not natural color (essentially colorless)		X
	Tear, cut, hole, crack or break.	X	
	Heat seal is not continuous.	X	
	Case is too small to accommodate goggles.	X	
	Case is too large.		X
	Blister, bubble, pimple, pit, gouge, or other imperfection in case.		X
	Stain, dirt or foreign matter.		X
Goggles (removed from case)			
Lens	Missing	X	
	Broken or cracked.	X	
	Any lens not polarized.	X	
	Undulation, lenticulation, or any deep scratch.	X	
	Any delamination.	X	
	Bubble, seed, hairline scratch, stain or other imperfection at the optical center of the lens.	X	
	Bubble, seed, or stain outside the optical center of the lens.		*
	Any hairline scratch (outside the optical center) more than 1/8 inch long.		X
	Unspecified hole.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for general visual characteristics - Continued.

Examine	Defect	Major	Minor
Goggles (removed from case)			
Lens	Color or shade not as specified.	*	
	Lens is not transparent, or is not optically clear.	X	
	Any chip more than 1/64 inch from the edge of the lens.	X	
	Any chip extending more than 1/16 inch along the edge of the lens.	X	
	Chip 1/64 inch, or less from the edge of the lens.		X
	Chip extending 1/16 inch or less along the edge of the lens.		X
	Three or more chips 1/64 inch or less from the edge or extending less than 1/16 inch along the edge of the lens.	X	
	Not clean		X
Frame (including headband strap, headband and retaining rings)	Overall design is not as specified	X	
	Design of any component is not as specified.	*	
	Not specified color.		X
	Not fabricated of specified material.	X	
	Component missing.	X	
	Unspecified hole.	*	
	Component torn, cut, cracked or broken.	X	
	Component wrinkled, creased, gouged, or Scratched.	*	
	Bubble or blister.		X
	Component malformed, bent out of shape or is otherwise impaired after goggles are removed from case.	*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for general visual characteristics - Continued.

Examine	Defect	Major	Minor
Frame (including headband strap, headband and retaining rings)	Pattern of ventilating holes is not as specified.		X
	Ventilating holes are not specified size.		X
	10 or more ventilating holes not completely through frame.	X	
	Less than 10 ventilating holes not completely through frame.		X
	More than 244 ventilating holes on either side of frame.		X
	Less than 244 ventilating holes but more than 234 ventilating holes on eith side of frame.		X
	Less than 235 ventilating holes on either side of frame.	X	
	Frame is not perforated to receive the headband strap.	X	
	Perforation is not in the specified location.		*
	Sharp edge, burr or sliver.		*
Assembly	Not securely assembled.	X	
	Lens is not secured through holes in frame.	X	
	More or less than 19 holes (for securing each lens).		X
	Holes are not spaced as specified.		X
	Hole is not specified diameter.		X
	Lens does not fit frame and retaining ring.	X	

* Defects so designated shall be classified as Major when seriously affecting serviceability or appearance and as Minor when affecting serviceability or appearance, but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Examination of goggles for fit.

Examine	Defect
Goggles	Do not fit the face around the entire periphery of the frame. Admits light other than through lenses (excluding side light from ventilating holes). Pressure exerted on contact points (e.g., nose, forehead, etc.) Headband is not self-adjustable. Additional adjustment of the headband is not provided.

TABLE V. Testing of goggles.

Characteristic	Rqmt para	Test method	#Det per spl unit	Results rptd as	AQL
			2		
Matching	3.4.1	4.5.2	1 right lens 1 left lens	pass or fail	0.25

TABLE VI. Inspection of preparation for delivery.

Examine	Defect
Markings (exterior and interior)	Incorrect; incomplete; illegible; omitted; of improper size, location sequence, or method of application.
Materials	Any nonconforming component; component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of components: such as incomplete closure of case liners, container flaps, loose or inadequate sealing, strapping or stapling; bulging or distorted containers.
Preservation	Nonsealing of protective envelope.
Contents	Number of intermediate packages per shipping container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

4.5 Test methods.

4.5.1 Examination of product. Unless otherwise specified by the procuring activity, each pair of goggles shall be examined to determine conformance with the requirements of this specification with respect to material and workmanship.

4.5.2 Matching. Matching of lenses to meet the total visible transmission requirements shall be determined by a Hunter Haze Meter or similar instrument.

4.5.3 Low temperature test. The sample frames shall be placed in a cold chamber maintained at a temperature of minus 40°F, plus or minus 5°F, for a period of 4 hours. The frames shall be observed for pliability of the material, and shall not crack or break when slowly bent 180° in the side (temple) area, while still at this temperature, around a 1/4 inch mandrel. Cracking or breaking under these conditions will be cause for rejection.

4.5.4 High temperature test. The sample frames shall be placed in an oven maintained at a temperature of not less than 140°F for a period of 8 hours. The frames shall be examined for tackiness or other unsatisfactory characteristics. Any evidence of tackiness or other unsatisfactory characteristics will be cause for rejection.

4.5.5 Refractive power and prismatic deviation. To test the lens and prism power, a telescope, lensometer, projection lantern, or other suitable instrument shall be used. The instrument shall include a target which may be brought into sharp focus, as observed through an eyepiece or projected upon a screen, and an aperture not over one centimeter in diameter fixed at a definite position along the axis of the optical system. The design of the instrument shall be such that the lens power and prism power may be determined to within 0.03 diopter. The refractive power shall be determined by focusing the instrument. The prism power shall be measured by displacement of the reference mark. Failure of the lens to meet this test will be cause for rejection.

4.5.6 Lens defects. Bubbles, striae, imbedded particles, and other irregularities affecting the optical quality of the lens shall be observed by moving the lens in front of the aperture of a telescope, lensometer, projection lantern, or other suitable instrument in such a way that the target is observed successively through all parts of the lens. Sudden jumps or blurring of the image indicate lens defects that must be checked to insure that they are within tolerances. Failure of the lens to meet this test will be cause for rejection.

4.5.7 Special transmission. The daylight transmittance of the lenses shall be determined by measuring the spectral distribution of the transmitted light, and computing the luminous transmittance. The Beckman DU or equivalent spectrophotometer shall be used. The transmission shall be computed for a sample thickness of 0.030 inches.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

* 5.1.1 Level A. Each goggle shall be preserved method III of MIL-P-116 and placed in a paperboard box conforming to PPP-B-566.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. Each goggle shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A. A quantity of goggles preserved as specified in 5.1, shall be packed in a wood, cleated-plywood shipping container conforming to PPP-B-601, overseas type, style A, grade A. Insofar as practical, containers shall be uniform in shape and size, contain identical quantities and be of minimum cube and tare consistent with the protection required. Container closure and strapping shall be in accordance with the appendix to PPP-B-601.

5.2.2 Level B. A quantity of goggles preserved as specified in 5.1, shall be packed in a wood, cleated-plywood shipping container conforming to PPP-B-601, domestic type style A, grade B or a fiberboard shipping container conforming to PPP-B-636, class weather resistant, type optional. Insofar as practical, containers shall be uniform in shape and size, contain identical quantities and be of minimum cube and tare consistent with the protection required. Container closure and strapping shall be in accordance with the appendix to the box specification.

5.2.3 Commercial. A quantity of goggles preserved as specified in 5.1 shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs, and shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951 as applicable.

6. NOTES

6.1 Intended use. These goggles are intended for use as a component of survival kits which will be used in the Arctic against snow blindness, wind driven snow, or in the desert for protection against wind driven sand and excessive solar radiation.

* 6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. Selection of applicable levels of preservation and packaging (see 5.1 and 5.2).

c. Whether first article is required (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

* 6.3 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 99

Review activity:
Air Force - 85
DLA - CT

User activity:
Air Force - 45

Preparing activity:
Air Force - 82

(Project 8465-F892)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

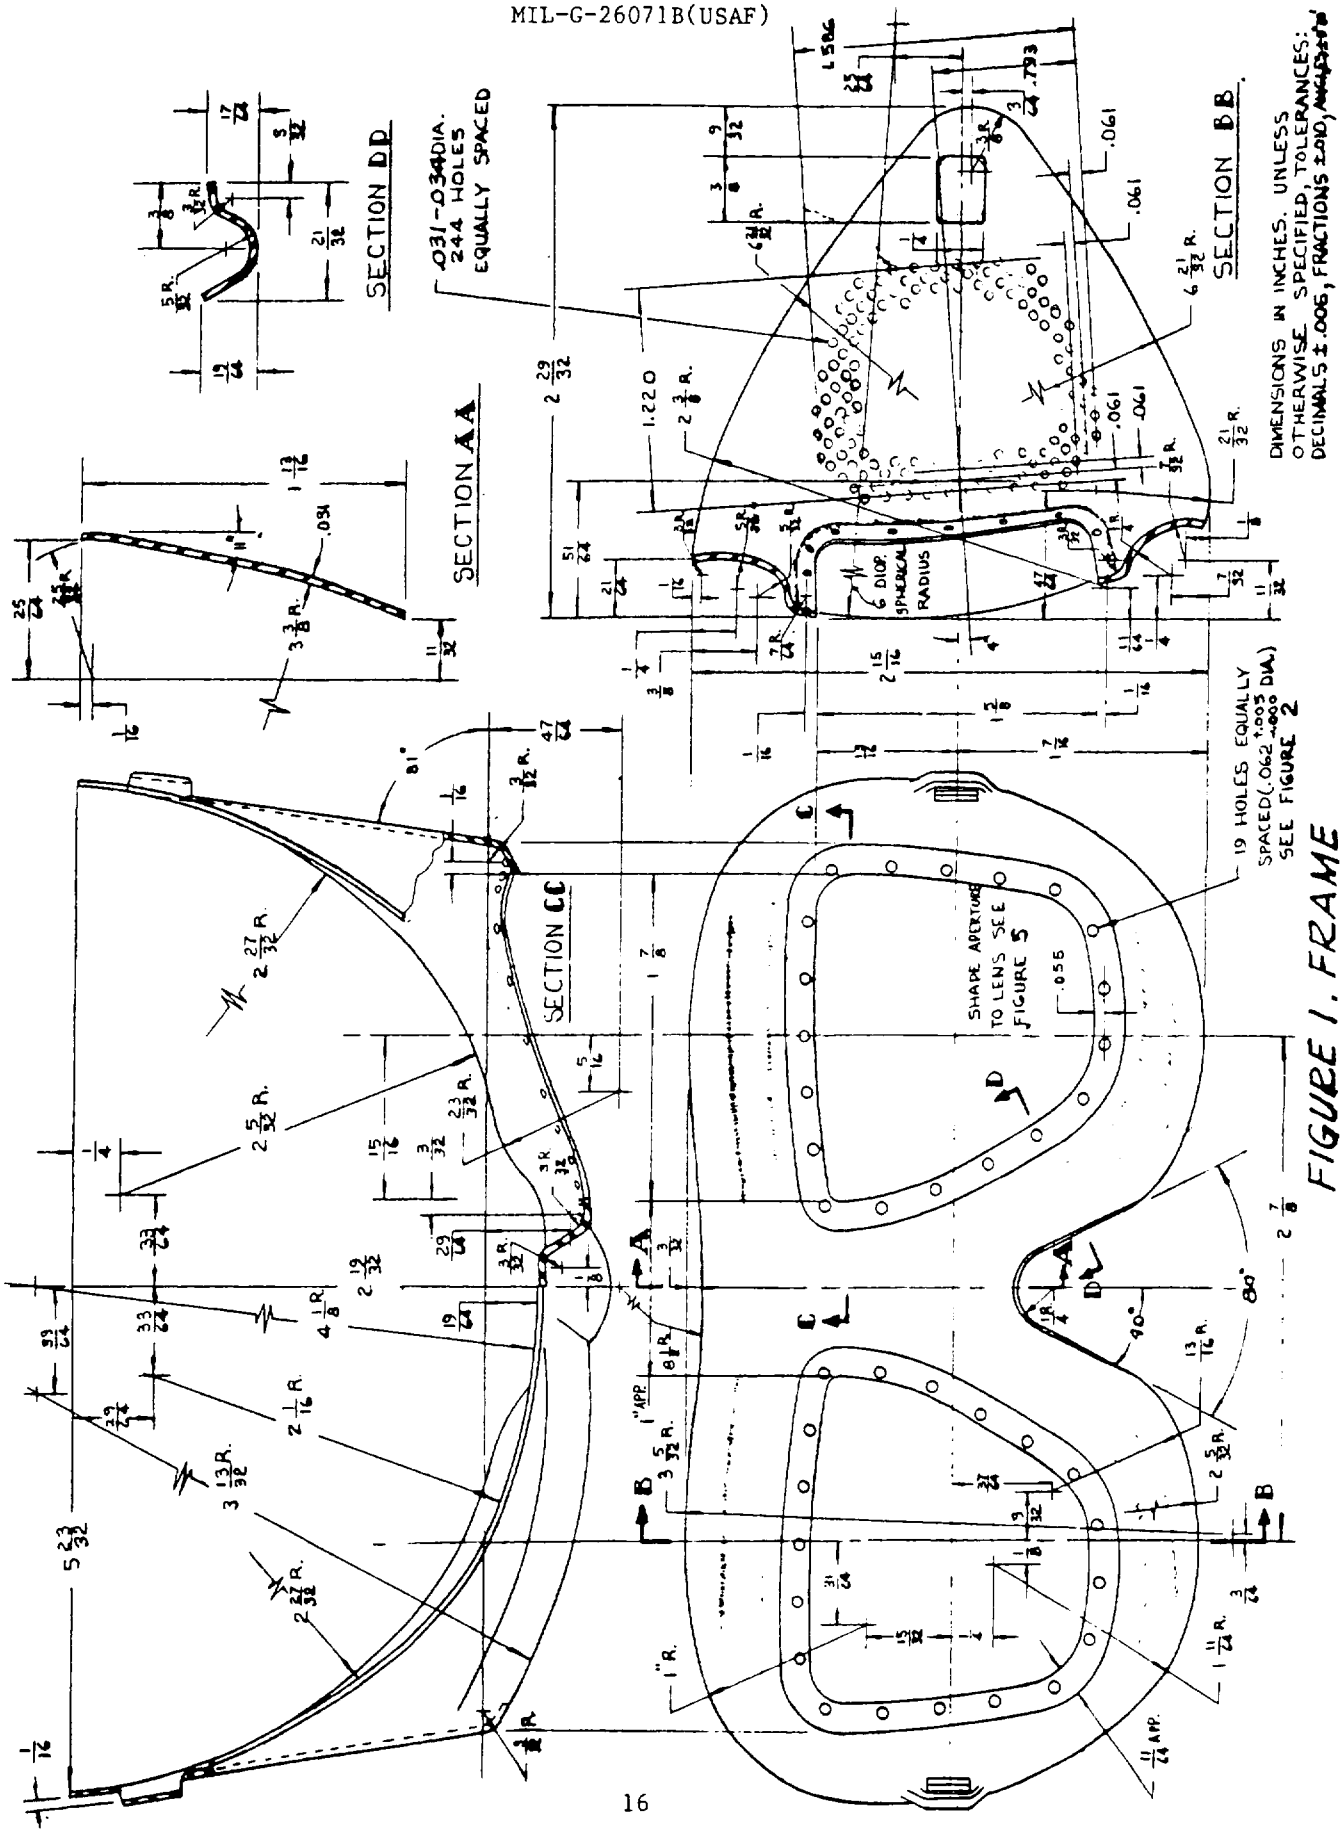


FIGURE 1. FRAME

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.


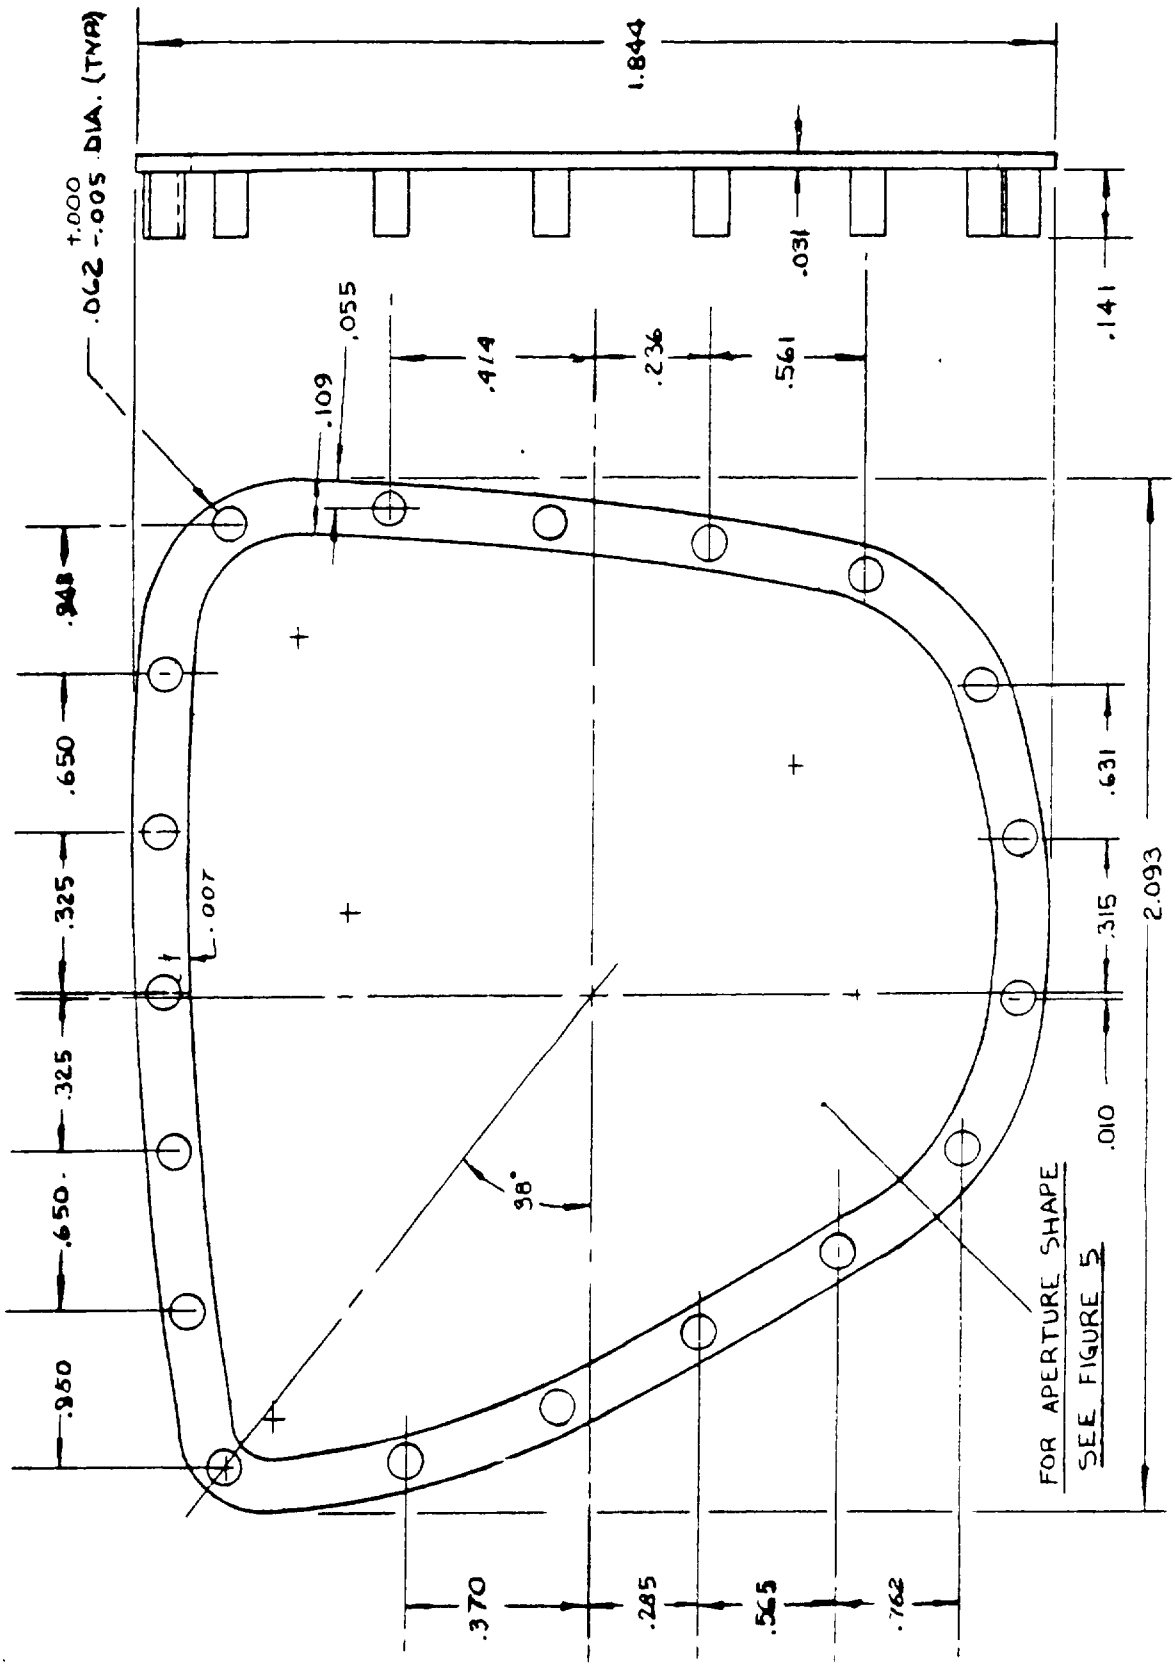


FIGURE 2. RETAINING RING.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

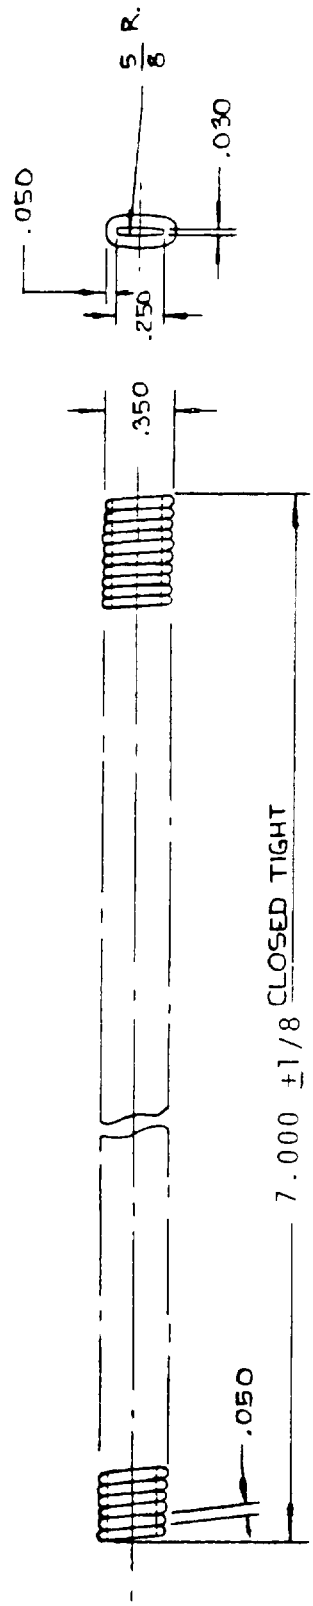

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON FRACTIONS±.010 DECIMALS±.005 ANGLES.

FIGURE 3. HEADBAND STRAP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

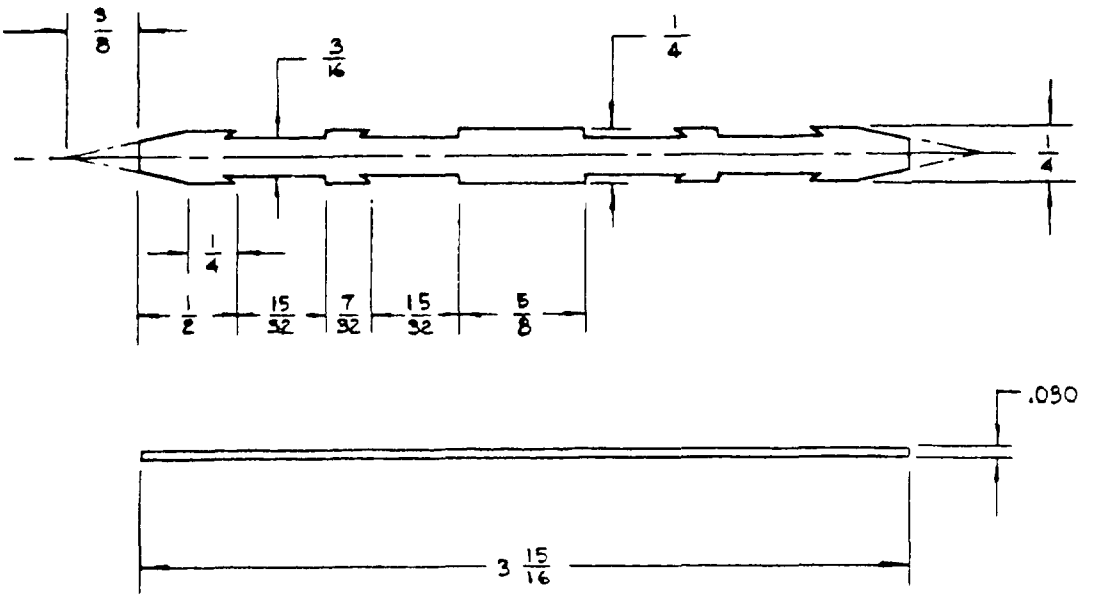

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON FRACTIONS ±.010 DECIMALS ±.005 ANGLES.

FIGURE 4. HEADBAND STRAP

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.


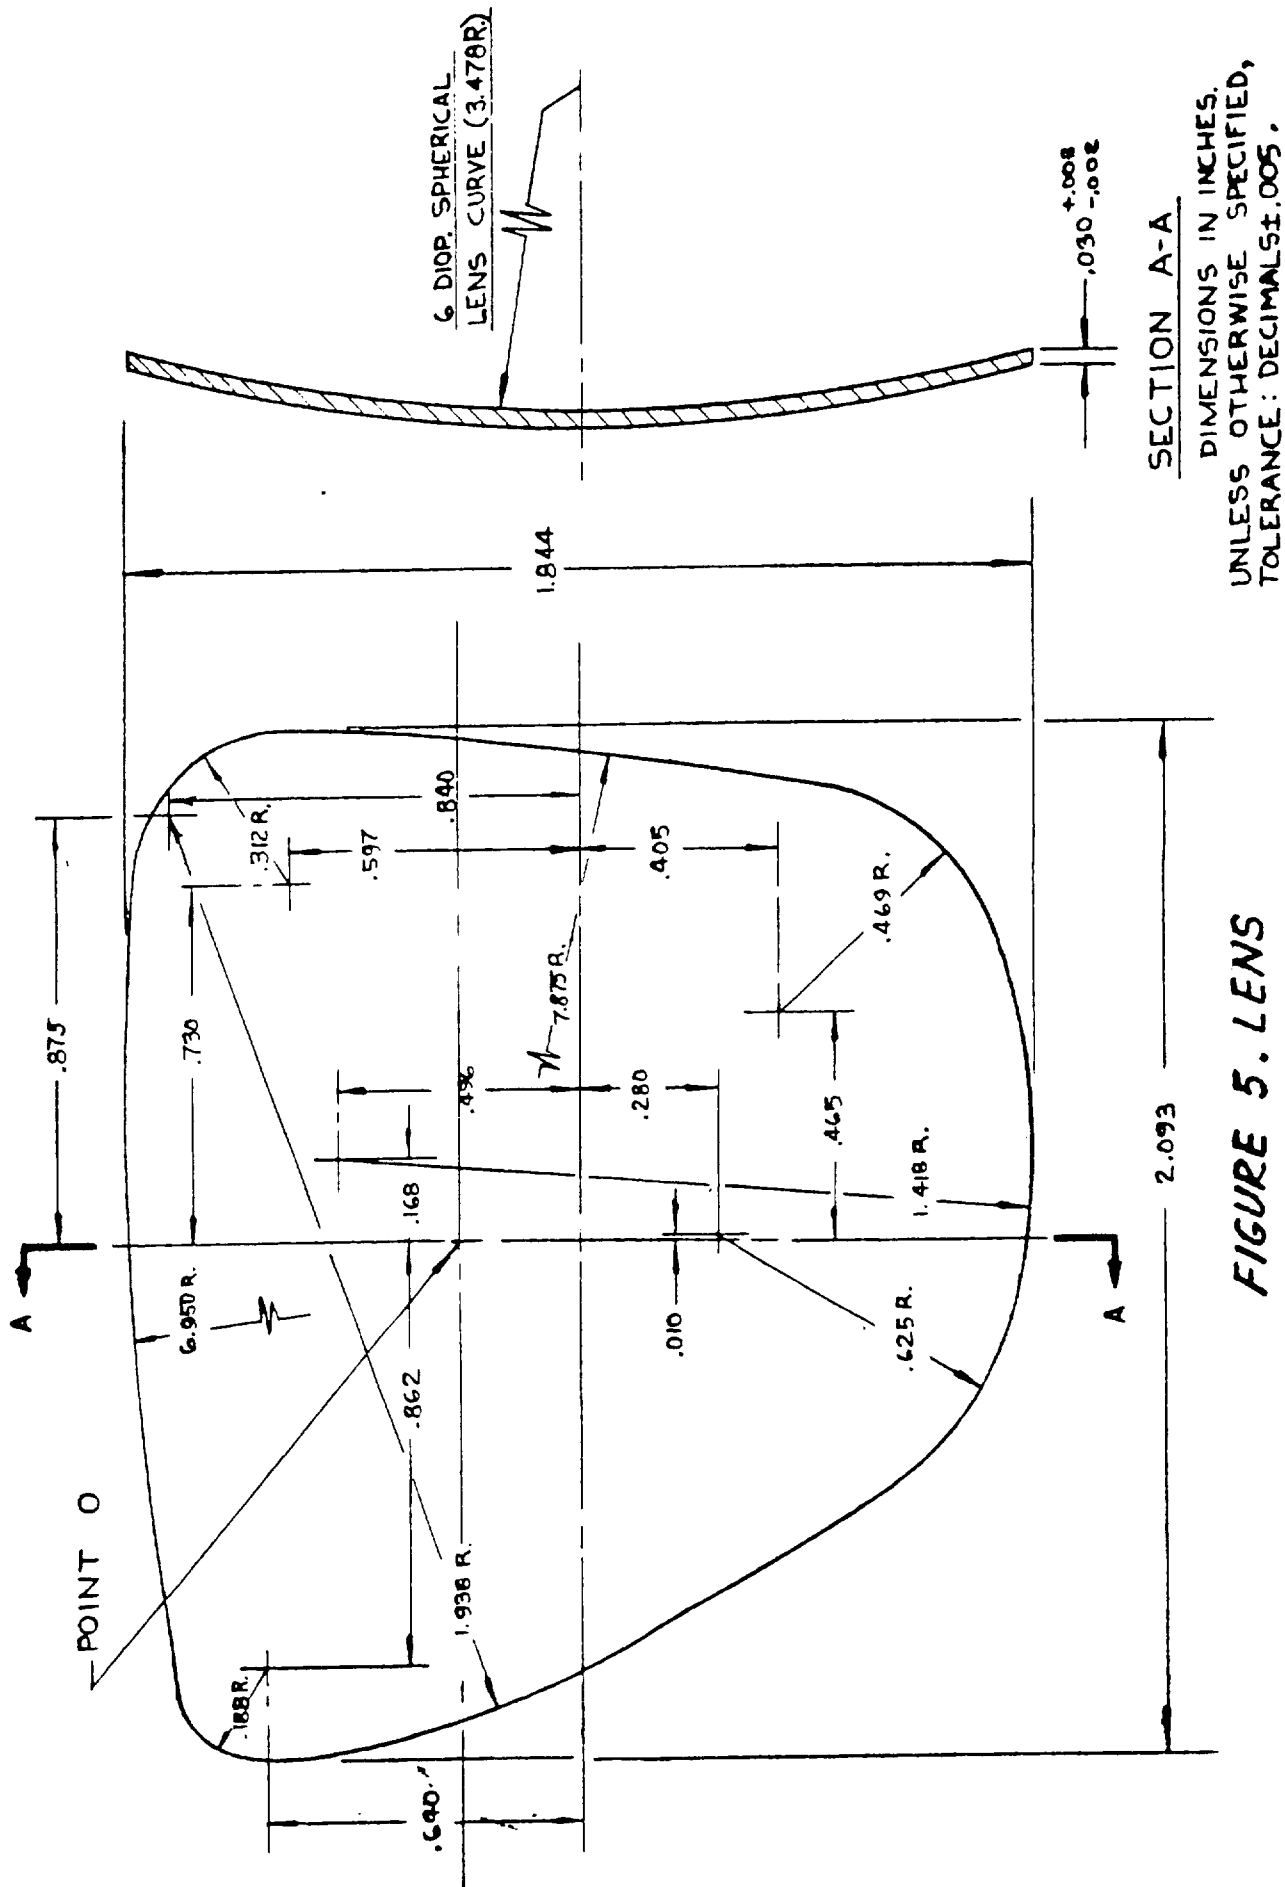


FIGURE 5. LENS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

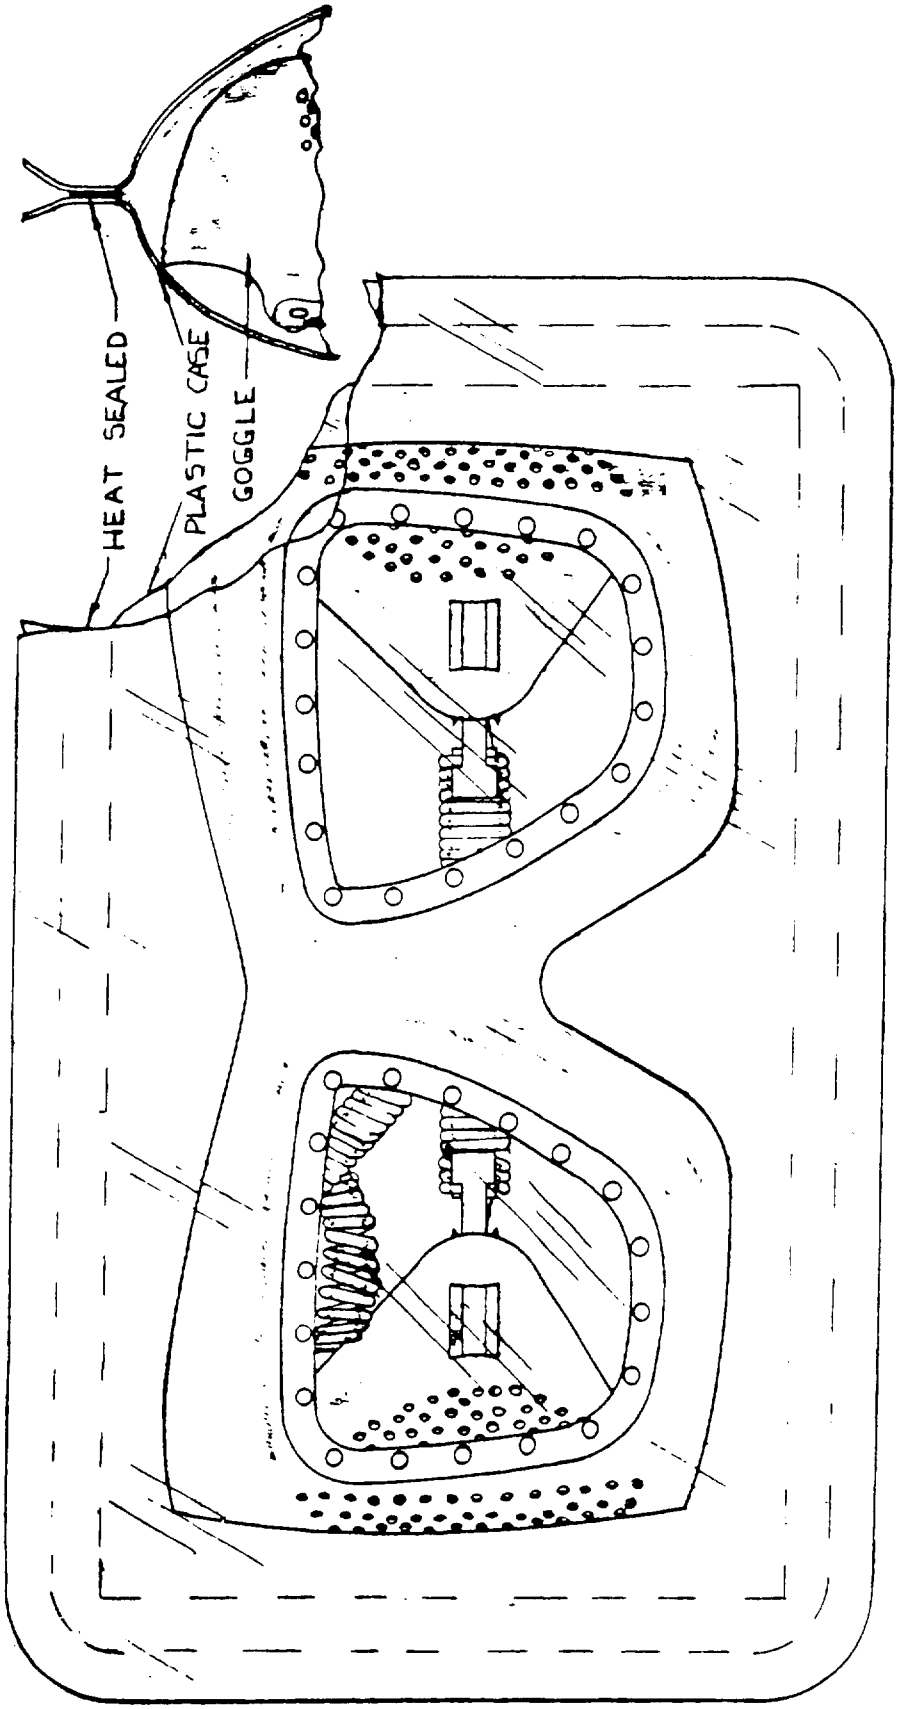

NOTE:
AS AN ALTERNATE CONSTRUCTION, THE CASE MAY BE FABRICATED FROM LAY FLAT TUBING OF MATERIAL SPECIFIED IN 3.3.6, WITH HEAT SEAL ACROSS EACH END.

FIGURE 6. CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

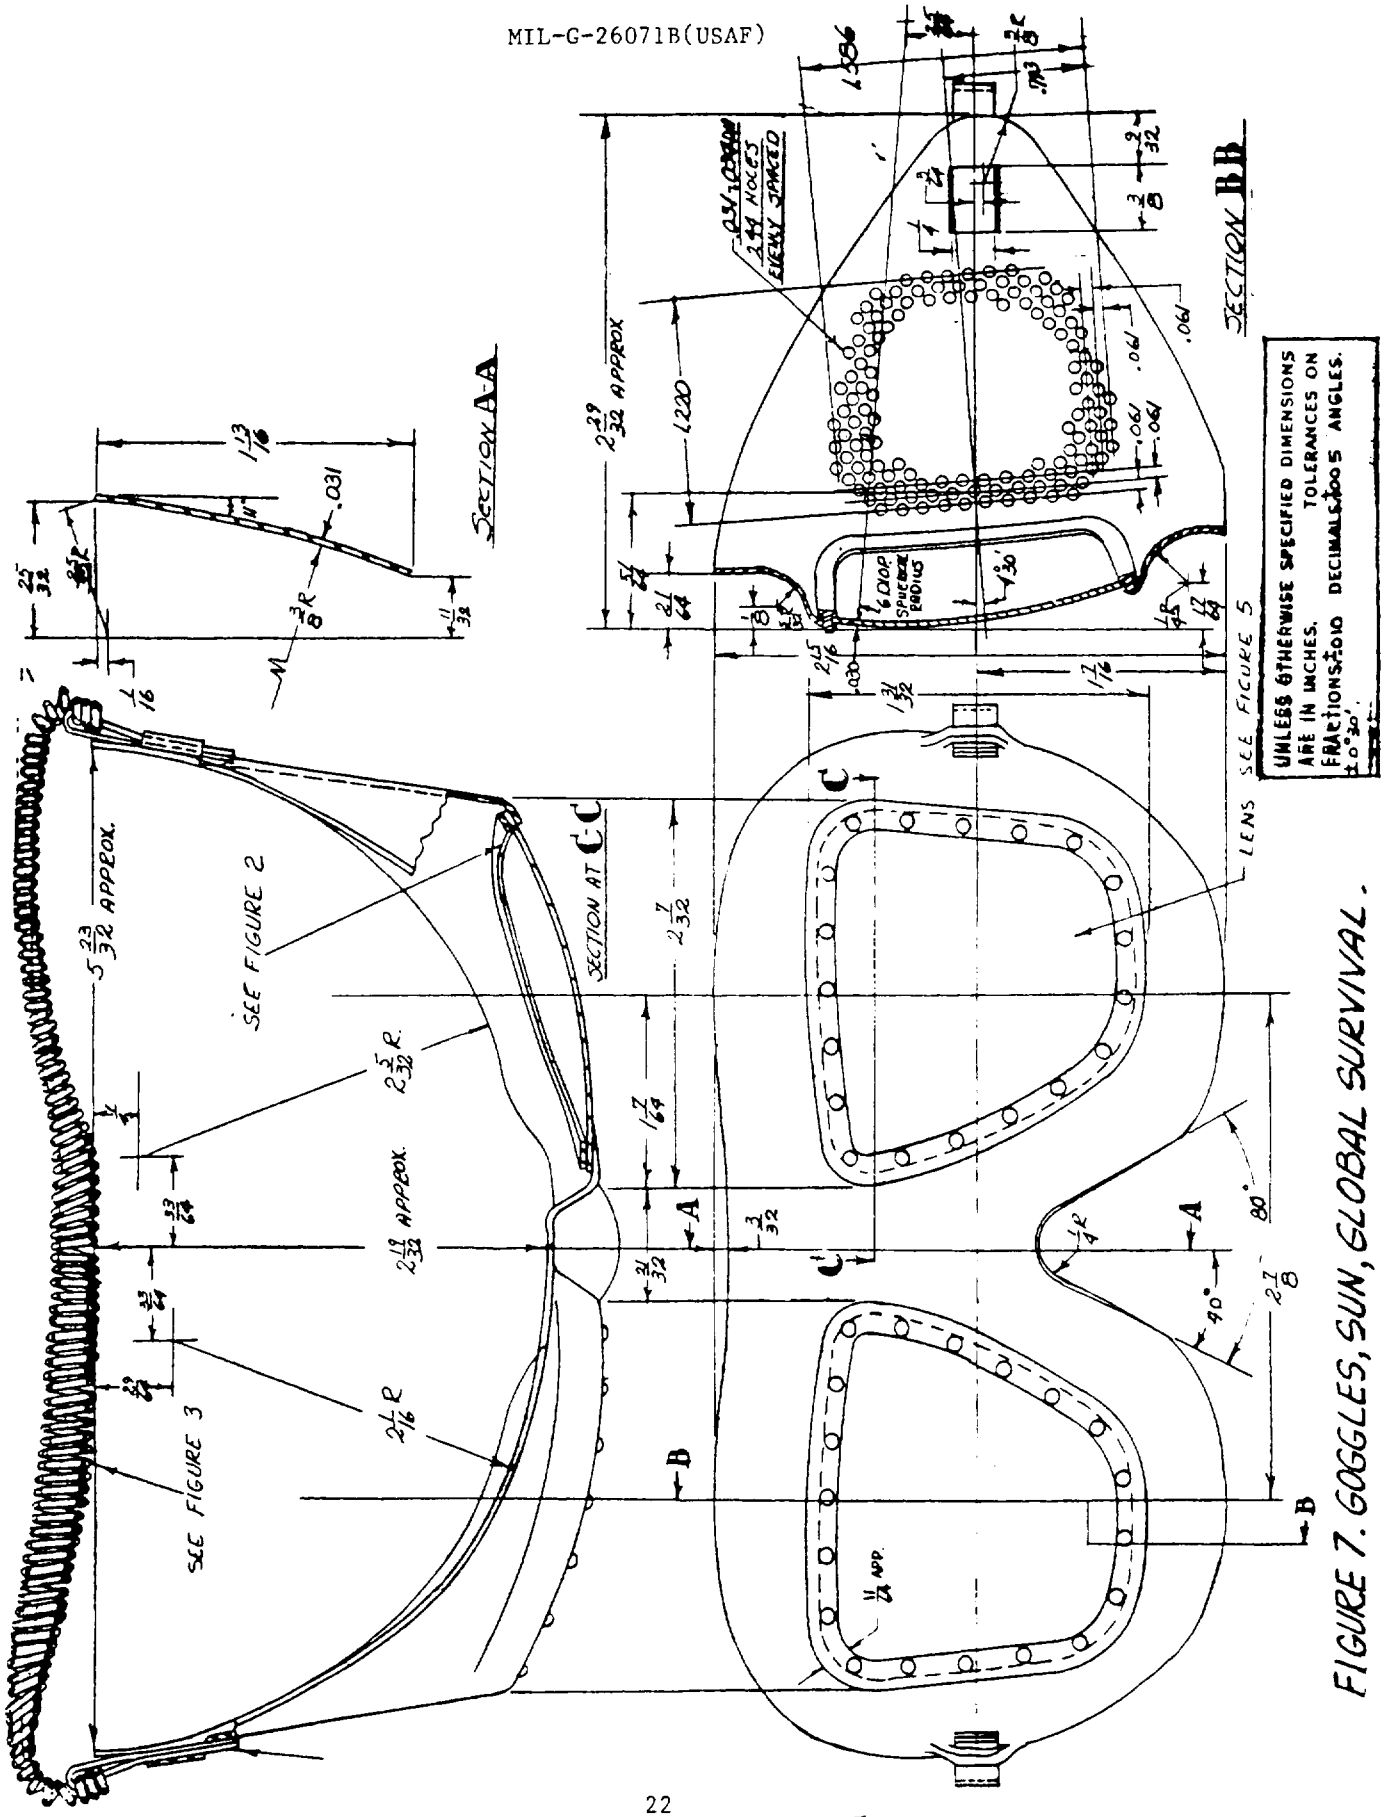


FIGURE 7. GOGGLES, SUN, GLOBAL SURVIVAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Engineering Division
San Antonio ALC/MMEDO
Kelly AFB, TX 78241

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:49Z
Check the source to verify that this is the current version before use.