
NAVAER 1000A (Rev. 4-56)

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

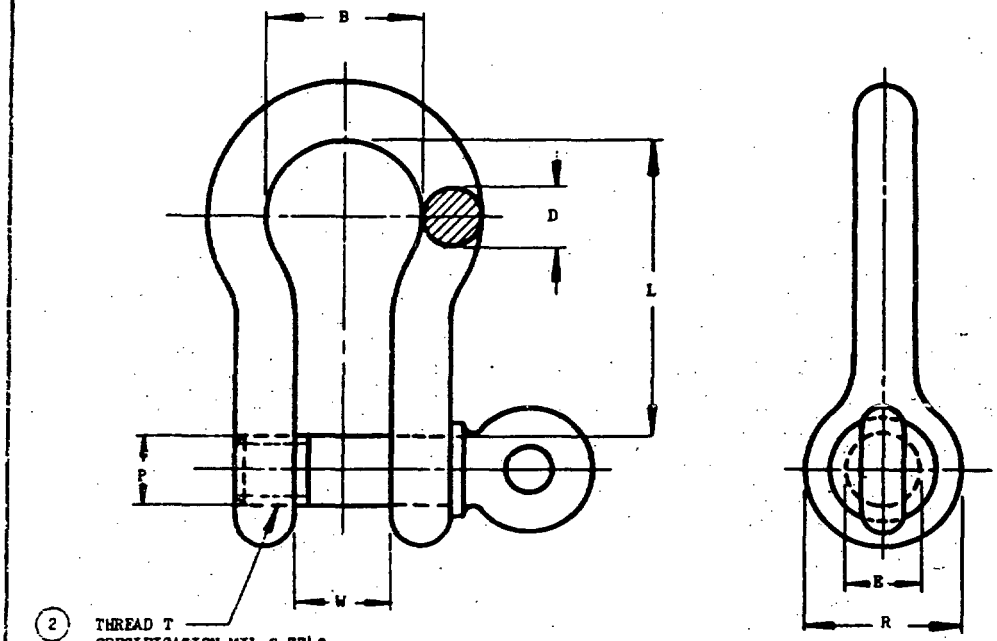

AN PART NUMBER	(2) BREAKING STRENGTH MIN LB (REF)	(2) B BOW WIDTH		D MIN DIA	(2) E INSIDE DIA UNTHREADED EYE		(2) L INSIDE LENGTH		(2) P PIN DIA		(2) R OUTSIDE DIA EYE		(2) THREAD T		(2) W WIDTH BETWEEN EYES		WT LB APPROX
AN116-3	2 600	.625		.188	.281	±.016	.875		.250	+.016 -.000	.594		1/4 -20		.375		.08
AN116-4	3 550	.750		.250	.375		1.125		.312		.719		5/16-18		.469	±.031	.12
AN116-5	5 300	.875	±.062	.312	.438		1.250	±.062	.375		.875		3/8 -16		.531		.21
AN116-6	7 950	1.031		.375	.500		1.438		.438		1.000		7/16-14		.656		.32
(a) AN116-7	10 850	1.188		.438	.562		1.688		.500		1.125		1/2 -13		.719		.49
AN116-8	14 150	1.312		.500	.688		1.938		.625		1.312		5/8 -11		.812		.73
(a) AN116-9	17 900	1.500		.562			2.125				1.438			UNC-2A UNC-2B	.875		.92
AN116-10	22 100	1.688	±.125	.625	.812	±.031	2.500	±.125	.750		1.625		3/4 -10		1.062		1.51
AN116-12	31 800	1.938		.750	.938		3.000		.875		1.875	±.062	7/8 -9		1.250		2.26
AN116-14	43 250	2.250		.875	1.062		3.250		1.000	+.031 -.000	2.062		1 -8		1.438	±.062	3.40
AN116-16	56 550	2.625	±.188	1.000	1.188		3.750		1.125		2.438		1-1/8 -7		1.688		4.95
AN116-18	66 800	2.875		1.125	1.312		4.250		1.250		2.688		1-1/4 -7		1.812		6.91
AN116-20	82 500	3.188		1.250	1.438		4.500		1.375		3.000		1-3/8 -6		2.000		8.99
AN116-22	99 800	3.562		1.375	1.562		5.250	±.250	1.500		3.312		1-1/2 -6		2.250		12.19
AN116-24	118 700	3.812	±.250	1.500	1.688	+.062 -.031	5.750		1.625		3.562		1-5/8 -5-1/2	NS-2A NS-2B	2.375	±.125	15.95
AN116-26	139 500	4.438		1.625	1.812		6.250		1.750		3.812		1-3/4 -5		2.625		19.10
AN116-28	161 600	4.875		1.750	2.094	±.062	7.000		2.000		4.062		2 -4-1/2	UNC-2A UNC-2B	2.875		27.50
AN116-32	211 100	5.562		2.000	2.344		7.750		2.250		4.625	±.125	2-1/4 -4-1/2		3.250		39.00

(2) (a) AN PART NUMBERS AN116-7 AND AN116-9 INACTIVE FOR DESIGN AFTER 23 NOVEMBER 1956.

(2) FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

(2) MATERIAL: GRADE C FORGED CARBON STEEL, SEE PROCUREMENT SPECIFICATION.

(2) FINISH: ZINC COATING, SEE PROCUREMENT SPECIFICATION, EXCEPT IF THE HOT-DIP (GALVANIZING) PROCESS IS USED, THE COATING SHALL BE APPLIED IN ACCORDANCE WITH SPECIFICATION ASTM A-153.

DIMENSIONS IN INCHES.

(2) MAXIMUM WORKING LOAD EQUAL TO 1/5 MINIMUM BREAKING STRENGTH.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments on the date shown and shall be standard for this product. This drawing supersedes all antecedent standard drawings for the same purpose and shall become effective for the procurement of aeronautical supplies, for use in new design, not later than 6 months after the latest date of approval shown.

APPROVED 8 Jun 42 REVISED (1) 6 Jun 51 (2) 20 Nov 56

PROCUREMENT SPECIFICATION (2)	AIR FORCE-NAVY AERONAUTICAL STANDARD	
RR-C-271 TYPE IV, CLASS 1	(2) SHACKLE, ANCHOR, FORGED CARBON STEEL SCREW PIN	AN116

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.