
USER ACTIVITIES
ARMY - MI, ME
NAVY
AIR FORCE

REVIEWER ACTIVITIES
ARMY
NAVY
AIR FORCE
DLA - IS

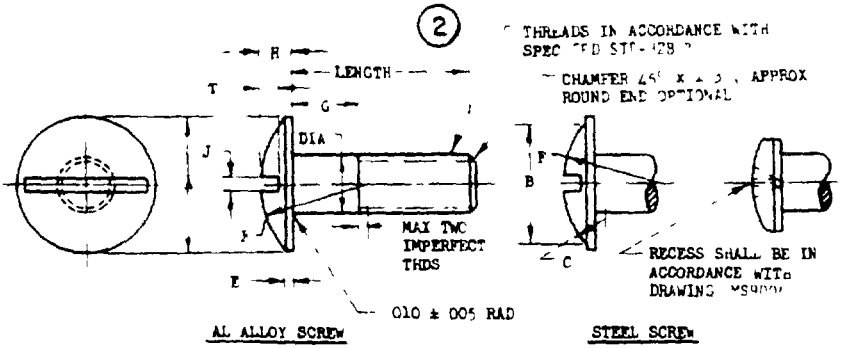

AL ALLOY SCREW — STEEL SCREW

SIZE	DIA +.000 -.002	A DIA	B DIA	C RAD	E +.005 -.000	F RAD	H ±.005	J	T ±.005
164-32UNC-3A	.164	.375	.312	.078	.023	.312	.087	.043 +.007 -.006	.049
164-36UNF-3A									
190-32UNF-3A	.190	.437	.375	.078	.025	.398	.094	.047 +.008 -.006	.054
250-28UNF-3A	.250	.500	.437	.097	.028	.474	.101	.053 +.013 -.002	.058

DASH NOS FOR SLOTTED HEAD STEEL SCREWS

LENGTH ±1/32	G	DASH NUMBERS #8-32	#8-36	#10-32	1/4-28
3/8	1/32	832-6	8-6	10-6	416-6
7/16	1/16	832-7	8-7	10-7	416-7
1/2	1/8	832-8	8-8	10-8	416-8
9/16	5/32	832-9	8-9	10-9	416-9
5/8	7/32	832-10	8-10	10-10	416-10
11/16	9/32	832-11	8-11	10-11	416-11
3/4	11/32	832-12	8-12	10-12	416-12
7/8	15/32	832-14	8-14	10-14	416-14
1	19/32	832-16	8-16	10-16	416-16
1-1/8	23/32	832-18	8-18	10-18	416-18
1-1/4	27/32	832-20	8-20	10-20	416-20
1-3/8	31/32	832-22	8-22	10-22	416-22
1-1/2	1- 3/32	832-24	8-24	10-24	416-24
1-5/8	1- 7/32	832-26	8-26	10-26	416-26
1-3/4	1-11/32	832-28	8-28	10-28	416-28
1-7/8	1-15/32	832-30	8-30	10-30	416-30
2	1-19/32	832-32	8-32	10-32	416-32

(2) 1 MATERIAL STEEL SPEC AMS 6300 OR MIL-S-6050 TENSILE STRENGTH 125 000 PSI (MIN)
(2) AL ALLOY QQ-A-200/5 TENSILE STRENGTH 62 000 PSI (MIN)

2 FINISH STEEL CAD PLATE SPEC QQ-P-416 TYPE II CLASS 1 OR ZINC PLATE PER ASTM B 633-78 Fe/Zn 13 TYPE II

3 PART NUMBERS ADD R BETWEEN FIRST AND SECOND DASH NOS FOR RECESSED HEAD SCREWS
ADD "D" BEFORE FIRST DASH NUMBER FOR AL ALLOY SCREWS SIZE 8 AVAILABLE WITH NO THREAD ONLY

EXAMPLE OF PART NO AN525-10-6= 190-32 SLOTTED HEAD STEEL SCREW 3/8 LONG WITH 1/32 GRIP
AN525D10-6 = 190-32 SLOTTED HEAD AL ALLOY SCREW 3/8 LONG WITH 1/32 GRIP
AN525-10R6 = 190-32 RECESSED HEAD STEEL SCREW 3/8 LONG WITH 1/32 GRIP

4 BEARING SURFACE OF HEAD MUST BE FREE FROM BURRS AND TOOL MARKS

5 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES FRACTIONS ±1/64 DECIMALS ± .010 ANGLES ±1°

6 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED

7 FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

APPROVED 29 OCT 45 REVISED (1) 27 SEP 63 (2) 25 JAN 85

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A AIR FORCE - 82 Other Cust AIR FORCE - 99 NAVY - AS	INTERNATIONAL INTEREST	SCREW - WASHER HEAD	AN525
PROCUREMENT SPECIFICATION MIL-S-7838	SUPERSEDES		SHEET 1 OF 1

DD FORM MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U S GOVERNMENT PRINTING OFFICE 1985 — 505 038/20862

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.

INCH-POUND

AN525 REV. 2
AMENDMENT 1
20 May 1996

AIR FORCE - NAVY AERONAUTICAL STANDARD

SCREW, WASHER HEAD

This amendment forms a part of AN525 REV. 2, dated , 29 January 1985 and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Material: delete: "QQ-A-200/5" and substitute: "ASTM B221, B241, or B308".

Custodians:
Army - AV
Navy - AS
Air Force - 99

Preparing Activity:
DLA-IS

(Project 5305-2132)

AMSC N/A

FSC 5305

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.