
FED. SUP CLASS 5340

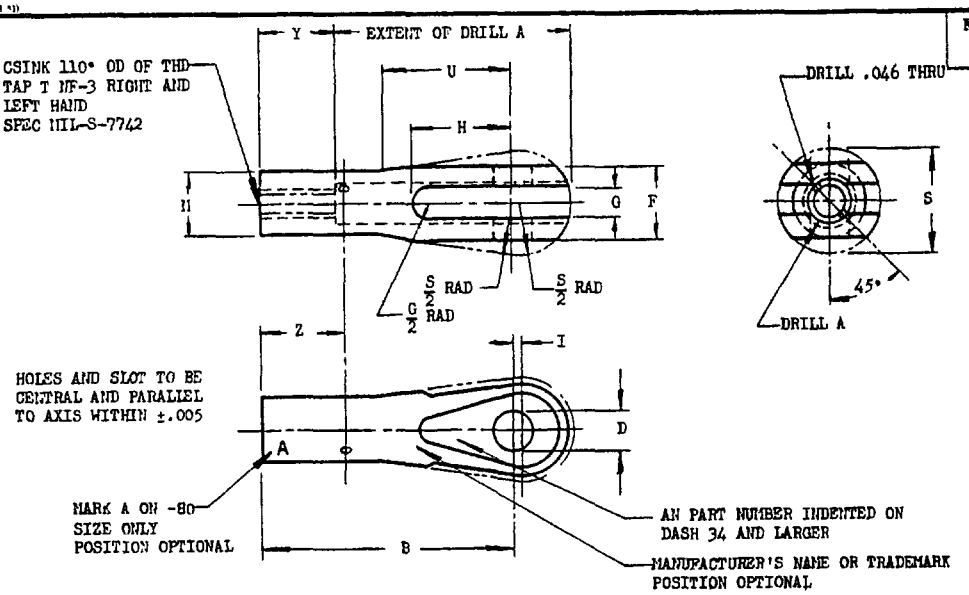

DASH NO.	RATED TIE ROD STGTH. MIN (LB)	TAP T	DRILL A	B ± 015	D DIA +.003 -.000	F +.010 - 005	G +.010 - 000	H	I +.010 - 000	M DIA +.010 -.000	S DIA	U	Y ±.047	Z
10L 10R	1200	6-40	147	1 313	190 +.002 - 000	.250	.109	.375	.031	250	375	.625	.250	.313
21L 21R	2400	10-32	.199	1.531		.313	.150	.469		.281	.500	.719	.313	.375
34L 34R	4200	1/4-28	.261	1.813	.250	.438	.203	.625	.047	.375	.625	.875	.438	.500
46L 46R	(a)4600	5/16-24	.323	1.875	.313	.500		.656		.438	.688	.938	.563	.625
61L 61R	6900			2.000	.375	.563		.844	.063	.453	.750	1.000		
(b) 80L 80R	10000	3/8-24	.386	2.250		.625	.266	.875		.547	.875	1.125	.688	.750
80LA 80RA														
115L 115R	13700	7/16-20	.453	2 500	.438	.719	344	1.000	.078	.625	1.063	1.250	.750	.813
155L 155R	18500	1/2-20	516	2.813	500	.813	406	1 188		.703	1.188	1.438	.875	.938
202L 202R	24000	9/16-18	578	3 125	.563	.922	.453	1 375	.094	.796	1.375	1.625	1.000	1.063
247L 247R	29500	5/8-18	640	3 375	.625	1.032	.516	1.500		.875	1.500	1.750	1.125	1.188
430L 430R	42000	3/4-16	.766	4.125	750	1 250	656	1 938	.109	1.063	1.813	2.250	1.375	1.438
580L 580R	58000	7/8-14	.891	4 875	.875	1 500	781	2.313		1.250	2.125	2.688	1.625	1.688
~~760L 760R~~ (c)	~~76000~~	~~1-14~~	~~1.016~~	~~5.750~~	~~1.000~~	~~1.750~~	~~.906~~	~~2.688~~	~~.125~~	~~1.438~~	~~2.438~~	~~3.125~~	~~1.875~~	~~1.938~~
(c) 780L 780R	76000	1-12	1.016	5.750	1.000	1.750	.906	2.688	.125	1.438	2.438	3.125	1.875	1.938

(a) SPECIAL FOR USE WITH 6900 LB ROD WITH 4600 LB RATING.
(b) -60L AND -80R SIZES INACTIVE FOR DESIGN AFTER 28 NOV 44.
(4) (c) -760L AND -760R SIZES INACTIVE FOR DESIGN AFTER 30 Oct 64 USE 780L OR 780R FOR NEW DESIGN.

(4) FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE MIL-STD-32.
MATERIAL. STEEL.
ADD L AFTER DASH NUMBER FOR LEFT HAND THREAD.
ADD R AFTER DASH NUMBER FOR RIGHT HAND THREAD.
EXAMPLE OF PART NO.: AN665-10L = LEFT HAND THREAD.
AN665-10R = RIGHT HAND THREAD.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.010, ANGLES ±1/2 .
REMOVE ALL BURRS AND SHARP EDGES.

APPROVED 4 Sep 42 REVISED (1) 28 Nov 44 (2) 8 Feb 54 (3) 30 Oct 64 (4) 25 Mar 65

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN665
MIL-T-5683	TERMINAL - THREADED CLEVIS TYPE TIE ROD	

NOTICE When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever and the fact that the Government may have formulated furnished or in any way supplied the said drawings specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto

NOTE This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new design not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

INCH-POUND

AN665 REV 4
NOTICE 2
28 May 1993

MILITARY STANDARD

TERMINAL - THREADED CLEVIS TIE ROD

AN665 Revision 4, dated 25 March 1965, has been reviewed and determined to be valid for use in acquisition

Custodian
Navy - AS
AF - 99

Review Activity:
Army - MI
DLA - IS

Preparing Activity
Navy - AS

AMSC N/A

5340

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.