
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all superseded standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

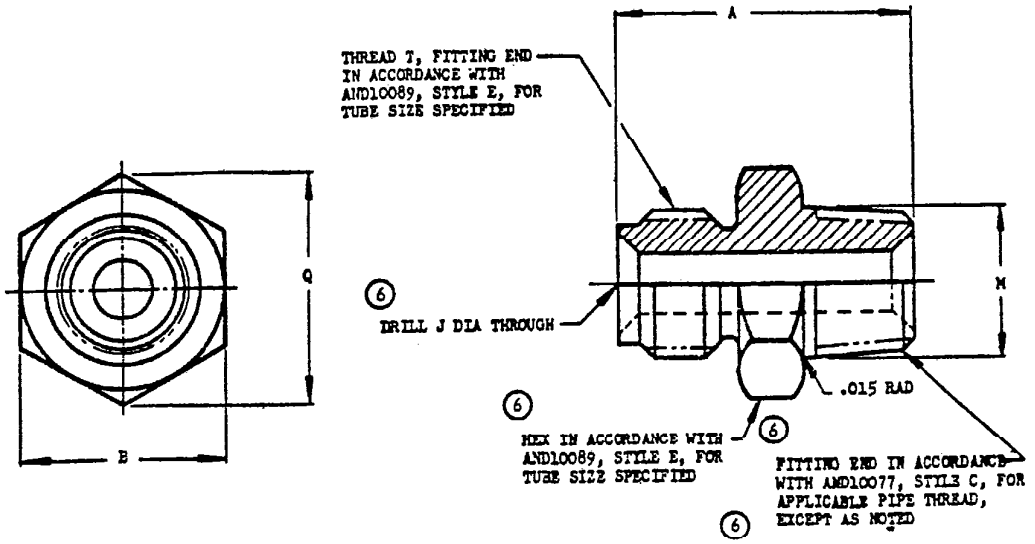

	DASH NO. BRASS	DASH NO. CORROSION-RESISTANT STEEL	TUBING OD	THREAD S ANPT	THREAD T	A	B		J ±.005 DIA	M DIA	Q REF	WEIGHT MAX BRASS	WEIGHT MAX CORROSION-RESISTANT STEEL
	2	C2	.125	1/8	5/16-32 NEF-3A	.812	.438	±.003	.125	.406	.51	.026	
(b)	3	C3	.188		3/8 -24 UNF-3A	.938			.161			.028	
(b)	4	C4	.250		7/16-20 UNF-3A	1.000	.562	±.004	.189		.65	.038	
	5	C5	.312		1/2 -20 UNF-3A	1.062	.625				.72	.045	
(c)	6	C6	.375	1/4	5/8 -18 UNF-3A	1.312	.750		.281	.547	.87	.080	
(c)	8	C8	.500	3/8	3/4 -16 UNF-3A	1.500	.875		.406	.672	1.01	.125	
	10	C10	.625	1/2	15/16-14 NS-3	1.750	.938		.531	.814	1.09	.185	
(a)	12		.750	3/4	1-1/8 -12 UNF-3A	1.875	1.250	±.005	.719	1.047	1.30	.270	
(a)	16		1.000		1-1/2 -12 UNF-3A		1.750				2.02		

(a) INACTIVE FOR DESIGN AFTER 23 NOVEMBER 1942.

(b) INACTIVE FOR DESIGN AFTER 9 MAY 1947, EXCEPT FOR OXYGEN SYSTEM AND ENGINE PRIMER LINES.

(c) DASH NUMBERS 5, 6, 8, AND 10 ARE NOT TO BE USED ON ENGINE PRIMER LINES. INACTIVE FOR DESIGN AFTER 1 JUNE 1954, EXCEPT FOR USE IN OXYGEN SYSTEM AND ENGINE PRIMER LINES.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NUMBER 337.

MATERIAL: BRASS; BARS, SHAPES, OR FORGINGS.
CORROSION-RESISTANT STEEL; BARS, SHAPES, OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

ADD P BEFORE DASH NUMBER FOR CADMIUM-PLATED BRASS NIPPLE.

EXAMPLE OF PART NUMBERS: AN780-4 = NIPPLE-UNION, BRASS, FOR .250 TUBING OD.
AN780P4 = NIPPLE-UNION, BRASS, CADMIUM PLATED, FOR .250 TUBING OD.
AN780C4 = NIPPLE-UNION, CORROSION-RESISTANT STEEL, FOR .250 TUBING OD.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

APPROVED 23 Nov 42 REVISED (1) 9 May 47 (2) 3 Oct 47 (3) 28 Feb 49 (4) 9 Jun 50 (5) 1 Jun 54 (6) 23 Jul 56

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN780
MIL-F-6001	NIPPLE, UNION	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.