
FED. SUP CLASS
4730

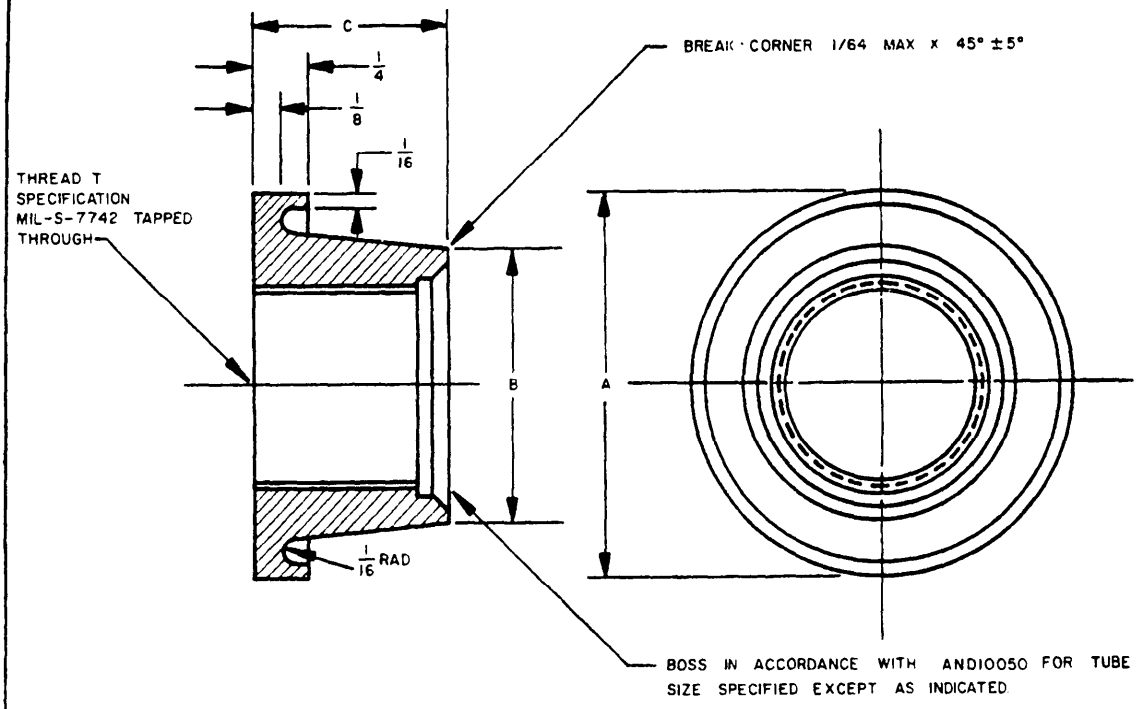

AN PART NO.		TUBING OD	THREAD T REF	A DIA	B MIN DIA	C MIN	WT MAX LB	
STEEL	AL ALLOY						STEEL	AL ALLOY
AN871-4	AN871-4D	1/4	.437-20UNF-3	1.437	.750	.593	.17	.06
AN871-6	AN871-6D	3/8	.562-18UNF-3	1.562	.875	.593	.20	.07
AN871-8	AN871-8D	1/2	.75 -16UNF-3	1.750	1.062	.687	.29	.10
AN871-10	AN871-10D	5/8	.875-14UNF-3	1.875	1.187	.750	.32	.11
AN871-12	AN871-12D	3/4	1.062-12UN-3	2.000	1.437	.906	.37	.13
AN871-16	AN871-16D	1	1.000-12UN-3	2.250	1.687	.937	.45	.15
AN871-20	AN871-20D	1-1/4	1.625-12UN-3	2.625	2.000	.984	.52	.18
AN871-24	AN871-24D	1-1/2	1.875-12UN-3	2.875	2.250	1.125	.64	.22

CONCENTRICITY: DIA B AND THREAD T SHALL BE CONCENTRIC WITHIN 0.20 FULL INDICATOR READING.

⑧ MATERIAL: ALUMINUM, SPECIFICATION QQ-A-6061, CONDITION T OR QQ-A-5052.
STEEL: SPECIFICATION QQ-S-671, F.S. 1020 OR F.S. 1025.

FINISH: STEEL PARTS SHALL BE COATED WITH COMPOUND, CORROSION-PREVENTIVE, SPECIFICATION MIL-C-6708.

MARKING: THE PART NUMBER AND THE MANUFACTURER'S NAME OR TRADE MARK SHALL BE MARKED ON ALL FLANGES IN A MANNER AND LOCATION NOT DETRIMENTAL TO THE FLANGE.

⑦ BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ± 1/64.

APPROVED 2 FEB 42 REVISED ⑤ 23 Jan 50 ⑥ 16 Mar 51 ⑦ 1 Jun 54 ⑧ 26 Sep 86 ⑨ 13 Dec 86

USER ACTIVITIES

REVIEWER ACTIVITIES

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited
This military standard is approved for use within the Department of the Air Force,
and is available for use by all Departments and Agencies of the Department of Defence

P. A	INTERNATIONAL INTEREST	AIR FORCE-NAVY AERONAUTICAL STANDARD	MILITARY STANDARD
USAF - 82 Other Cust ARMY - AV AF - 99		TITLE: FLANGE-STRAIGHT THREAD BOSS WELDING	AN871
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM (MAY 73) 672-1 'COORDINATED' PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.