NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

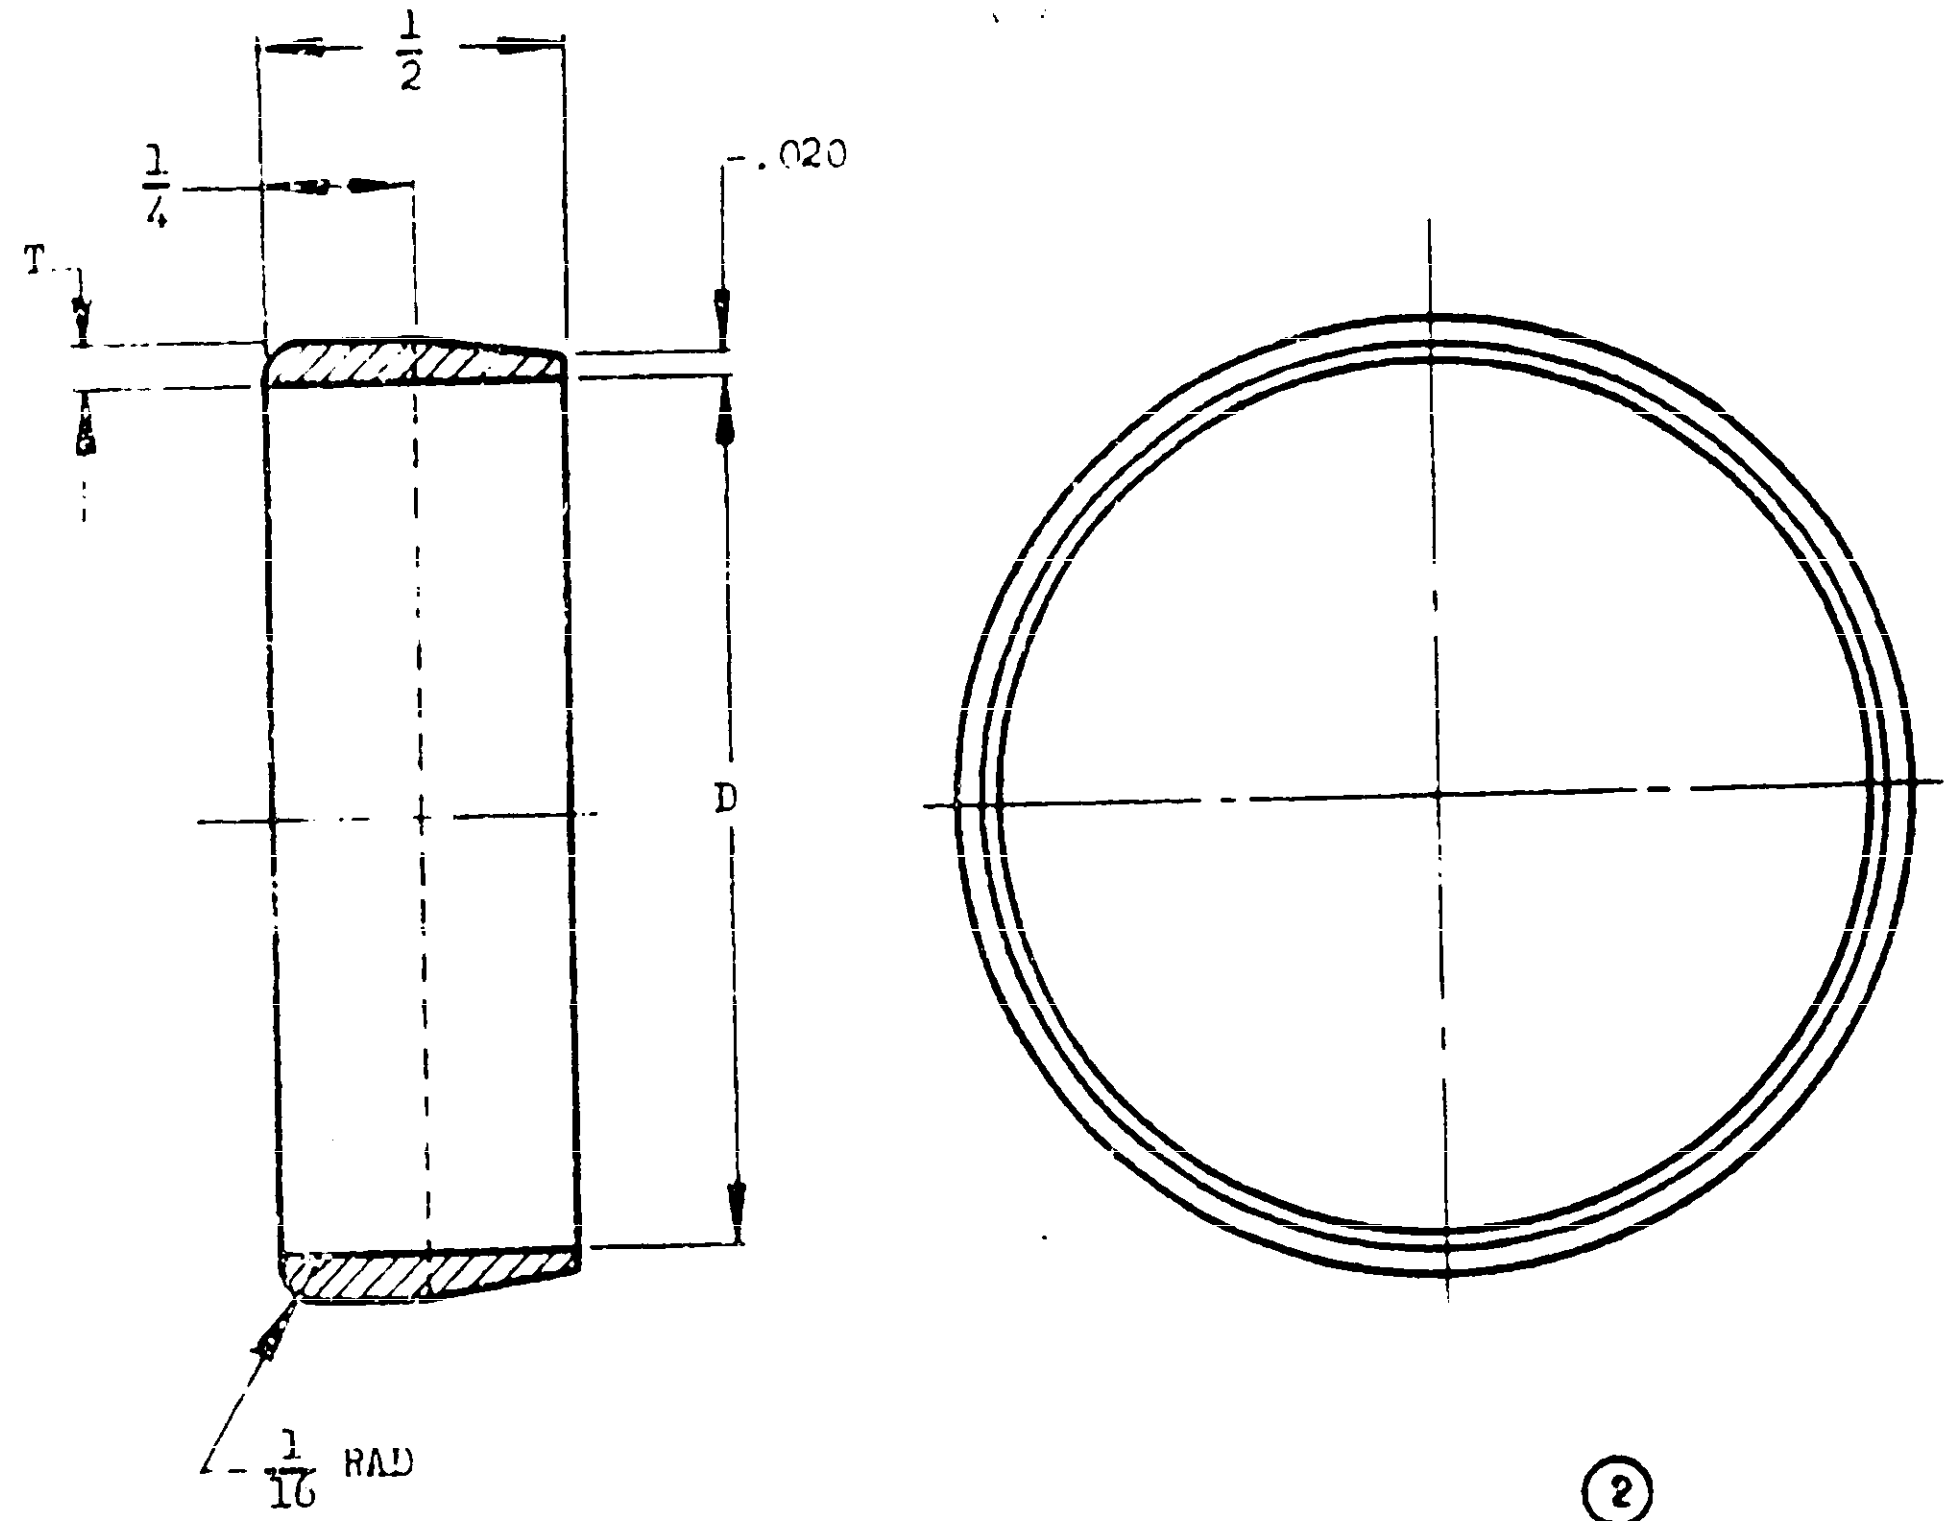

②

DASH NO.		TUBE OD	D +.003 -.000 DIA	T ±.003	WEIGHT MAX	
CORROSION RESISTANT STEEL	BRASS				CORROSION RESISTANT STEEL	BRASS
12	12B	3/4	.755	.038		
16	16B	1	1.005	.062		
20	20B	1-1/4	1.255			
24	24B	1-1/2	1.510	.072		
28	28B	1-3/4	1.760			
32	32B	2	2.010	.082		
40	40B	2-1/2	2.510			
48	48B	3	3.010			

MATERIAL: CORROSION RESISTANT STEEL, SPECIFICATION MIL-T-8606 OR SPECIFICATION MIL-S-7720. BRASS, SPECIFICATION QQ-B-611.

② BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005.

APPROVED 13 Nov 41 REVISED ① 20 Aug 42 ② 1 Jun 54

NOTE.—This drawing when approved by both the Air Force and Navy becomes the Air Force-Navy standard for the product. This issue supersedes all other Government standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approval above.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN876
NONE	COLLAR - TUBING END HOSE CONNECTION	

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:17Z
Check the source to verify that this is the current version before use.