INCH-POUND

MIL-C-27072/25B
10 May 1994
SUPERSEDING
MIL-C-27072/25A
24 September 1987

MILITARY SPECIFICATION

CABLE, SPECIAL PURPOSE, ELECTRICAL, MULTICONDUCTOR
(2 CONDUCTORS) AND SINGLE SHIELDED
M27072/25JDDA*

(B)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and the latest issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-27072.

(B)

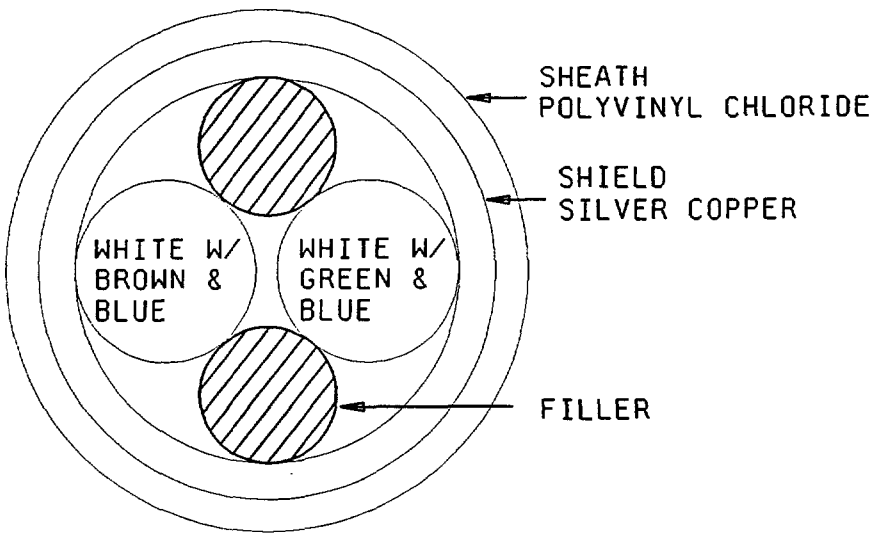


FIGURE 1. Cable configuration.

*The complete PIN requires a color code designator (see table I).

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
DESIGN DATA:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:46Z
Check the source to verify that this is the current version before use.

Design and construction: See figure 1.

Number of conductors: Two.

Conductor size and stranding: See table I.

(B) Wire: In accordance with M16878/4BGE* or M16878/21BGE* (see table I)

Jacket undershield: Not applicable.

Shielding: Tinned copper.

Sheath: Polyvinyl chloride.

Temperature rating: 105°C.

REQUIREMENTS:

Visual and dimensional:

Components:

Basic wire: Silver-coated copper.

Dimension: See table I.

Primary insulation:

Material: Polytetrafluoroethylene.

Wall thickness: .010 ±.002 inch.

Colors:

White with brown and blue tracers.

White with green and blue tracers.

Spark test voltage: 3,400 V rms.

Inspection test voltage: 2,000 V rms.

Impulse dielectric test: 6,500 V peak.

Jacket over insulation: Not applicable.

Color: Not applicable.

Filler:

Material: In accordance with MIL-C-27072.

Lay: 1.0 inch maximum.

Tape material: Not applicable.

Shield:

Material: Tinned copper.

(B) Gauge: 36 AWG.

Braid angle: 20 to 40 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:46Z
Check the source to verify that this is the current version before use.

Workmanship: In accordance with MIL-C-27072.

Sheath:

Material: Polyvinyl chloride.

Wall thickness: .030 inch nominal.

Tensile strength: In accordance with table V of MIL-C-27072.

Elongation: In accordance with table V of MIL-C-27072.

Tension set: Not applicable.

Tear strength: Not applicable.

Accelerated aging: In accordance with table V of MIL-C-27072.

Oil resistance: Not applicable.

Color: See table IV of MIL-C-27072.

Finished cable:

Weight: For future consideration.

Diameter: See table I.

Conductor resistance: In accordance with MIL-W-16878/4 or MIL-W-16878/21.

Dielectric strength: In accordance with MIL-W-16878/4 or MIL-W-16878/21.

Cold bend: Mandrel size in accordance with table XIII of MIL-C-27072.

Ozone: Mandrel size in accordance with table XIV of MIL-C-27072.

Marking durability: In accordance with MIL-C-27072.

Heat Stability: Not applicable.

TABLE I. Construction data.

(B)

Pin M27072/25	Conductor				Finished cable diameter (in.) ±10%	Basic wire MIL-W-16878/4 MIL-W-16878/21
	Wire size (AWG)	Number of strands	Strand size (AWG)	Nominal diameter (inches)		
JDDA*	20	19	32	.058	.197	BGE***

Asterisks (*) shall be replaced by the appropriate color designator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:46Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Air Force - 99
DLA - ES, IS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6145-2067-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:46Z
Check the source to verify that this is the current version before use.