NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/198
2 October 1997

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, DEFENSE INTELLIGENCE AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

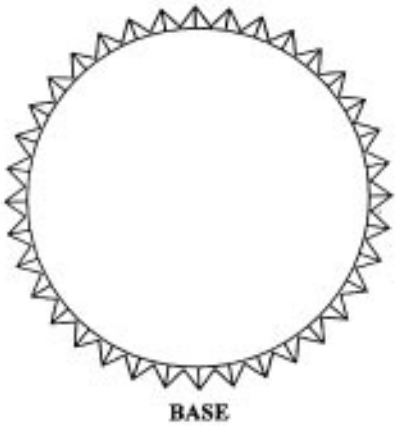

MATERIAL: Red Brass

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:06Z
Check the source to verify that this is the current version before use.

FINISH:
BASE: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DISC: Nickel Plated, Silver Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 13.
DEVICE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
BASE:
DIAMETER (Circumscribed): 2-1/4 inches (5.72 cm) (REF)
THICKNESS (Disk Center): 0.48 inches ±.010 inch (0.122 cm ± 0.025 cm)
THICKNESS (Disk Edge): 0.83 inches ±.010 inch (0.211 cm ± 0.025 cm)
DISK:
DIAMETER: 1-31/32 inches (5.00 cm) (REF)
THICKNESS (Overall): 0.125 inches ±.010 inch (0.318 cm ± 0.025 cm)
DEVICE:
HEIGHT (Overall): 1-1/4 inches (4.45 cm) (REF)
WIDTH (Overall): 3/4 inch (1.91 cm) (REF)
THICKNESS (Cross Point of Bands): 0.141 inch ± .010 inch (0.358 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A full forcer shall be used on the base.

3. The disk shall be lacquered prior to assembly.

4. Piercing on the device shall be as indicated.

5. The device shall have a screw point attached to the reverse side and be made from any type brass. The back screw plate shall be made from any type 1/4 inch (0.64 cm) hard brass. The screw post shall be approximately 3/16 inch (0.48 cm) and shall be hard soldered or fused to the device in a location to correctly position the device to the disc. The base and disk shall have an 1/8 inch (0.32 cm) hole centered through each piece. The three pieces shall be secured by a Type A back plate with the post as shown on TIOH Drawing 4-4-89.

6. The attaching device shall be prong and flat back clutch type. Three prongs shall be located on an approximate 2 inch (5.08 cm) diameter circle. Each prong shall be spaced 120 degrees apart with the bottom prong located on the vertical center line at the bottom of the badge.

Custodian:
Army - IH
DIA - DI

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0913)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:06Z
Check the source to verify that this is the current version before use.