NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/198A
14 October 1998
SUPERSEDING
MIL-DTL-3628/198
2 October 1997

DETAIL SPECIFICATION SHEET


BADGE, IDENTIFICATION, DEFENSE INTELLIGENCE AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

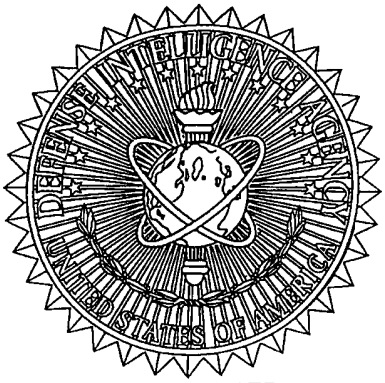


ASSEMBLED



DISK



DEVICE

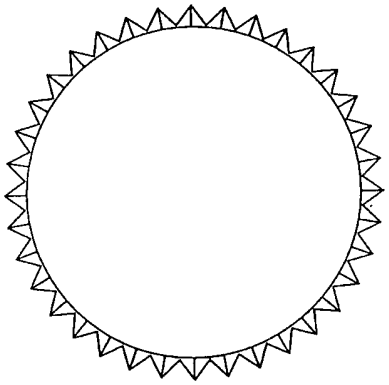

BASE

DASH NO.
-1: Regular Size
-2: Miniature Size

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:06Z
Check the source to verify that this is the current version before use.

MATERIAL: Red Brass

FINISH:

BASE: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DISC: Nickel Plated, Silver Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 13.
DEVICE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:

BASE:
DIAMETER (Circumscribed):
-1: 2-1/4 inches (5.72 cm) (REF)
-2: 1-1/2 inches (3.81 cm) (REF)
THICKNESS (Disk Center):
-1: 0.48 inches $\pm$.010 inch (0.122 cm $\pm$ 0.025 cm)
-2: 0.48 inches $\pm$.010 inch (0.122 cm $\pm$ 0.025 cm)
THICKNESS (Disk Edge):
-1: 0.83 inches $\pm$.010 inch (0.211 cm $\pm$ 0.025 cm)
-2: 0.83 inches $\pm$.010 inch (0.211 cm $\pm$ 0.025 cm)

DISK:
DIAMETER:
-1: 1-31/32 inches (5.00 cm) (REF)
-2: 1-1/4 inches (3.18 cm) (REF)
THICKNESS (Overall):
-1: 0.125 inches $\pm$.010 inch (0.318 cm $\pm$ 0.025 cm)
-2: 0.81 inches $\pm$.010 inch (0.318 cm $\pm$ 0.025 cm)

DEVICE:
HEIGHT (Overall):
-1: 1-1/4 inches (4.45 cm) (REF)
-2: 25/32 inch (1.98 cm) (REF)
WIDTH (Overall):
-1: 3/4 inch (1.91 cm) (REF)
-2: 9/16 inch (1.43 cm) (REF)
THICKNESS (Cross Point of Bands):
-1: 0.141 inch $\pm$ .010 inch (0.358 cm $\pm$ 0.025 cm)
-2: 0.102 inch $\pm$ .010 inch (0.358 cm $\pm$ 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A full forcer shall be used on the base for Dash –1 only.

3. The disk shall be lacquered prior to assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:06Z
Check the source to verify that this is the current version before use.

4. Piercing on the device shall be as indicated.

5. The device for Dash –1 shall have a screw point attached to the reverse side which shall be made from any type brass. The back screw plate shall be made from any type 1/4 inch (0.64 cm) hard brass. The screw post shall be approximately 3/16 inch (0.48 cm) and shall be hard soldered or fused to the device in a location to correctly position the device to the disk and base as indicated. The base and disk shall have an 1/8 inch (0.32 cm) hole centered through each piece. The three pieces shall be secured by a Type A back plate with the post as shown on TIOH Drawing 4-4-89.

6. The device for Dash –2 shall have two rivets attached to the reverse side which shall be made from any type brass. The device shall be riveted on a location to correctly position the device to the disk and base as indicated.

7. The attaching device shall be prong and flat back clutch type. For Dash –1, three prongs shall be located on an approximate 2 inch (5.08 cm) diameter circle. For Dash –2, three prongs shall be located on an approximate 1 1/4 inch diameter circle. Each prong shall be spaced 120 degrees apart with the bottom prong located on the vertical center line at the bottom of the badge.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
DIA - DI

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0958)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:06Z
Check the source to verify that this is the current version before use.