NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/199
11 December 1997

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, U.S. SPACE COMMAND

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

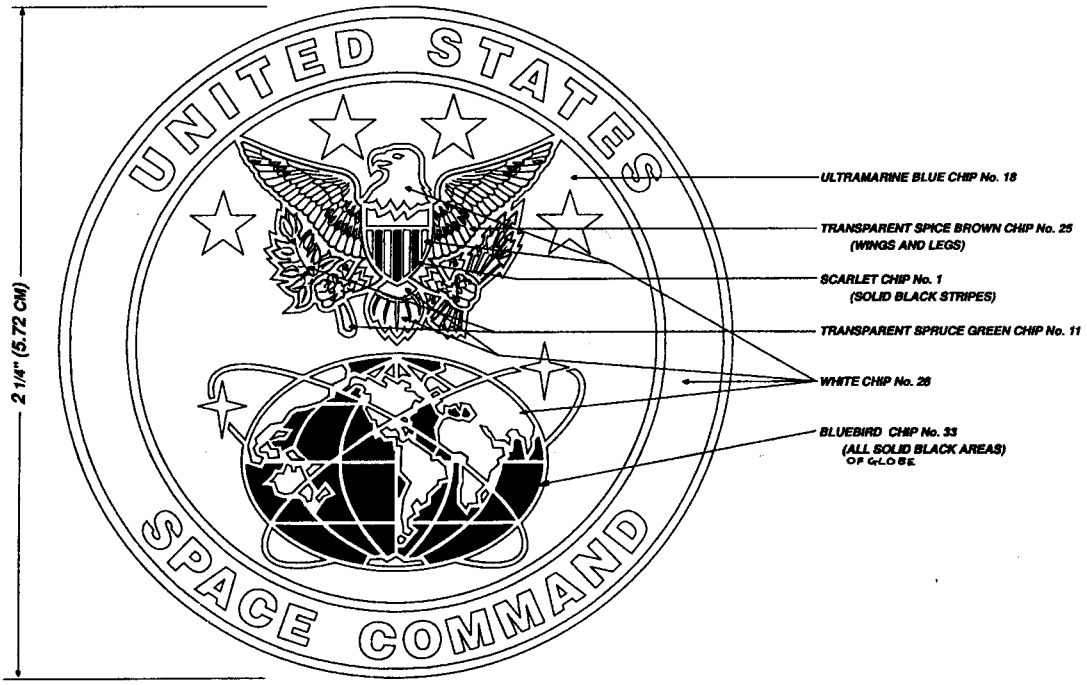

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:06Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DIAMETER: 2-1/4 inches (5.72 cm) (REF)
THICKNESS: 0.104 inches ±.010 inch (0.164 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Scarlet	1
Green	11
Spice Brown	25
Ultramarine Blue	18
White	28
Bluebird	33

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 an incorporate an ultraviolet inhibitor.

4. Attaching device shall be prong with pick and flat ball type clutch. Three prongs shall be located on an approximate 2 inch diameter circle. Each prong shall be spaced 120 degrees apart with the bottom prong located on the vertical center line at the bottom of the badge.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0918)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:06Z
Check the source to verify that this is the current version before use.