NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/201
16 March 1998

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, PROFESSIONAL MILITARY EDUCATION, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

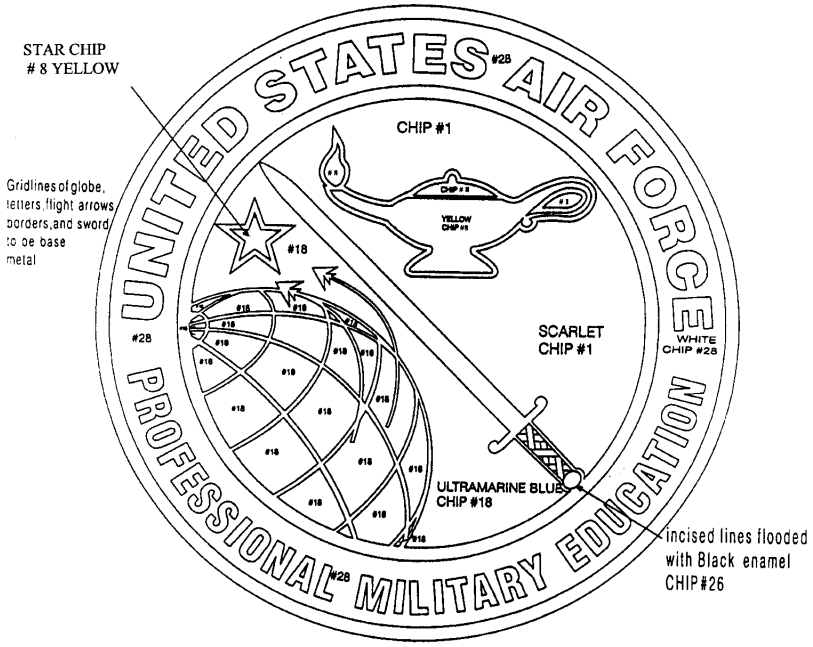

MATERIAL: Gilding Medal

DIMENSIONS:
DIAMETER (Overall): 2 inches (5.08 cm) (REF)
THICKNESS: 0.98 inches ± 0.10 inch (2.49 cm ± 0.025 cm)

FINISH: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:07Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below.

COLOR	CHIP NO.
Scarlet	1
Yellow	8
Ultramarine Blue	18
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 an incorporate an ultraviolet inhibitor.

4. Attaching device shall be prong and clutch type. Three prongs shall be located on an approximate 1-1/2 inch (3.81 cm) diameter circle. Each prong shall be spaced 120 degrees apart with the bottom prong located on the vertical center line at the bottom of the badge.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0933)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:07Z
Check the source to verify that this is the current version before use.