NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/202
16 April 1998

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, MILITARY POSTAL SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

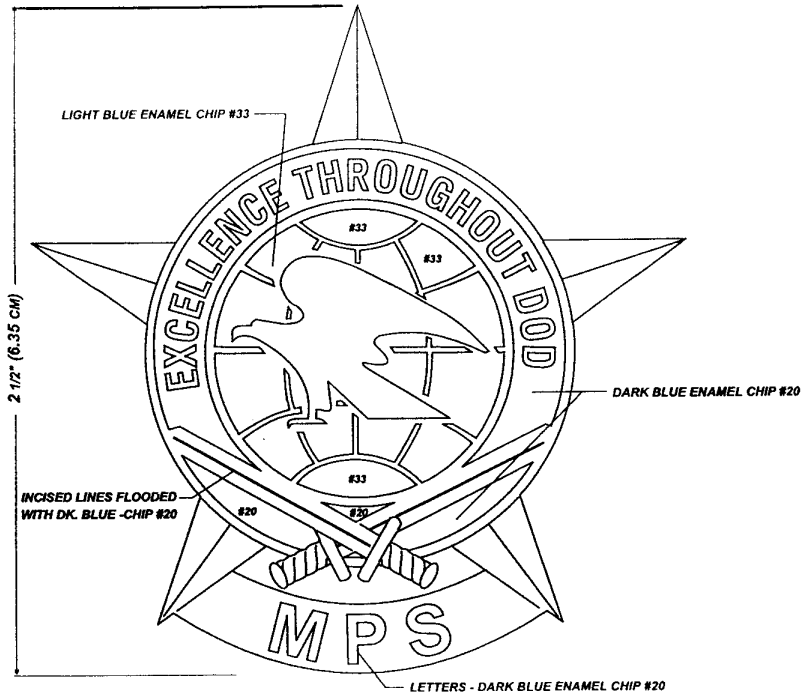

MATERIAL: Gilding Metal

DIMENSIONS:
DIAMETER (Circumscribed): 2-1/2 inch (6.35 cm) (REF)
THICKNESS (Overall including forced depth): 0.140 inches ± 0.10 inch

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:07Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below.

COLOR	CHIP NO.
Dark Blue	20
Bluebird	33

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 an incorporate an ultraviolet inhibitor.

4. Attaching device shall be prong with flat ball type clutch. Three prongs shall be used with a prong each located in the center of the upper right and left star backs and the bottom prong located in the center lower portion beneath the sword handles at the bottom of the badge.

5. A full forcer shall be used.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0937)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:07Z
Check the source to verify that this is the current version before use.