NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/205
26 November 1999

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, NATIONAL IMAGERY AND MAPPING AGENCY

Inactive for new design after 26 November 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

ASSEMBLED

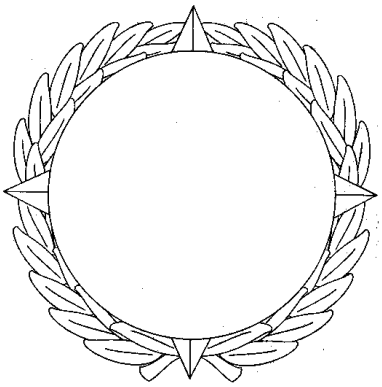

BASE

DEVICE

MATERIAL:

BASE: Red Brass
DEVICE: Gilding Metal

FINISH:

BASE: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
DEVICE: Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:08Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

BASE DIAMETER (circumscribed point to point): 2-5/16 inches (REF)
DEVICE DIAMETER: 1 5/8 inches (REF)
THICKNESS (overall): 0.175 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Full forcer shall be used on the base to reduce total weight of badge.

3. Chip numbers of enameled areas of the device shall be as follows:

White # 28 - outer circle with words "NATIONAL IMAGERY AND MAPPING AGENCY," eagle's head, stars

Black # 26 - arrow feathers, sky around stars, space outside eagle's head and inside scroll, eagle's eye

Green # 12 - leaves (including stems of each of the 4 leaves)

Blue # 33 - globe (including small areas below eagle where arrow staffs cross)

Blue # 20 - scroll

Yellow # 8 - eagle's beak.

4. Attaching device shall be prong with flat ball type clutch. Three prongs shall be located on a circle approximately 1-1/2 inch in diameter. Each prong shall be spaced 120 degrees apart with the bottom prong located on the vertical centerline at the bottom of the badge.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-1000)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:08Z
Check the source to verify that this is the current version before use.