NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/205C(IH)
28 June 2024
SUPERSEDING
MIL-DTL-3628/205B(IH)
29 August 2019

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, NATIONAL IMAGERY AND MAPPING AGENCY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628.

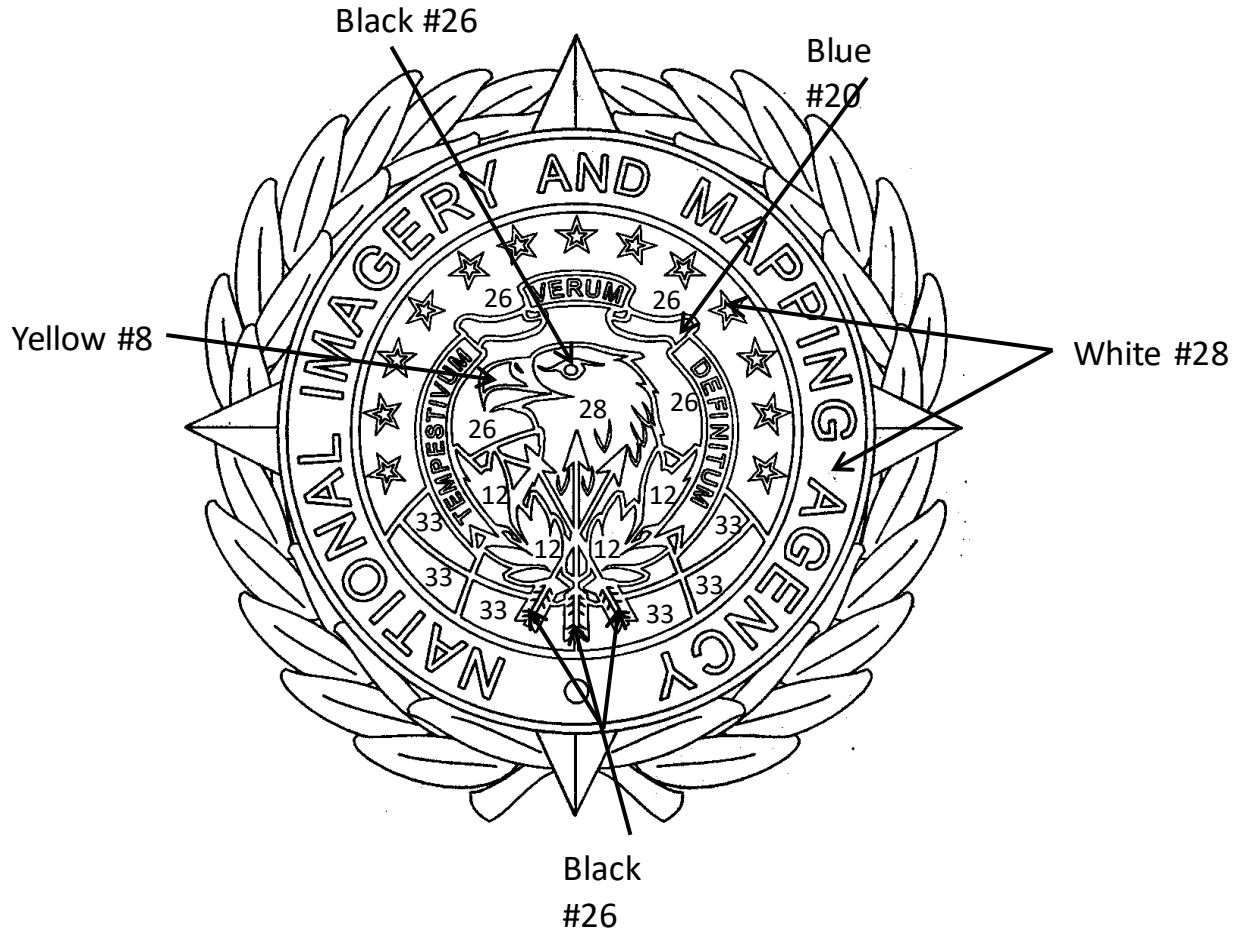

MATERIAL:
BASE: Red Brass 85/15 (UNS Alloy No. C-230)
DEVICE: Gilding Metal 95/5 (UNS Alloy No. C-210)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:08Z
Check the source to verify that this is the current version before use.

FINISH:
BASE: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
DEVICE: Epoxy resin (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DIMENSIONS:
BASE DIAMETER (Circumscribed point to point): 2-5/16 inches (REF)
DEVICE DIAMETER: 1-5/8 inches (REF)
THICKNESS (Overall): 0.175 inch

ATTACHING DEVICE:
1. Attaching device shall be prong with flat ball type clutch.

2. Three prongs shall be located on a circle approximately 1-1/2 inch in diameter. Each prong shall be spaced 120 degrees apart with the bottom prong located on the vertical centerline at the bottom of the badge.

3. The device will be superimposed on the base and secured by two rivets or soft solder. When rivets are used, they will be solid and fabricated from any type brass. The rivets will be located on and soldered to the vertical center line of the device. The device will be riveted to the base as shown.

EPOXY: Epoxy resin shall be applied to the Badge Identification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

COLOR	CHIP NUMBER
White	28
Black	26
Green	12
Blue	33
Blue	20
Yellow	8

AREAS:
Outer circle with words “NATIONAL IMAGERY AND MAPPING AGENCY” eagle’s head, stars: Color White #28
Arrow feathers, sky around stars, space outside eagle’s head and inside scroll eagle’s eye: Color Black #26
Leaves (Including stems of each of the 4 leaves): Color Green #12
Globe (Including small areas below eagle where arrow staffs cross): Color Blue #33
Scroll: Color Blue #20
Eagle’s beak: Color Yellow #8

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:08Z
Check the source to verify that this is the current version before use.

2. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-185)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:08Z
Check the source to verify that this is the current version before use.