MIL-P-82436 (OS)
Amendment 3
4 April 1969
Superseding
Amendment 2
29 October 1968

MILITARY SPECIFICATION

PUMP, FUEL

This amendment forms a part of Military Specification MIL-P-82436(OS) of 10 May 1966 and has been approved by the Naval Ordnance Systems Command, Department of the Navy

Wherever it appears in specification delete "Bureau of Naval Weapons" and substitute "Naval Ordnance Systems Command"; also delete "BUWEPS" and "NAvWEPS" and substitute "NAVORD".

Page 11, paragraph 4.4.3.1 e. Delete and substitute:
"e. Discharge storage tank, Discharge Otto fuel shall be collected in a storage tank. The Otto fuel shall either be disposed of in accordance with NAVORD OP 3368 or tested in the following manner to determine suitability for reuse:

(1) A representative sample of the collected fuel shall be taken from the storage tank within 30 minutes after performing the Operational test specified in 4.4.4.1 and placed in 0° ± 5°C storage for a minimum of 48 hours.

(2) Visually inspect samples at 0° ± 5°C.

(a) If no precipitate is visible in the Otto fuel at the bottom of the container, the Otto fuel shall be considered acceptable for reuse.

(b) If a precipitate of reddish-orange fibers or particles of random size is visible in the Otto fuel at the bottom of the-container, the Otto fuel shall not be reused for any purpose and shall be disposed of in accordance with NAVORD OP 3368."

FSC 1355

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:08Z
Check the source to verify that this is the current version before use.

Page 12, paragraph 4,4.4,1, Delete and substitute:
"4. 4.4.1 Operational test. The preproduction pumps shall be mounted in the 'pump test stand and connected to the auxiliary equipment and instruments in accordance with Figure 2. Twenty cubic centimeters (2/3 oz.) of lubrication oil. see 6.7. shall be used in the pump housing. The pump and all items containing Otto fuel shall be enclosed by a suitable barrier. The controls and instrumentation readout indicators shall be remotely located from components containing Otto fuel. Safety and handling of the Otto fuel shall be in accordance with NAVORD OP 3368. The acceptability of Otto fuel for reuse in testing pumps shall be determined in accordance with 4.4.3.1 e. The pump shall deliver the Otto fuel at the pressures specified in Table VI, within the respective parameters listed, when driven at 3880 ± 10 rpm, with bias pressure controlled within the respective parameters listed, and using the flow-limiting orifice specified in 4.4.3.1 d. During the test, the pump shall remain loaded and the orifice shall not be by-passed. Pump inlet pressure shall be maintained between 4 and 10 psig."

Page 14, paragraph 4.4.4.4, lines 4 and 5: Delete "in accordance with Table X in the sequence shown" and substitute " in accordance with Table X. Test sequence is optional. "

Page 15, Table X. Delete "Test Sequence" column entirely.

Page 20, paragraph 4.5.7: Delete the third sentence and substitute "All exposed O-rings and Upper Seal 2526834 shall be replaced."

Page 27. Replace Figure 1 with new Figure 1, attached.

Project No. 133- NO33

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:08Z
Check the source to verify that this is the current version before use.

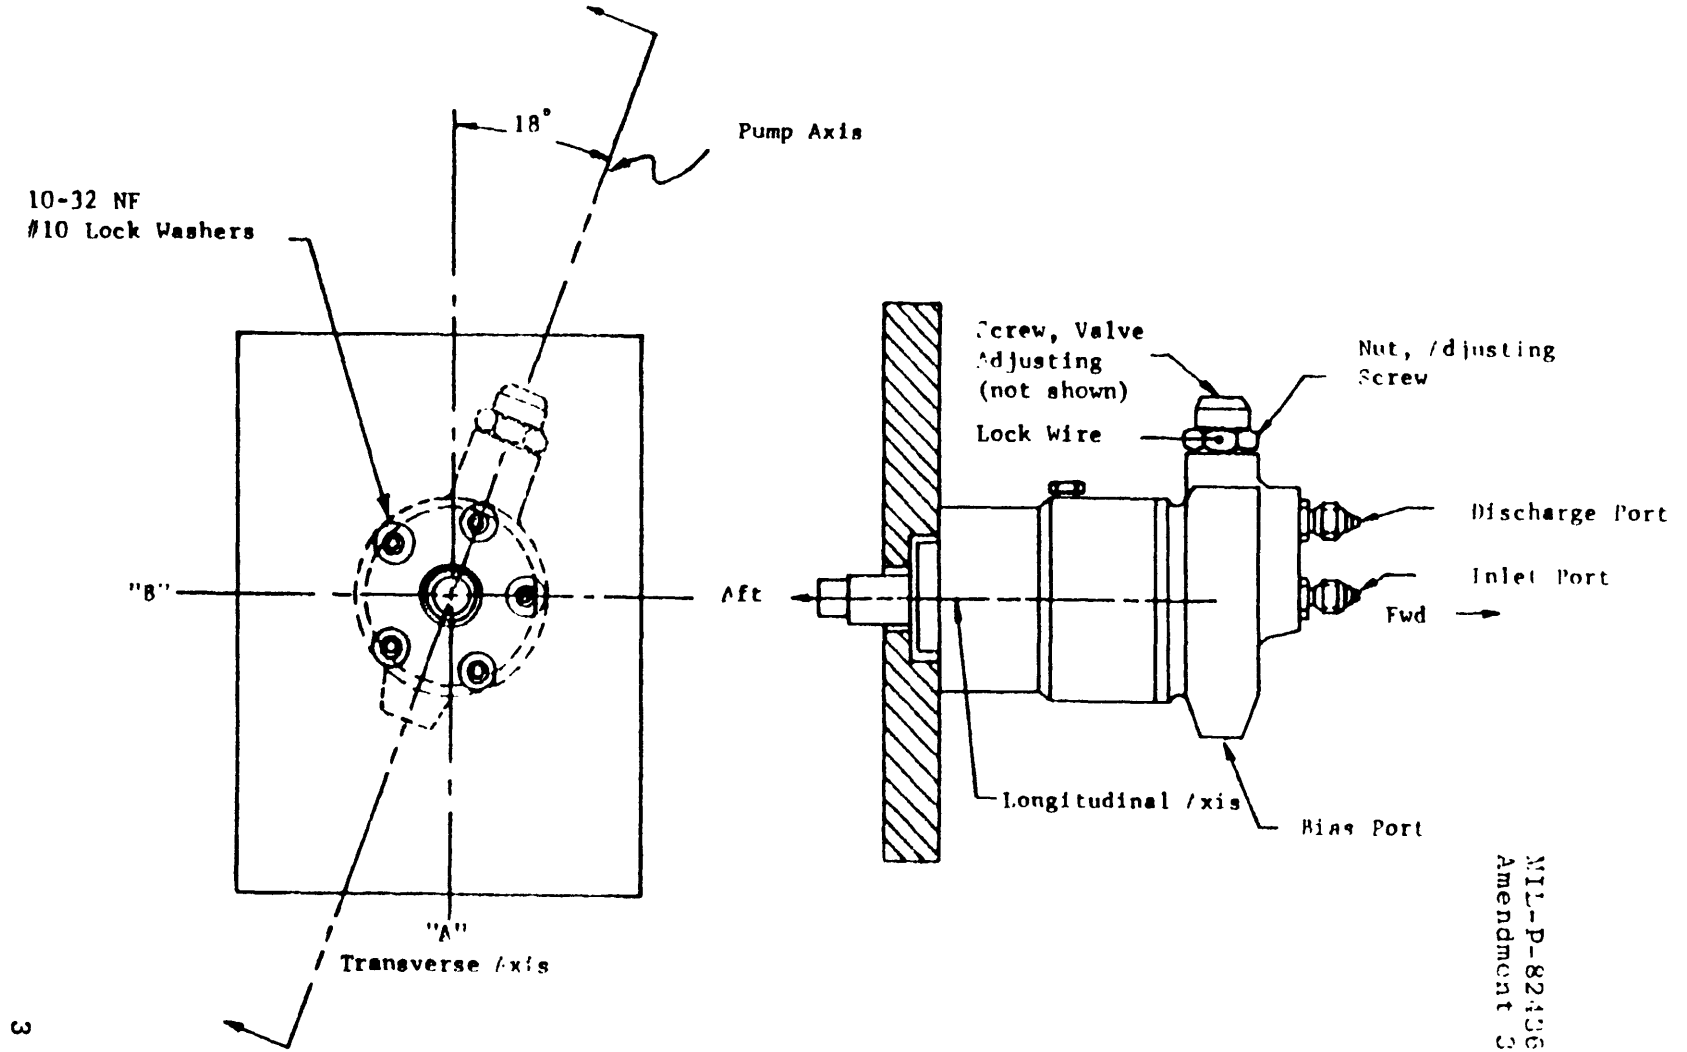

Figure 1. Support Frame

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:08Z
Check the source to verify that this is the current version before use.