INCH-POUND
MIL-DTL-2726/34D
01 November 2006
SUPERSEDING
MIL-R-2726/34C(SH)
3 July 1986

DETAIL SPECIFICATION SHEET

RECEPTACLE, PLUG, ELECTRICAL, 40 - AMPERE, 125 VOLT, SINGLE POLE, FEMALE TYPE (SYMBOL NO. 1214.3 – RED; SYMBOL NO. 1214.4 - BLACK)

Inactive for new design after 28 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-2726.

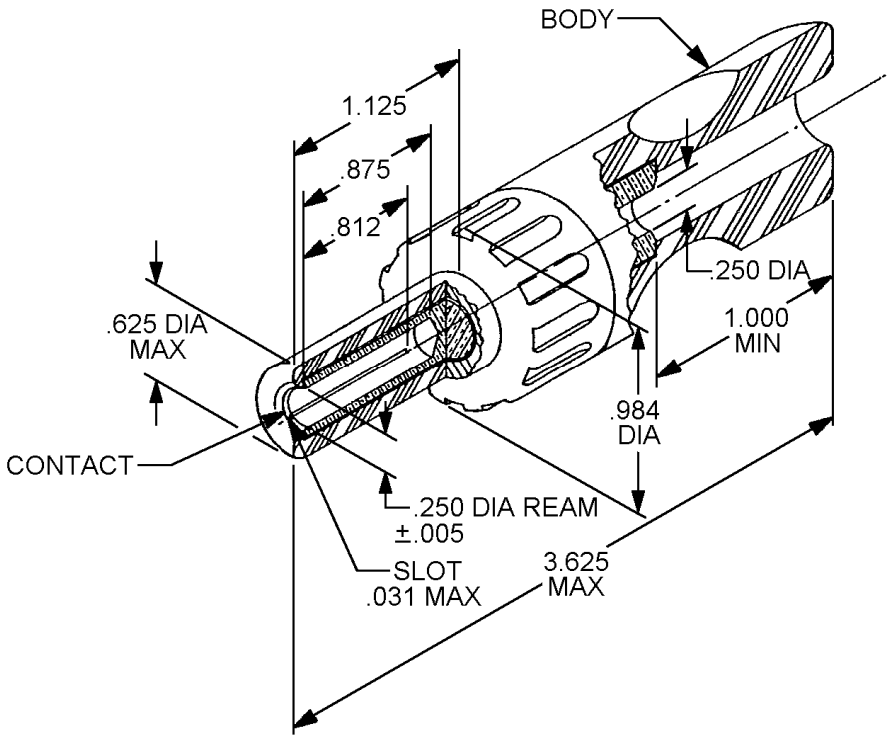

Inches	mm
.005	0.31
.031	0.79
.250	6.35
.625	15.87
.812	20.62
.875	22.23
.984	24.99
1.000	25.40
1.125	28.57
3.625	92.07

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm).
4. Supersedes: Drawing 9000-S6202-73339, symbol 1214.1.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Contact resistance: When tested as specified in accordance with MIL-DTL-2726, the voltage drop shall not exceed 20 millivolts. Measured between the end of a 12.000-inch length of AWG number 6 stranded copper wire, properly connected to the plug, and the connection stud of the test receptacle.

Uncoupling force: Minimum of 8 pounds; maximum of 20 pounds.

High Impact shock: Disengagement of the plug from its test receptacle under High Impact shock shall not be considered as a failure.

Ball drop: Applicable if body material is plastic.

Material: Body-rubber, in accordance with ASTM-D2000, M2AC 710 A130E34 or plastic in accordance with ASTM-D5948 type MAI-60.

Contact hardness: Minimum of Rockwell 76B.

Mating receptacle: MIL-DTL-2726/36, Part or Identifying Number (PIN) M2726/36-001 – red, PIN M2726/36-002 – black.

Electrical rating: 40-ampere, 125-volt, single pole.

PIN: M2726/34-001 – (red) symbol 1214.3,
M2726/34-002 – (black) symbol 1214.4.

Contact finish: Silver plate.

Verification

Verification shall be as specified in MIL-DTL-2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table I, in the order shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:28Z
Check the source to verify that this is the current version before use.

TABLE I. First article and quality conformance inspection.

Inspection	First article	Conformance
Examination	X	X
Insulation resistance	X	X
Dielectric withstanding voltage	X	X
Contact resistance	X	X
Uncoupling force	X	X
Endurance	X	
Mechanical abuse	X	
Ball drop	X	
Uncoupling force	X	
Salt spray	X	
Contact resistance	X	
Current load	X	
Vibration	X	
Shock	X	
Dielectric withstanding voltage	X	
Rockwell hardness	X	

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

ASTM-D2000
ASTM-D5948
MIL-DTL-2726/36

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-4617-024)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:28Z
Check the source to verify that this is the current version before use.