INCH-POUND
MIL-DTL-2726/36C
01 November 2006
SUPERSEDING
MIL-R-2726/36B(SH)
3 July 1986


DETAIL SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, 40 - AMPERE, 125 - VOLT, SINGLE POLE, PANEL MOUNTED, MALE TYPE (SYMBOL NO. 1213.3 – RED; SYMBOL NO. 1213.5 - BLACK)

Inactive for new design after 28 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-2726.

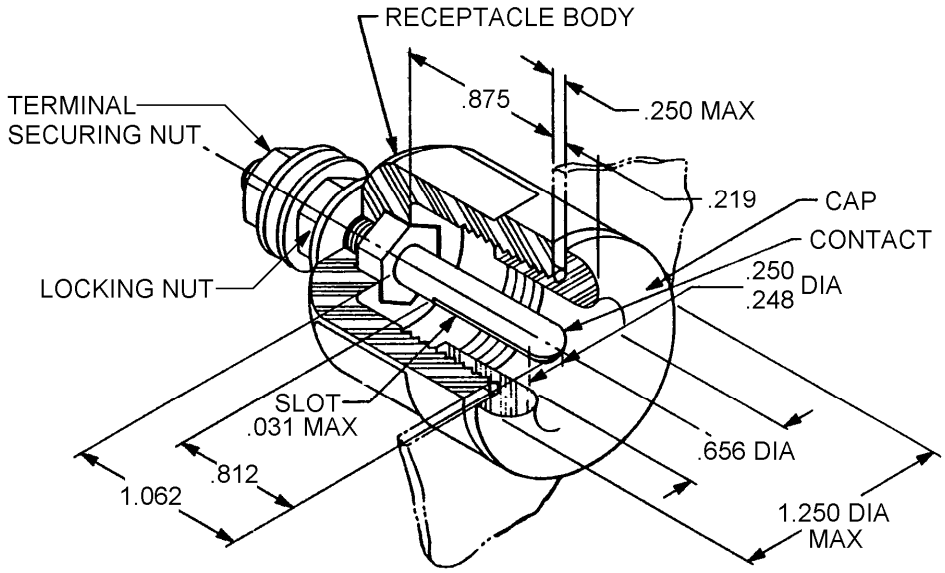

Inches	mm
.031	0.79
.219	5.56
.248	6.30
.250	6.35
.656	16.66
.812	20.62
.875	22.22
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm).
4. Supersedes: Drawing 9000-S6202-73338, symbol 1213.1.

FIGURE 1. Dimensions and configuration.

AMSC N/A FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Contact resistance: When tested as specified in accordance with MIL-DTL-2726, the voltage drop shall not exceed 20 millivolts. Measured between the end of a 12.000-inch length of AWG number 6 stranded copper wire properly connected to the test plug, and the connection stud of the receptacle.

Uncoupling force: Minimum of 8 pounds; maximum of 20 pounds.

High Impact shock: Disengagement of the test plug from the receptacle under High Impact shock shall not be considered as a failure.

Contact hardness: Minimum of Rockwell 76B.

Mating plug: MIL-DTL-2726/34, Part or Identifying Number (PIN) M2726/34-001 – red; PIN M2726/34-002 – black.

Design: Panel hole – .906 inch diameter. Panel thickness .062 to .250 inch.

Material: Body and cap – rubber, in accordance with ASTM-D2000, M2AC 710 A13E034, or plastic in accordance with ASTM-D5948 MAI-60.

Electrical rating: 40-ampere, 125-volt, single pole.

PIN: M2726/36-001 – (red), symbol 1213.3, M2726/36-002 – (black), symbol 12213.5.

Contact finish: Silver plate.

Verification

Verification shall be as specified in MIL-DTL-2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I. First article and quality conformance inspection.

Inspection	First article	Conformance
Examination	X	X
Insulation resistance	X	X
Dielectric withstanding voltage	X	X
Contact resistance	X	X
Uncoupling force	X	X
Endurance	X	
Uncoupling force	X	
Salt spray	X	
Contact resistance	X	
Current load	X	
Vibration	X	
Shock	X	
Dielectric withstanding voltage	X	
Rockwell hardness	X	

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:28Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

ASTM-D2000
ASTM-D5948
MIL-DTL-2726/34

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-4617-026)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:28Z
Check the source to verify that this is the current version before use.