MIL-R-2726/47A(SH)
3 July 1986
SUPERSEDING
MIL-R-2726/47(SHIPS)
30 June 1967

MILITARY SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, ENCLOSED, 15-AMPERE, 125-VOLT, 2-POLE, GROUNDED (SYMBOL NO. 735.3)


(A) This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

(A) The requirements for acquiring the receptacle described herein shall consist of this specification and the latest issue of MIL-R-2726.

(A) denotes changes.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:31Z
Check the source to verify that this is the current version before use.

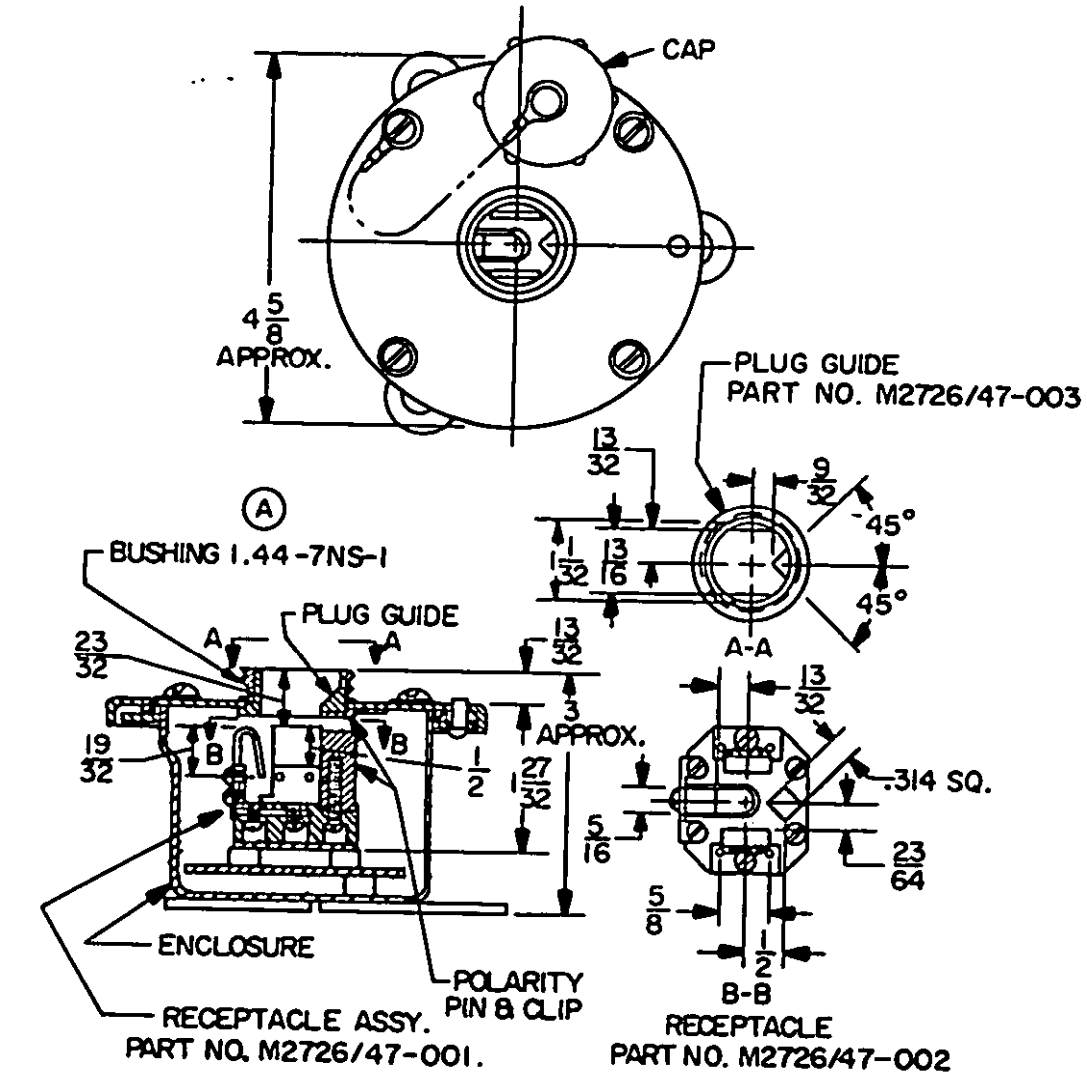

SH 9127

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 202640-16T15:31Z
Check the source to verify that this is the current version before use.

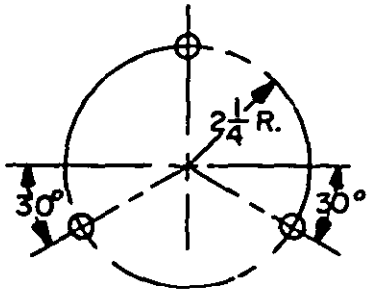

MOUNTING DIMENSIONS

MOUNTING BOLTS TO BE $\frac{3}{8}$ X 16 HEX HD

SH 9127-1

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances are ± 1/64 inch for fractions and ± 0.005 for decimals. Angular tolerance is ± 1/2 degree.
2. Supersedes: Drawing 9000-S6202-74026, symbol 735.1.

FIGURE 1. Dimensions and configuration. - Continued

REQUIREMENTS:

1. Dimensions and configuration: See figure 1.
2. Effectiveness of enclosure: Watertight in accordance with MIL-STD-108.
- (A) 3. Material: Material shall be nonmagnetic. Receptacle base - type MAI-60 in accordance with MIL-M-14 or polycarbonate. Plug guide - GME of MIL-P-15037 or type MAI-60 in accordance with MIL-M-14. Spring contacts - phosphor bronze, spring temper.
- (A) 4. Mating plug: MIL-R-2726/50, part number M2726/50-001 (not furnished).
5. Cap: In accordance with Drawing 9000-S6202-74031-119.
- (A) 6. Enclosure: In accordance with MIL-E-24142/5, part number M24142/5-001.
- (A) 7. Electrical rating: 15-ampere, 125-volt.
- (A) 8. Part number: M2726/47-001 (receptacle assembly)
  M2726/47-002 (receptacle)
  M2726/47-003 (plug guide)

Source: https://assist.dla.mil -- Downloaded: 202610-16T15:31Z
Check the source to verify that this is the current version before use.

(A) QUALITY ASSURANCE:

Quality assurance shall be as specified in MIL-R-2726 and table I herein. The first article and quality conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I. First article and quality conformance inspection.

Inspection	Requirement	Test method	First article	Quality conformance
Examination	3.1, 3.3, 3.4, 3.5, 3.6 and 3.7	4.6.1	X	X
Insulation resistance	3.5.1	4.7.1	X	X
Dielectric withstanding voltage	3.5.2	4.7.2	X	X
Contact resistance	3.5.3.1	4.7.3.1	X	X
Current load	3.5.12	4.7.12	X	
Endurance	3.5.5	4.7.5	X	
Salt spray	3.5.11	4.7.11	X	
Contact resistance	3.5.3.1	4.7.3.1	X	
Vibration	3.5.9	4.7.9	X	
Shock	3.5.10	4.7.10	X	
Effectiveness of enclosure	3.5.4	4.7.4	X	X
Dielectric withstanding voltage	3.5.2	4.7.2	X	
Magnetic permeability	3.5.17	4.7.17	X	X

Preparing activity:
Navy - SH
(Project 5935-N255-48)

Source: https://assist.dla.mil -- Downloaded: 202610-16T15:31Z
Check the source to verify that this is the current version before use.