INCH-POUND

A-A-30071D
January 8, 1993

SUPERSEDING
A-A-30071C
August 3, 1992

COMMERCIAL ITEM DESCRIPTION

CRUTCH (Adjustable, Wood)

The General Services Administration has authorized the use of this commercial item description in lieu of Military Specification MIL-C-37233 and Federal Specification GG-C-716, which is cancelled.

This commercial item description describes an adjustable wooden crutch used as an aid in ambulation.

Salient characteristics: Crutch, Adjustable, Wood, axillary type, shall be provided in Type I (adult), Type II (youth) and Type III (child). The crutches shall be furnished without axillary cushion, handgrips or tip and shall consist of the arm or supporting piece, two bows, hand piece, foot piece, and three stove bolts fitted with washers and winged nuts. The crutches shall be in accordance with DPSC Drawing 1781 for Type I and DPSC Drawing 24368 for Type II and Type III. The complete crutch shall be capable of adjustment in length from 47-1/4 inches to 59-1/2 inches plus or minus 1 inch (120 cm to 151 cm plus or minus 2.54) for Type I, 36 inches to 48 inches (91 cm to 122 cm) for Type II, and 30 inches to 38 inches (76 cm to 97 cm) for Type III. Length adjustment shall be measured from the bottom of the foot piece to the top middle of the arm piece. The sum of the allowed tolerances shall not increase or decrease the overall minimum or maximum length for each type by more than 1/8 inch (.125 cm). The wooden parts shall be thoroughly seasoned solid straight grained or laminated (Type I only) hardwood. For Type II and III laminated parallel wood grain construction may be used for the crutch bows. Wooden parts for all types shall have a protective coat of a good grade, clean transparent spar varnish or lacquer finish which shall be properly applied and present a uniform hard, smooth surface. Crutches shall be free of knots, splits, decay, splinters, sharp edges or corners and sharp particles.

The commercial stove bolts shown on drawing with the same size washers shall be used under a self-locking wing nut or as an alternate a standard wing nut shall be provided with a shakeproof dished-typed washer with toothed periphery (shakeproof #4810-09-01 or equal). Wing nuts shall have large wings protruding vertically above the wing nut body, as shown on drawings, to provide patient ease in crutch length adjustment.

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:36Z
Check the source to verify that this is the current version before use.

The armpiece for Type I shall be 1-1/2 inches (plus or minus 1/4 inch) (4 cm plus or minus .250 cm) in thickness (depth) and 7-3/4 inches (plus or minus 1/8 inch) (20 cm plus or minus .125 cm) in length. The armpiece width dimensions for Type I crutch shall be as shown or drawing 1781 or as an alternate, width shall be 13/16 inches (plus 1/16 minus zero inch) (.812 cm plus or minus .062 cm).

The handpiece shall be cylindrical in shape tapering toward each end. A hole shall be drilled through the center from end to end with proper clearance for the securing stove bolt.

Strength test. The crutch shall be secured in a vertical position and a force of 300 pounds applied in a vertical downward direction at the center of the top surface of the armpiece. Remove this force and apply a vertical downward force of 150 pounds to the center of the handpiece. The crutch shall be secured or clamped for tests at any point or points not more than four inches below the top or above the bottom in such a manner that the bows will be completely unrestrained. The crutch shall withstand the above loads without breakage or any damage.

Workmanship. Crutches shall be free from cracks, knots, splinters, breaks, rough areas, protruding nails, poor or not finished, delamination, parts stuck together, dirt, grease and foreign material.

Unit. Pair (PR). One pair of crutches of the type specified, constitutes one unit.

QUALITY ASSURANCE PROVISIONS

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:36Z
Check the source to verify that this is the current version before use.

Inspection Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means and chemical properties) of the item.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more text characteristics.

Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as specified herein. The unit of product for test purposes shall be one pair of crutches. Sampling shall be S-1 with an AQL of .65.

Visual and dimensional examination. Crutch shall be examined to verify that design, construction, and workmanship are in accordance with applicable requirements.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Contractor certification - The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:36Z
Check the source to verify that this is the current version before use.

Regulatory requirements

Federal Food, Drug, and Cosmetic Act - If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials - The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Preservation, packaging, packing, labeling and marking - Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

NOTE. The following National Stock Number is covered by this document:

NSN	TYPE	NOMENCLATURE
6515-00-777-7325	I	CRUTCH (Adjustable, Wood) (Adult)
6515-00-148-7205	II	CRUTCH (Adjustable, Wood) (Youth)
6515-00-148-7206	III	CRUTCH (Adjustable, Wood) (Child)

Copies of Federal Standard No. 376, Preferred Metric Units for General Use by the Federal Government, may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20420.

The actual DPSC Drawing number 1781 and 24368 may be obtained from Defense Logistics Agency, 2800 S. 20th Street, Philadelphia, PA 19101, ATTN: Drawing Room F326

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:36Z
Check the source to verify that this is the current version before use.

Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this commercial item description
Type

MILITARY INTERESTS:

Military Coordinating Activity:

DoD-MB

CIVIL AGENCY COORDINATING ACTIVITIES:

PHS

PREPARING ACTIVITY:

VA-OSS VANAC (904)
Agent VA-OSS VACO (92A)


AGENT:
DLA-DM

Custodians:

Army-MD
Navy-MS
Air Force-03

PROJECT No. 6515-5314

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:36Z
Check the source to verify that this is the current version before use.

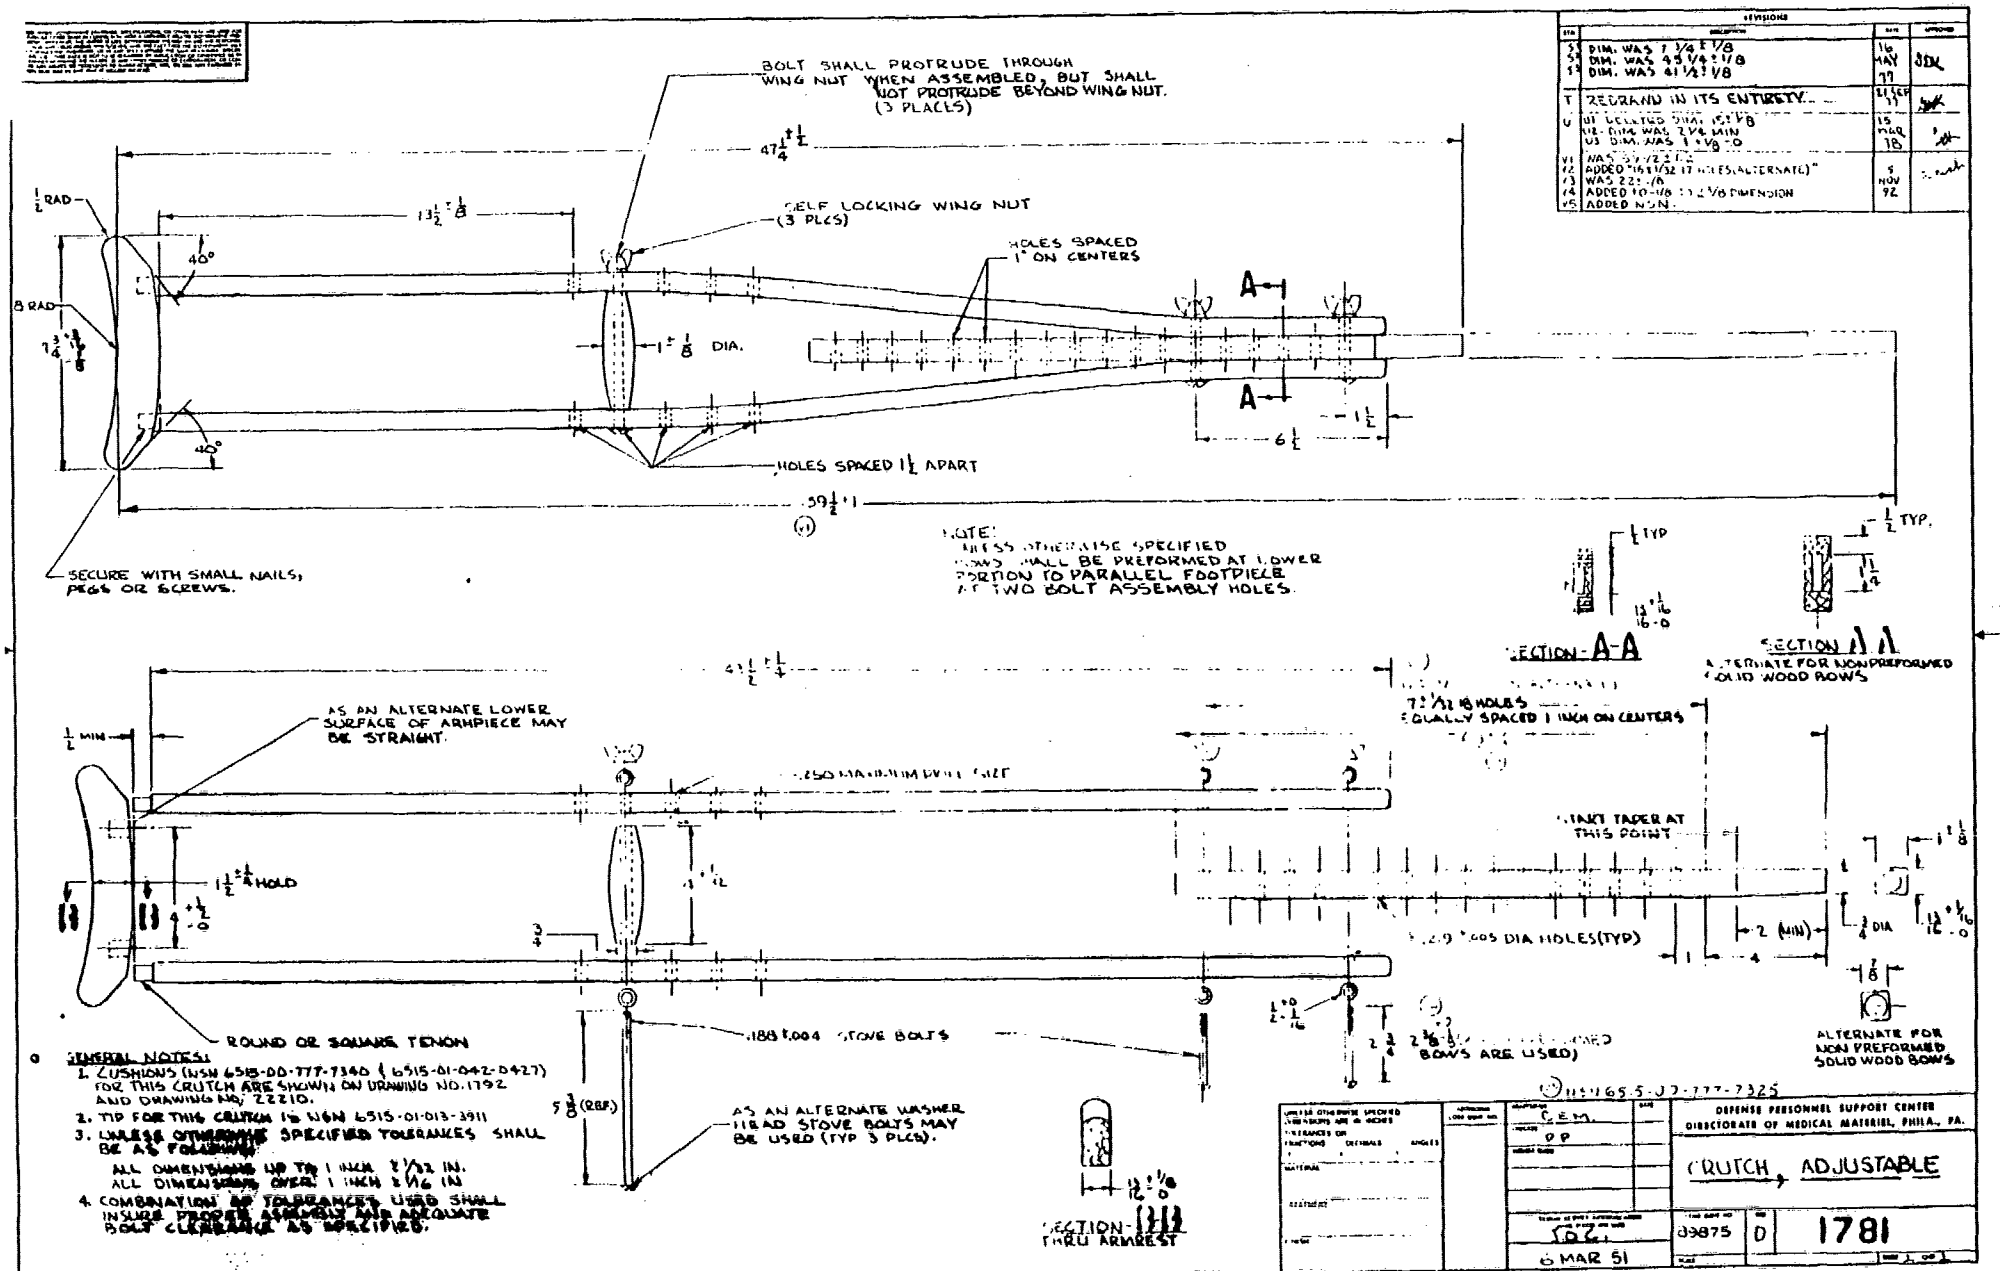

REVISIONS			
S3	DIM. WAS 7 1/4 ± 1/8	16 MAY 77	JDK
S4	DIM. WAS 45 1/4 ± 1/8		
S5	DIM. WAS 41 1/2 ± 1/8		
T	REDRAWN IN ITS ENTIRETY.	21 SEP 77	
U	DIM. LOCATED DIM. 15 ± 1/8	15 MAR 78	
	U2 DIM. WAS 2 1/8 MIN		
	U3 DIM. WAS 1 ± 1/8 -0		
V1	WAS S7 1/2 ± 1/8	5 NOV 92	
V2	ADDED "16 1/32 (7 HOLES ALTERNATE)"		
V3	WAS 22 ± 1/8		
V4	ADDED 10-1/8 ± 1/8 DIMENSION		
V5	ADDED NOTE		

GENERAL NOTES:
1. CUSHIONS (NSN 6515-00-777-7340 & 6515-01-042-0427) FOR THIS CRUTCH ARE SHOWN ON DRAWING NO. 1792 AND DRAWING NO. 22210.
2. TIP FOR THIS CRUTCH IS NSN 6515-01-013-3911
3. UNLESS OTHERWISE SPECIFIED TOLERANCES SHALL BE AS FOLLOWS:
   ALL DIMENSIONS UP TO 1 INCH ± 1/32 IN.
   ALL DIMENSIONS OVER 1 INCH ± 1/16 IN
4. COMBINATION OF TOLERANCES USED SHALL INSURE PROPER ASSEMBLY AND ADEQUATE BOLT CLEARANCE AS SPECIFIED.

NSN 6515-00-777-7325


DEFENSE PERSONNEL SUPPORT CENTER
DIRECTORATE OF MEDICAL MATERIEL, PHILA., PA.

CRUTCH, ADJUSTABLE


DRAWN	C.E.M.
TRACED	P.P.
APPROVED	
DATE	6 MAR 51
CAGE CODE	89875
SIZE	D
DRAWING NO.	1781

ENGINEERING DRAWING LAYOUT B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:36Z
Check the source to verify that this is the current version before use.

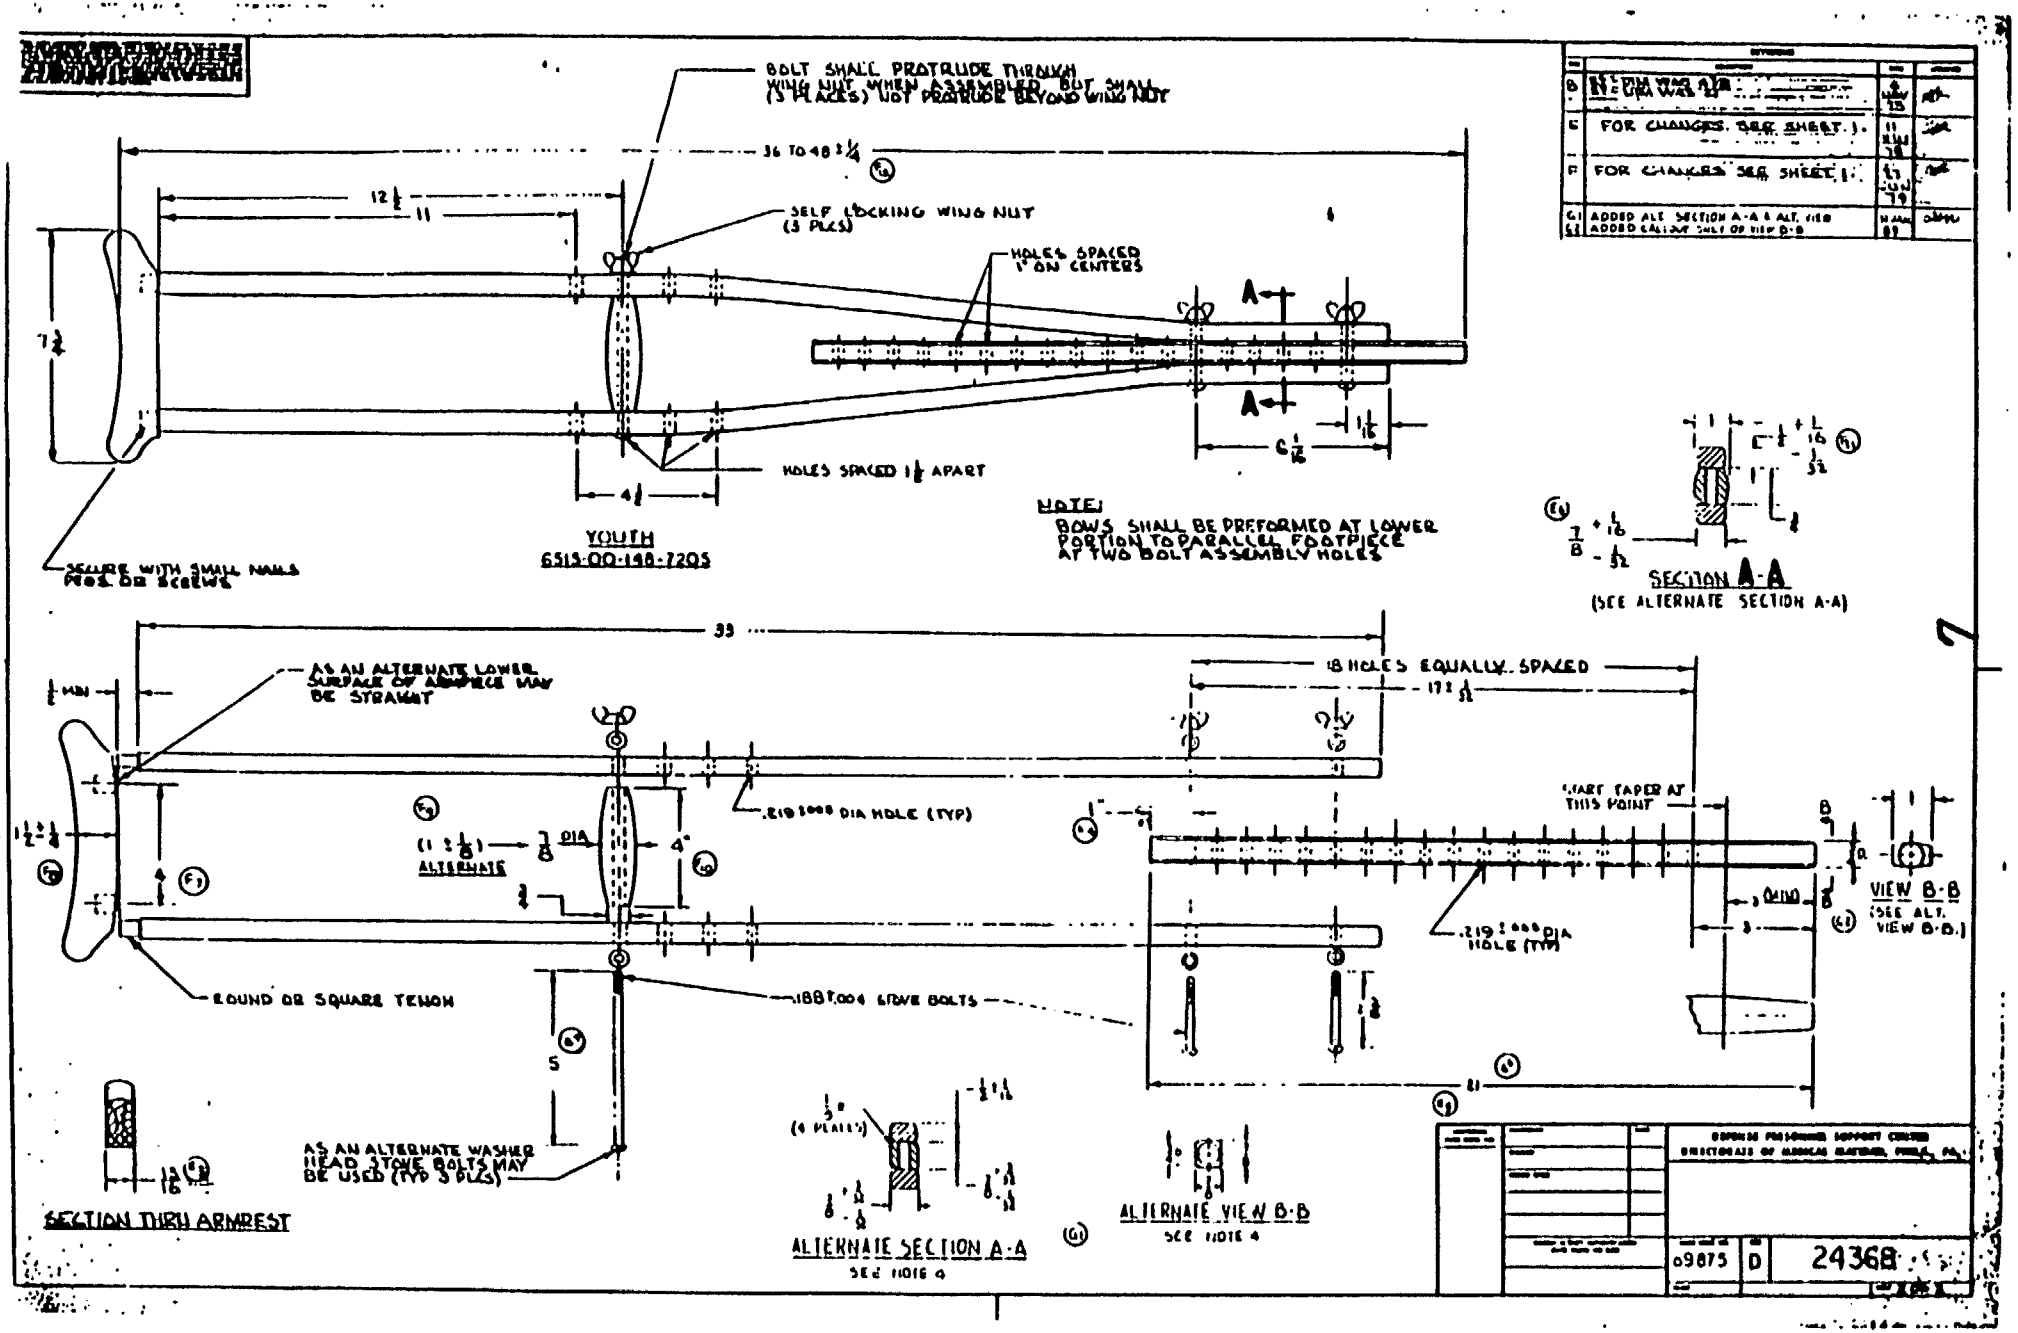

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:36Z
Check the source to verify that this is the current version before use.

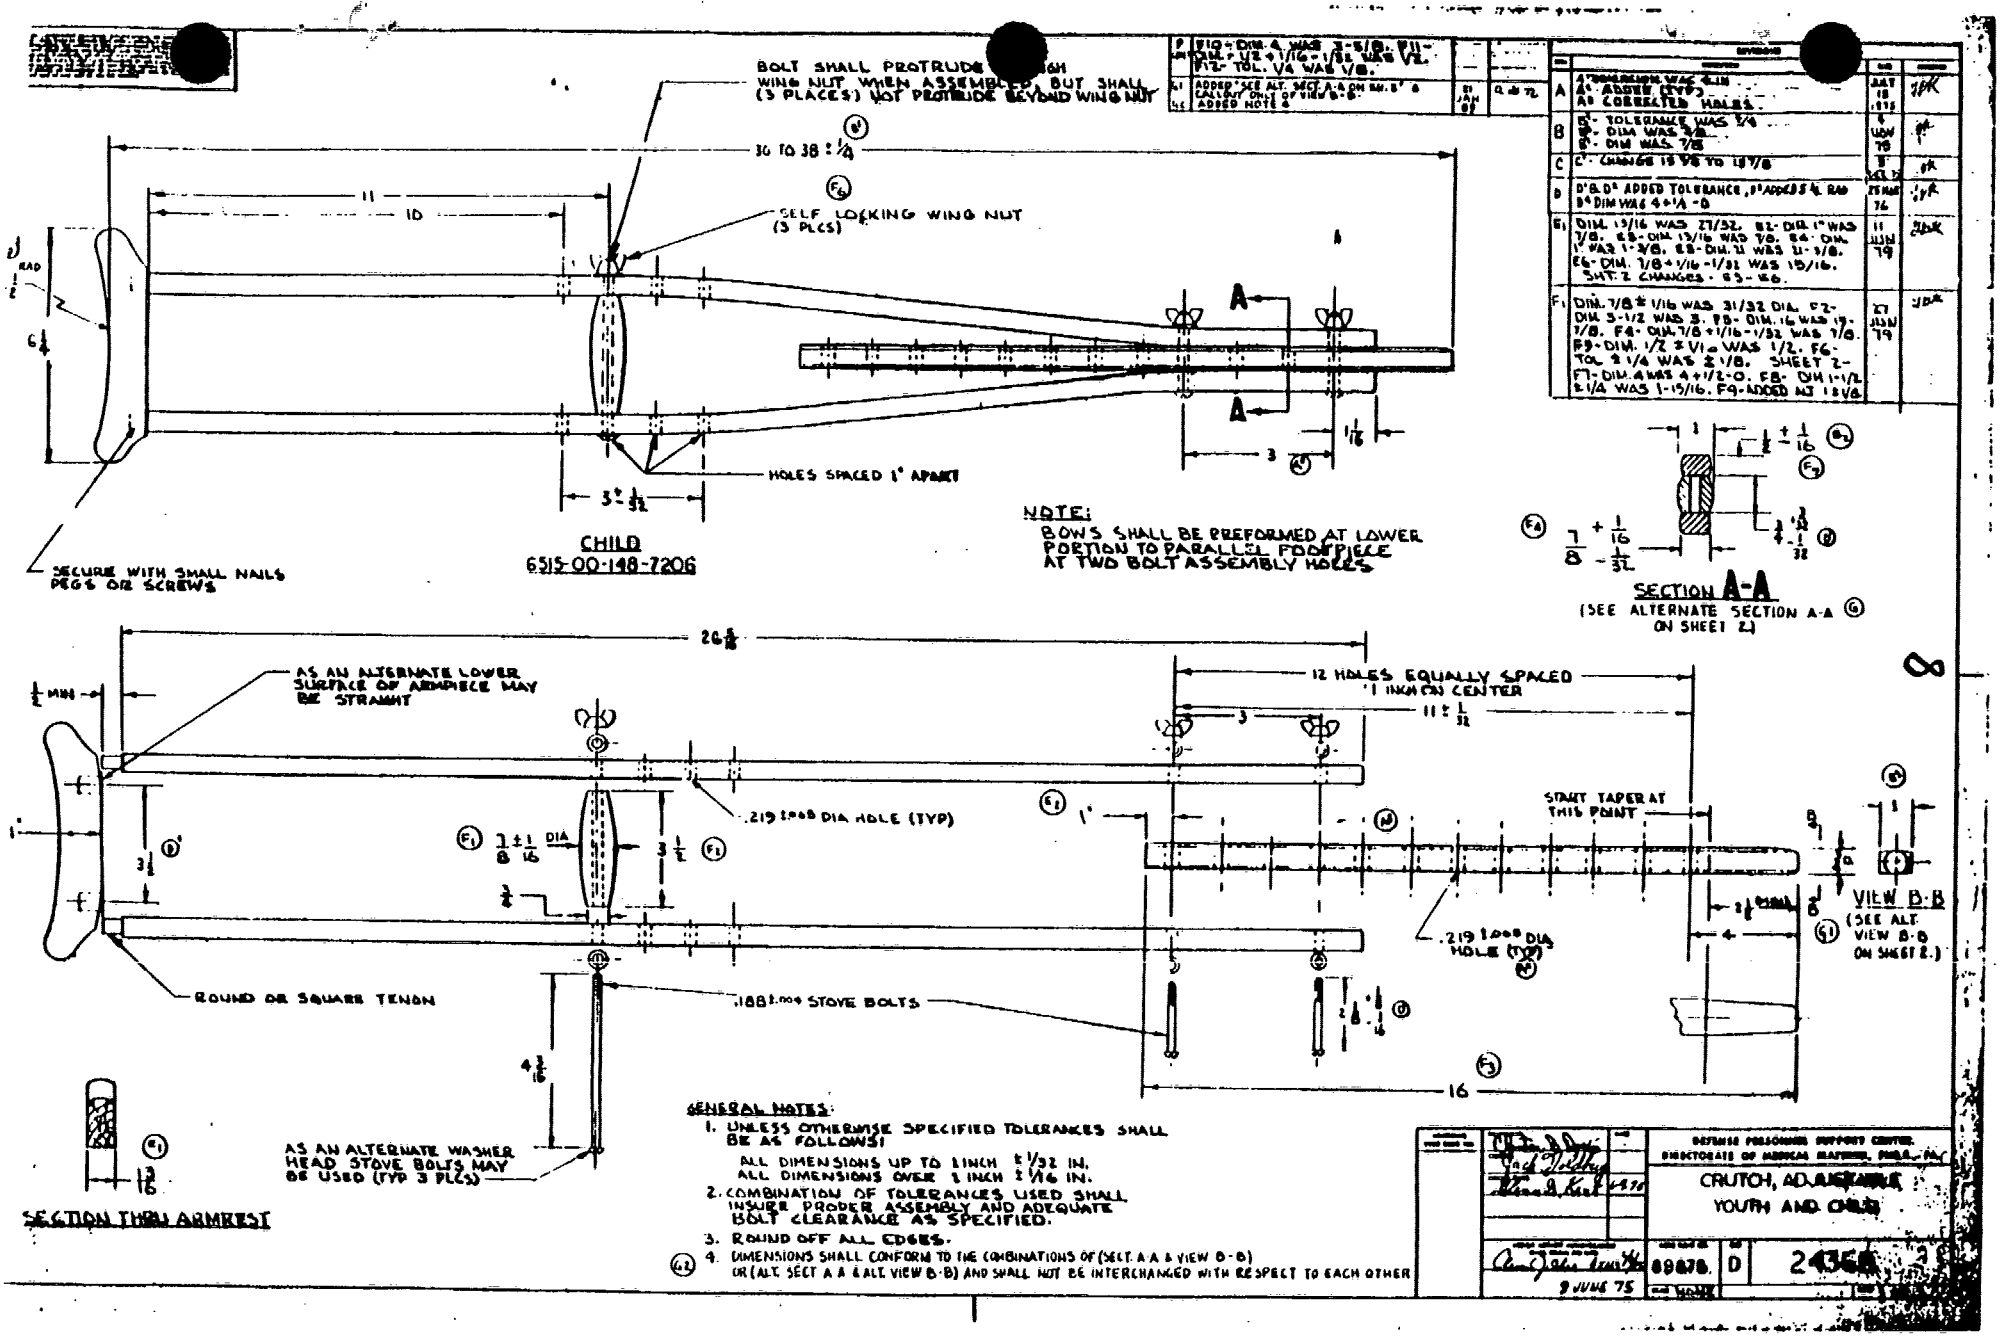

GENERAL NOTES:

1. UNLESS OTHERWISE SPECIFIED TOLERANCES SHALL BE AS FOLLOWS:
   ALL DIMENSIONS UP TO 1 INCH ± 1/32 IN.
   ALL DIMENSIONS OVER 1 INCH ± 1/16 IN.
2. COMBINATION OF TOLERANCES USED SHALL INSURE PROPER ASSEMBLY AND ADEQUATE BOLT CLEARANCE AS SPECIFIED.
3. ROUND OFF ALL EDGES.
4. DIMENSIONS SHALL CONFORM TO THE COMBINATIONS OF (SECT. A A & VIEW B-B) OR (ALT. SECT A A & ALT VIEW B-B) AND SHALL NOT BE INTERCHANGED WITH RESPECT TO EACH OTHER

A	4" DIMENSION WAS 4.1N 4" ADDED (TYP) AS CORRECTED HOLES.	JULY 18 1975	
B	B" TOLERANCE WAS 1/4 B" DIM WAS 7/8 B" DIM WAS 7/8	6 NOV 74	
C	C" CHANGE 18 7/8 TO 18 1/8	8 OCT 74	
D	D" & D" ADDED TOLERANCE, D" ADDED 5 4 RAD D" DIM WAS 4 +1/4 -0	25 MAR 74	
E1	DIM. 13/16 WAS 27/32. B2- DIM 1" WAS 7/8. B3- DIM 13/16 WAS 7/8. B4- DIM. 1" WAS 1-3/8. B8- DIM. 11 WAS 11-1/8. E6- DIM. 1/8 +1/16 -1/32 WAS 15/16. SHT. 2 CHANGES - B3 - B6.	11 JUN 74	
F1	DIM. 7/8 ± 1/16 WAS 31/32 DIA. F2- DIM 3-1/2 WAS 3. F8- DIM. 16 WAS 15-1/8. F4- DIM 7/8 +1/16 -1/32 WAS 7/8. F9- DIM. 1/2 ± 1/16 WAS 1/2. F6- TOL ± 1/4 WAS ± 1/8. SHEET 2- F7- DIM. 4 WAS 4 +1/2 -0. F8- DIM 1-1/2 ± 1/4 WAS 1-15/16. F9- ADDED NJ 18 1/8	27 JUN 74	

		DEFENSE PERSONNEL SUPPORT CENTER DIRECTORATE OF MEDICAL MATERIEL, PHILA., PA.	
		CRUTCH, AD JUSTABLE YOUTH AND CHILD	
	9 JUNE 75	89876	D 24360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:36Z
Check the source to verify that this is the current version before use.