INCH-POUND

A-A-52199
December 5, 1995
(see 7.6)

COMMERCIAL ITEM DESCRIPTION

TRAY, MESS, COMPARTMENTED, PLASTIC

The General Services Administration has authorized the use of this commercial item description in preference to MIL-T-43271, and A-A-2605.

1. SCOPE

1.1 Scope. This commercial item description covers five and six compartmented plastic mess trays that are used in the field, standard service mess halls, Navy shipboard, and in post, camp, and station hospitals.

2. CLASSIFICATION

2.1 Classification. The mess trays shall be in the following types and classes:

Type I - Five compartmented (see figure 1)

Type II - Six compartmented, right handed (see figure 2)

Type III- Six compartmented, left handed (see figure 3)

Class 1 - Polycarbonate (see 3.1)

Class 2 - Melamine-formaldehyde (see 3.1)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: Commander, U.S. Army Natick Research, Development and Engineering Center, ATTN: SSCNC-WEF, Natick, MA 01760-5018 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7350

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

2.2 CID based part identification number (PIN). A document based PIN to identify types and classes is included in section 7. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

3. SALIENT CHARACTERISTICS

3.1 Molding compound. The molding compound used in the manufacture of the trays shall be either polycarbonate virgin resin (Class 1) meeting FDA regulation 21 CFR 177.1580; or melamine-formaldehyde (Class 2) conforming to type 3 of ASTM D 704, except that the electrical property requirements of that method shall not apply. All materials used in the construction of the trays shall conform to NSF International Standard No.51 or the applicable requirement of the Federal Food, Drug, and Cosmetic Act for contact with food. Unless otherwise specified, the contractor shall furnish a certificate of compliance to the contracting officer showing that the molding material complies with NSF or FDA requirements.

3.2 Design. Type I trays shall be made in accordance with figure 1. Type II trays shall be made in accordance with figure 2, and Type III trays shall be made in accordance with figure 3. The trays shall have stacking lugs molded integral with the tray to provide for fast drying and prevent binding.

3.3 Finish. All surfaces of the tray shall have a uniform luster throughout produced by molding and not by the application of a protective coating of lacquer, varnish or other adulterant.

3.4 Marking for identification. Each tray shall be permanently and distinctly marked with the manufacturer's name, trade name or trademark of such known character as to be easily identified with the manufacturer, and the year of manufacture. Markings shall be placed on the outside bottom of the tray in the center of the large compartment.

3.5 Resistance to boiling detergent. The trays shall show no cracks, chalking, warpage, appreciable fading or change of color, or any other defects imparing their serviceability or appearance when sanitized in boiling detergent. Testing shall be as specified in 5.6.3.1

3.6 Rim warpage of trays. The trays when tested for rim warpage as specified in 5.6.3.2, shall exhibit a rim warpage of 0.090 inch or less.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

3.7 Color ("Government unique" requirement-see 7.3). The color of the trays shall conform to FED-STD-595, and be either tan or pastel green, as specified (see 7.1). The pastel green colored trays shall fall within the range of color numbers 24525, 24504, or 24533. The tan colored trays shall fall within the range of color numbers 20450, 21643, 22563, 23531, or 23690.

3.8 Workmanship. The finished trays shall be clean, and free of flash, molding imperfections, blisters, areas of delamination, dimples or contamination. All surfaces shall be smooth, free from rough or sharp edges or corners, and uniform in finish and color. Blemishes or discoloration which do not affect the ability of the trays to be sanitized or affect their overall appearance are permitted.

4. REGULATORY REQUIREMENTS

4.1 Contractor recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and except for any Government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices; and is the same product that has been sold in the commercial marketplace for over one year, or is the same product that has successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Market acceptibility criteria. No item of equipment offered under this CID shall be acceptable unless the manufacturer has sold equipment of the same size (similar capacity) and type in a commercial environment for a minimum period of one year. The sales results shall be statistically supported and sales data shall accompany bid proposals. Equipment installed for test purposes in a manufacturer's plant or test laboratory shall not be considered as complying with this requirement.

5.3 Warranty. Unless otherwise specified in the contract or purchase order, the manufacturer's standard commercial warranty shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5.4 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of ASTM E 380, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

5.5 FDA/NSF International standard compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the mess trays conform to the applicable requirements of FDA or NSF International Standard No.2 or No.36. Acceptable evidence of meeting the requirements of FDA or NSF International Standard No.2 or No.36 shall be a listing in the current edition of the NSF International "Listings-Food Service Equipment and Related Products, Components and Materials" and display of the FDA or NSF Product Certification mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the medical authority of the Government indicating the item complies with the applicable FDA or NSF International requirements. Acceptability of the testing laboratory by the medical authority of the Government will be obtained prior to the award of any contract or procurement document.

5.6 Sampling for examination. The inspection lot shall consist of all trays of the same type and class offered for inspection at one time. A random sample of trays shall be selected from each lot. The sample unit shall be as specified for each examination or test. No more than one tray shall be drawn from any one shipping container.

5.6.1 End item visual examination. The end item sample trays shall be visually examined for the defects listed in table I. The sample unit shall be three (3) trays. Any tray in the end item sample unit containing one or more defects shall be cause for rejection of the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects

Examine	Defect
Construction and Workmanship	Not specified type and class Scuffed, abraded or rough area Crack or fracture, chipped, pinhole, blister, wrinkle, pit, unfilled area, flowmark, scratch, sharp corner or edge, and flash not removed Presence of oil or grease, dirt or foreign material Trays do not stack and nest firmly and evenly
Finish and texture	Not specified color Not uniform luster throughout Presence of any finishing coating Lack of uniformity in finish and texture

5.6.2 Dimensional examination. The end item sample trays shall be examined (measured) for conformance to the dimensions specified in figures 1, 2, or 3, as applicable. The sample unit shall be three (3) trays. Any dimension not within the specified tolerance shall be classified as a defect. Any tray in the end item sample unit containing one or more defects with regard to dimensions shall be cause for rejection of the lot.

5.6.3 End item testing.

5.6.3.1 Resistance to boiling detergent test. The sample unit for this test shall be one (1) tray. The tray shall be completely immersed for 1 hour in a boiling 0.3 solution of dishwashing detergent conforming to A-A-682. Distilled water shall be used to make the solution. The level of detergent solution shall be maintained throughout the test period. At the expiration of the 1 hour period, the tray shall be removed and rinsed in clear hot water and allowed to air dry. After drying, the tray shall be examined for the presence of any of the defects specified in 3.5. Any test failure shall be cause for rejection of the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5.6.3.2 Rim Warpage test. The sample unit for this test shall be three (3) trays. Rim warpage shall be determined by placing the tray upside down on a flat surface and holding it firmly in place by a 10 pound weight with a diameter not exceeding 5 inches positioned at the center of the tray. At this time, measure the distance between the tray rim and the flat surface around the tray's perimeter. The distance, when measured with a feeler gauge, shall be no greater than that specified in 3.6 anywhere around its perimeter. Any test failure shall be cause for rejection of the lot.

6. PACKAGING

6.1 Packaging, packing and marking. Packaging, packing, and marking shall be in accordance with the requirements of ASTM D 3951, unless otherwise specified in the contract or purchase order (see 7.1).

7. NOTES

7.1 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this document.
b. Type and class required (see 2.1)
c. Color required (see 3.7).
d. Packaging requirements (see 6.1)

7.2 Sources for documents.

7.2.1 Sources for non-Government association documents.

ASTM

D 704 - Melamine-Formaldehyde Molding Compounds
D 3951 - Standard Practice for Commercial Packaging
E 380 - Use of the International System of Units (SI)
(The Modernized Metric System)

ASTM documents are available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

NSF International Standards

No. 2 - Food Service Equipment
No. 36 - Dinnerware
No. 51 - Plastic Materials and Components Used in Food Equipment,

These standards are available from:

NSF International
3475 Plymouth Road
Ann Arbor, MI 48105

7.2.2 Source for Government documents. Copies of federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

U.S. DEPARTMENT OF HEALTH, EDUCATION AND WELFARE

21 CFR 177.1580 - Polycarbonate Resins, is available from:

Superintendent of Documents
U.S. Government Printing Office
Washington, DC 20402-9325

7.3 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

7.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

AA 52199 -1 -2 (Example of a PIN: AA52199-12)

-2 Class: 1 - Polycarbonate
2 - Melamine-formaldehyde

-1 Type: 1 - Type I - Five compartmented
2 - Type II - Six compartmented, Right handed
3 - Type III - Six compartmented, Left handed

52199 CID number

AA Designates a Commercial Item Description

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

7.5 Sources of supply. Manufacturers whose products are known to meet the CID requirements are as listed below. However, competition is not limited to these companies:

Cambro Manufacturing Co.
7601 Clay Avenue
P.O. Box 2000
Huntington Beach, CA 92647-2000

Continental/Silite International
12 N.E. 36th Street
Oaklahoma City, OK 73105

Halsey Inc.
40 Poplar Sreet
Scranton, PA 18509

Prolon
305 Industrial Avenue
Port Gibson, MS 39150

The Vollrath Company, Inc.
P.O. Box 611
Sheboygan, WI 53082-0611

7.6 Supersession data. The types of mess trays covered by this commercial item description replace the following:

CID-A-A-52199	Replaces:
Type I	MIL-T-43271C
Type II	A-A-2605, Type I
Type III	A-A-2605, Type II

Custodians

Army - GL
Navy - SA
Air Force - 99

Review Activities

Army - MD, QM
Navy - MC, MS
Air Force - 35, 84

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:


Army - GL

Project 7350-0269


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

1 MATERIAL: 9 MIN WALL THICKNESS


2 BREAK ALL ...ERS AND SHARP EDGES

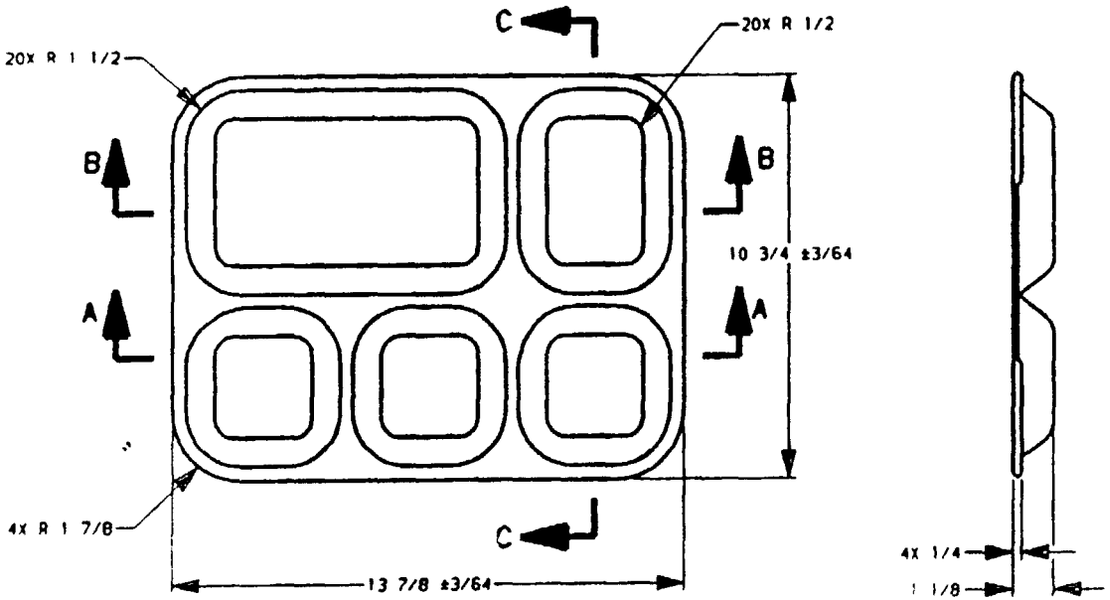


TOP SIDE SHOWN

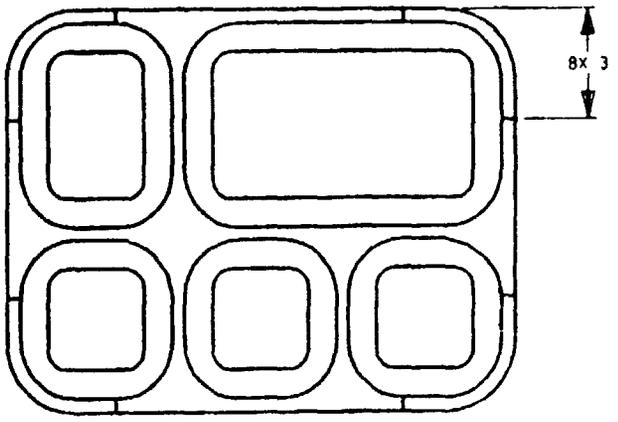


BOTTOM SIDE SHOWN




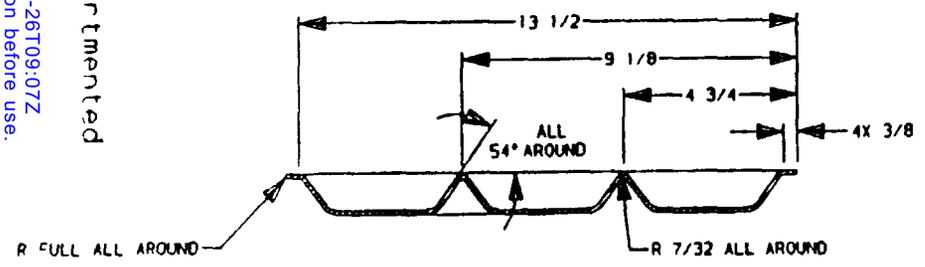


SECTION A-A

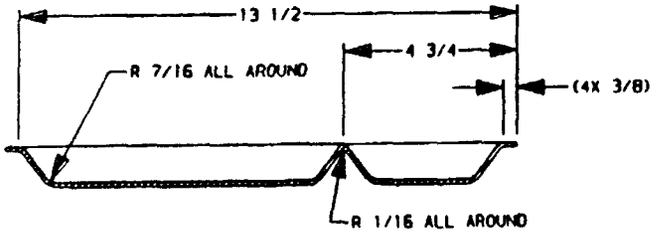


SECTION B-B

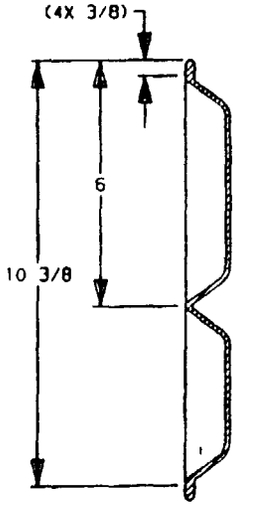

SECTION C-C

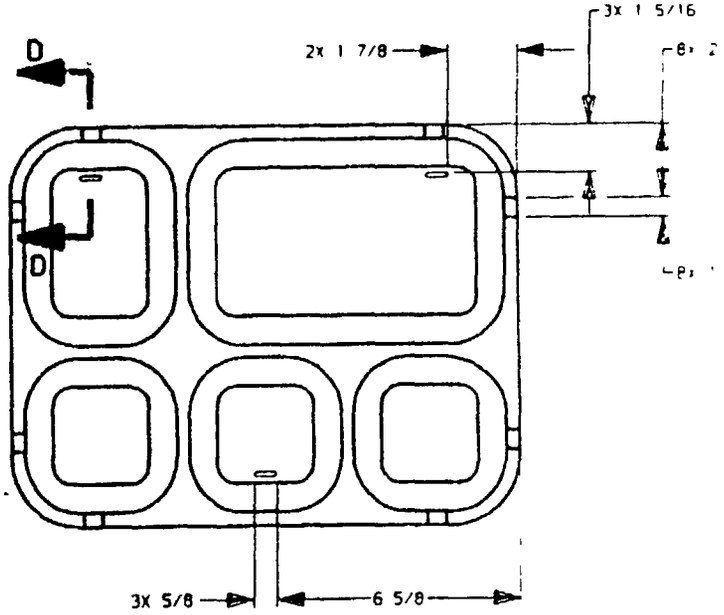

BOTTOM SIDE SHOWN
(ALTERNATE CONSTRUCTION)




SECTION D-D

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES
TOLERANCES:
ANGLES ± 1°
FRACTIONS ±1/32
2 PLACE DIM ± -
3 PLACE DIM ± -

Figure 1 - Type I, Five Compartmented

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

Addition of 19/32" for Handles

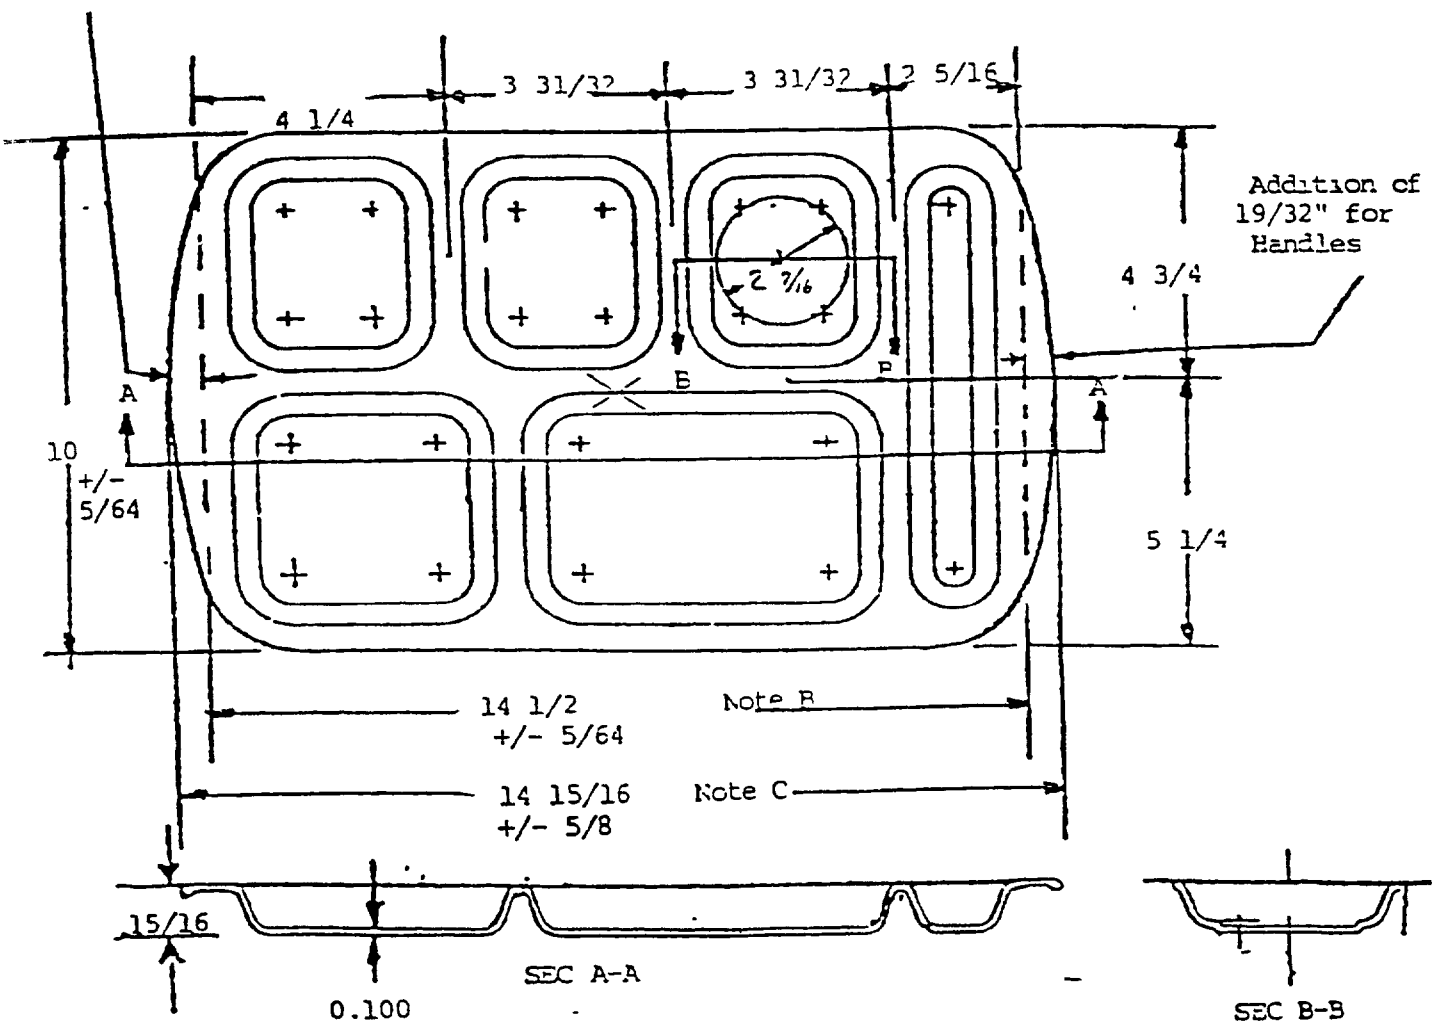


NOTE B: Dimension applies to straight end design

NOTE C: Dimension applies to curved end design. Either design acceptable.

All dimensions in inches. Unless otherwise specified, tolerances are: decimal +/- .020, fractional +/- 1/16

Figure 2 - Type II, Six Compartmented (Right handed)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

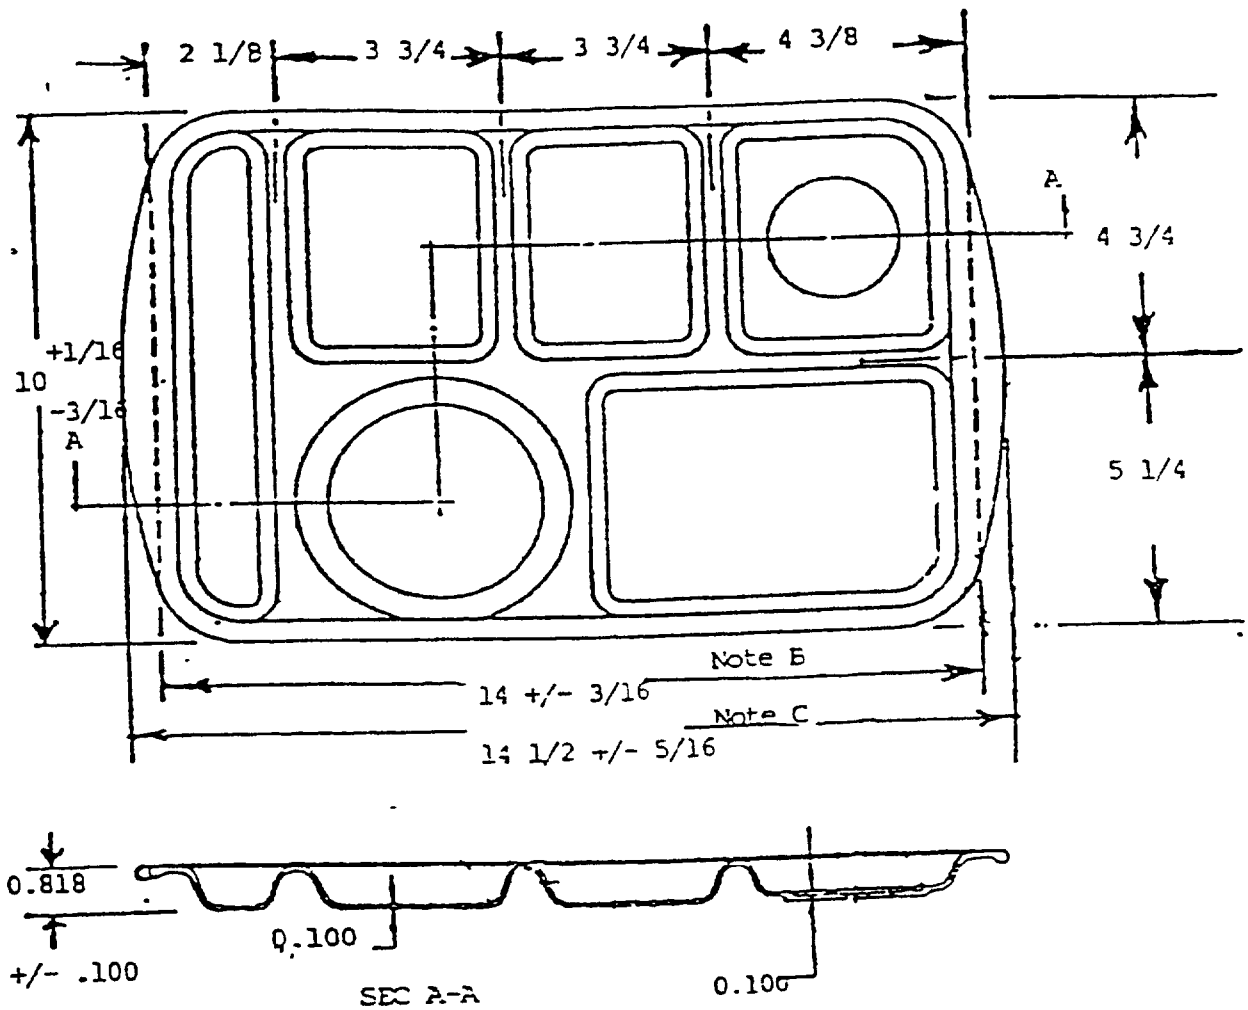

All dimensions in inches.
Unless otherwise specified, tolerances are: decimal +/- .020, fractional +/- 1/16

NOTE B: Dimension applies to straight end design

NOTE C: Dimension applies to curved end design. Either design acceptable.

Figure 3 - Type III, Six Compartmented (Left handed)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-52199	95 December 5

DOCUMENT TITLE: Tray, Mess, Compartmented, Plastic

NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

REASON FOR RECOMMENDATION

4. SUBMITTER			
a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION		
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial ☑ AUTOVON (*If applicable*)	7. DATE SUBMITTED (YYMMDD)	

8. PREPARING ACTIVITY		
a. NAME Army Natick RD&E Center	b. TELEPHONE (*Include Area Code*) (1) Commercial (508) 233-5195	(2) AUTOVON/DSN 256-5175
c. ADDRESS (*Include Zip Code*) Commander, U.S. Army Natick RD&E Center ATTN: SSCNC-WEF Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.