MIL-P-5610D

8 March 1968
SUPERSEDING
MIL-P-5610C
16 March 1965

MILITARY SPECIFICATION

* PARACHUTE ASSEMBLIES AND MAJOR SUB-ASSEMBLIES, PACKAGING AND PACKING OF

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope.- This specification covers the packaging, packing and marking of parachute assemblies and major sub-assemblies for shipment and storage.

* 1.2 Classification.- For packaging and packing purposes, the parachutes shall be of the following types as specified:

Type I - Personnel parachute assemblies.
Type II - Cargo parachute assemblies.
Type III - Parachute assemblies other than type I or II.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

T-T-871	-	Twine, Cotton. Wrapping.
FF-S-111	-	Screw, Wood.
QQ-S-781	-	Steel Strapping, Flat
PPP-B-26	-	Bag, Plastic, Polyethylene.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-636	-	Box, Fiberboard.
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-S-760	-	Strapping, Non-Metallic, (and Connectors).
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.
PPP-T-60	-	Tape; Pressure-Sensitive-Adhesive, Waterproof, for Packaging

FSC 1670

Source: https://assist.dla.mil -- Downloaded: 202640-17T05:22Z
Check the source to verify that this is the current version before use.

PPP-T-76 - Tape, Pressure Sensitive Adhesive Paper, for Carton Sealing.

MILITARY

MIL-P-116 - Preservation, Methods of.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions shall be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 Materials.- The materials shall be as specified herein. Materials not covered by applicable specifications, or not specifically described herein, shall be of the quality acceptable for the purpose intended.

* 3.2 General.- Assemblies and sub-assemblies shall be clean and ready for service rigging.

3.3 Packaging.- Packaging shall be level A or C as specified (see 6.1).

3.3.1 Level A.

* 3.3.1.1 Type I - Personnel parachute assemblies.- One personnel parachute or canopy assembly, with suspension lines chain looped, shall be compactly arranged and placed in a close fitting polyethylene bag. The polyethylene bag shall be a minimum of 0.004 inch thick and shall conform to type I or II, grade A of PPP-B-26. The mouth of the bag, when prepared for closure, shall extend a minimum of 6 inches above the contents, measured from the center of the package. The bag shall be closed by heat sealing or by triple folding at the mouth and taping the mouth full length to the body of the bag with 2 inch minimum width cloth tape conforming tc type I of PPP-T-60, as specified (see 6.1). Prior to or during the bag closing operation, excess air within the bag shall be expelled.

Source: https://assist.dla.mil -- Downloaded: 202640-17T05:22Z
Check the source to verify that this is the current version before use.

3.3.1.2 Type II - Cargo parachute and Cargo extraction parachute assemblies.- One canopy assembly, loosely folded with suspension lines chain looped and positioned on top, shall be placed in a close fitting polyethylene bag. Prior to placing the canopy into the polyethylene bag, component parts attached to the canopy and the suspension lines shall be accordion or lap folded and securely tied with twine conforming to type I or II, 8 ply of T-T-871. The polyethylene bag shall be a minimum of 0.004 inch thick, except that for the type G-11 and G-12 canopies, the film shall be a minimum of 0.006 inch thick. The polyethylene bag shall be close-fitting and conform to type I or II, grade A of PPP-B-26. The mouth of the bag, when prepared for closure, shall extend a minimum of 6 inches above the contents, measured from the center of the package. The bag shall be closed by heat sealing, or by triple folding at the mouth and taping the mouth full length to the body of the bag with 2 inch minimum width cloth tape conforming to type I of PPP-T-60, as specified (see 6.1). Prior to or during the bag closing operation, excess air within the bag shall be expelled.

3.3.1.2.1 Component parts (other than canopy assembly).- All component parts of the individual parachute assemblies, except canopy, shall be provided mechanical and physical protection in accordance with method III of MIL-P-116. The G-11 deployment bag may be placed on the inside bottom of the polyethylene bag containing the type G-11 canopy. The type G-12 pilot chute assembly shall be loosely folded with the suspension lines and deployment line coiled or lap folded, securely tied with twine as specified in 3.3.1.2, and placed in a minimum 0.003 inch thick close fitting polyethylene bag as specified in 3.3.1.2. Bag closure shall be as specified in 3.3.1.2.

3.3.1.2.2 Interior packaging.-

3.3.1.2.2.1 Assemblies weighing up to 45 pounds.- One cargo or extraction parachute assembly, unit packaged as specified in 3.3.1.2 and 3.3.1.2.1, shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The box closure shall be secured with 2 inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45. The parachute assembly components shall be packaged in such a manner that the bagged canopy assembly is placed on top with the suspension lines facing the bottom of the box.

3.3.1.2.2.2 Assemblies weighing 45 pounds or over.- Interior packaging not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:22Z
Check the source to verify that this is the current version before use.

* 3.3.1.3 Type III - Parachute assemblies other than personnel or cargo parachutes.- Type III parachute assemblies shall be packaged as specified in 3.3.1.2 for the type II cargo parachute assemblies.

* 3.3.1.4 Major sub-assemblies (spares) for all parachutes.- All major sub-assemblies for parachutes, except the canopy assembly, shall be packaged in accordance with the requirements of the applicable packaging data sheet or specification (see 6.2).

* 3.3.1.4.1 When applicable, all major sub-assemblies (spares), except the canopy assembly, shall be individually cleaned process C-1, compactly folded or reduced in configuration, and packaged method IC-1 in accordance with MIL-P-116. Each item shall be placed in a minimum 0.003 inch thick close fitting polyethylene bag conforming to type I or II, grade A of PPP-B-26. All bags shall be heat sealed, except those bags containing pilot chutes. The pilot chute bags shall extend a minimum of 6-inches above the contents. Each bag shall be closed by triple folding at the mouth and taping the mouth full length to the body of the bag with 2-inch minimum width cloth tape conforming to type I of PPP-T-60. Prior to or during the bag closing operation (heat sealing or taping), excess air within the bag shall be expelled. Applicable bagged major sub-assemblies (spares), either singly or in multiples, shall be packaged within a fiberboard box conforming to style RSC, type CF, class weather-resistant, grade W5c or W6c of PPP-B-636; a folding paperboard box conforming to variety 2, style III, type B, class Q of PPP-B-566; or a setup box conforming to type I, variety 2, class A, style 4 of PPP-B-676. The box closure shall be specified in the appendix of the applicable box specification.

* 3.3.2 Level C.- Parachute assemblies, component parts and major sub-assemblies shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

3.4 Packing.- Packing shall be level A, B, or C as specified (see 6.1).

3.4.1 Level A.

3.4.1.1 Type I - Personnel parachute assemblies.- Unless otherwise specified (see 6.1), one personnel parachute assembly; two reserve parachute assemblies; or two canopy assemblies, packaged as specified in 3.3, shall be packed in a three-piece, one half telescope, fiberboard

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:22Z
Check the source to verify that this is the current version before use.

shipping container conforming to B-flute material, grade V3c of PPP-B-636, and as shown in figure 1. The top and bottom self-locking sections are identical and shall be die-cut. The sections shall be assembled by folding the sides with the short end flaps inclosed, and then folding the ends to lock in the flaps. The four corners of each section shall be taped as shown in figure 1 with 2 inch minimum width cloth tape conforming to type I of PPP-T-60. The tape shall be approximately 2 inches longer than the depth of each section to allow for easier corner taping and sealing. The tube or liner in figure 1 shall be taped full width over the joint on the outside as shown, with the same tape as specified for the sections. The container shall be prepared for packing by placing the tube or liner into one of the sections. The packaged assemblies shall be placed into the tube and another section shall be placed over the tube and allowed to slide down as far as it will go. Alternatively, the shipping container top and bottom sections shall be constructed similar to the cover of a full telescope box. The flaps shall be positioned and fastened on the inside of the side panels. Each assembled and packed shipping container shall then be evenly taped around the perimeter where the top and bottom sections almost meet, with the tape overlapping itself a minimum of 1 inch. The tape shall be the same as that specified for the container sections. Each shipping container shall be strapped with two flat straps, 3/8 by 0.015 inch, conforming to type I, class B of QQ-S-781; or type II of PPP-S-760. The strapping shall be applied girthwise approximately 4 inches in from each end of the container. When the configuration of a personnel parachute assembly precludes packing in the specified shipping container, dimensional changes will be permitted only upon prior approval from the procuring activity. (see 6.1).

* 3.4.1.1.1 When specified (see 6.1), 12 personnel parachute assemblies; or 24 canopy assemblies, packed as specified in 3.4.1.1, shall be over-packed in a snug-fitting shipping container conforming to overseas type, style A, type 2 load of PPP-B-601. The plywood shall be surface treated with water repellent wood preservation as specified in PPP-B-601. Each shipping container shall be provided with skids as specified in PPP-B-601. Level A "chute pak's" shall be arranged flat three in length, two in width, and two in depth within a shipping container. Inside dimensions of the shipping container shall approximate 48 inches in length, 45 inches in width, and 22-1/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed and reinforced with flat steel strapping in accordance with the appendix of PPP-B-601.

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

* 3.4.1.2 Type II cargo parachute assemblies and type III other parachute assemblies weighing up to 90 pounds inclusive.- Unless otherwise specified (see 5.1), one assembly or multiple of assemblies of one description only, packaged as specified in 3.3.1.2, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. The parachute assembly components not boxed shall be packed in such a manner that the bagged canopy assembly is placed on top with the suspension lines facing the bottom of the container. Each shipping container containing an unboxed parachute assembly or assemblies shall be fitted with a taped liner conforming to type CF, class weather resistant, variety DW, grade V15c of PPP-F-320. Each shipping container shall be closed, waterproofed, and reinforced with strapping or tape banding in accordance with the appendix of the container specification. Weight of contents of each shipping container shall not exceed the weight limitations of the container specification.

* 3.4.1.2.1 When specified (see 6.1), a multiple of assemblies, packed as specified in 3.4.1.2, shall be overpacked in a snug-fitting shipping container conforming to overseas type, style A, type 2 load of PPP-B-601. The plywood shall be surface treated with water repellent wood preservative as specified in PPP-B-601. Each shipping container shall be closed and reinforced with flat steel strapping in accordance with the appendix of PPP-B-601.

* 3.4.1.3 Type II cargo parachute assemblies and type III other parachute assemblies weighing over 90 pounds.- One assembly, packaged as specified in 3.3.1.2, shall be packed in a shipping container conforming to overseas type, style A, type 2 load of PPP-B-601. The plywood shall be surface treated with water repellent wood preservative as specified in PPP-B-601. Shipping containers for the G-11 and G-12 cargo parachutes shall be provided with skids as specified in PPP-B-601. The parachute assembly components shall be packed in such a manner that the bagged canopy assembly, and bagged pilot chute, when applicable, is placed on top with the suspension lines facing the bottom of the container. Each shipping container shall be equipped with a full height fiberboard liner; bottom tray which will fit snugly inside of liner; and top cap. The liner, tray and cap shall be fabricated from fiberboard conforming to type CF or SF, class weather-resistant, minimum grade W5c or W5s of PPP-F-320. The box liner shall have not more than two body joints which shall be either lapped or butted. Lapped body joint(s) shall be effected with a fiberboard lap not less than 1-1/4 inches wide, which shall be fastened full length either inside or outside the adjoining panel with metal fastenings spaced not more than 2-1/2 inches apart center to center. Butted body joint(s)

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

shall be taped their full length. Tape shall be a minimum 3 inches wide and shall conform to either PPP-T-76 or type I of PPP-T-60, color optional. The bottom tray and top cap shall be constructed of one piece of fiberboard, slotted and scored to provide a minimum 4-inch depth. Each flap shall be securely fastened to the adjoining wall with not less than three staples. Alternatively, each shipping container shall be equipped with a full height, half-slotted fiberboard container with snug-fitting cover (cap). The container and cover shall be constructed from the same fiberboard and in the same manner, where applicable, as specified above. The one set of flaps, seams and corners shall be sealed with the tape as specified above. Each shipping container shall be closed and reinforced with flat steel strapping in accordance with the appendix of PPP-B-601, except that screws conforming to style 2s or 2c, size 8 of FF-S-111 shall be used in lieu of nails for assembly of the top panel and that only three straps shall be applied girthwise. The screws shall be 2-1/2 inches in length and shall be spaced not more than 8 inches apart. The inside dimensions provided in table I for the G-11 and G-12 cargo parachutes are approximate and are furnished as a guide only.

TABLE I - Inside dimensions of shipping containers for G-11 and G-12 cargo parachutes.

Cargo Parachutes	Length (inches)	Width (inches)	Depth (inches)
G-11	45	34	18-1/4
G-12	38	27	15-1/2

* 3.4.1.4 Major sub-assemblies (spares) for all parachutes.- All major sub-assemblies for parachutes, except the canopy assembly, shall be packed in accordance with the level A requirements of the applicable packaging data sheet or specification (see 6.2).

* 3.4.1.4.1 When applicable, a multiple of major sub-assemblies (spares), of one description only, except the canopy assembly, packaged as specified in 3.3.1.4.1, shall be packed in a snug-fitting shipping container conforming to style RSC, grade V2s of PPP-B-636; or overseas type, style A, type 2 load of PPP-B-601. Fiberboard containers shall be closed, waterproofed, and reinforced with strapping or tape banding in accordance with the appendix of PPP-B-636. Wood containers shall be closed and reinforced with flat steel strapping in accordance with the appendix of PPP-B-601.

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

3.4.2 Level B.-

* 3.4.2.1 Type I - Personnel parachute assemblies.- One personnel parachute assembly; two reserve parachute assemblies; or two canopy assemblies; packaged as specified in 3.3, shall be packed as specified in 3.4.1.1 and as shown in figure 1. The overpacking requirements specified in 3.4.1.1.1 shall not apply.

* 3.4.2.2 Type II - Cargo parachute assemblies and type III - other parachute assemblies weighing up to 90 pounds inclusive.- One assembly or multiple of assemblies of one description only, packaged as specified in 3.3.1.2, shall be packed as specified in 3.4.1.2, except that the fiberboard material for the shipping container shall conform to grade V3c or V3s of PPP-B-636. Container material may also be grade V4s of PPP-F-320.

* 3.4.2.3 Type II - Cargo parachute assemblies and type III - other parachute assemblies weighing over 90 pounds.- One assembly, packaged as specified in 3.3.1.2, shall be packed as specified in 3.4.1.3, except that domestic type plywood shall be used and the shipping container need not be strapped.

* 3.4.2.4 Major sub-assemblies (spares) for all parachutes.- All major sub-assemblies for parachutes, except the canopy assembly, shall be packed in accordance with the level B requirements of the applicable packaging data sheet or specification (see 6.2).

* 3.4.2.4.1 When applicable, a multiple of major sub-assemblies (spares) of one description only, except the canopy assembly, packaged as specified in 3.3.1.4.1, shall be packed in a snug-fitting shipping container conforming to style RSC, grade V3c or V3s of PPP-B-636. Shipping containers shall be closed in accordance with the appendix of PPP-B-636. Container material may also be grade V4s of PPP-F-320.

* 3.4.3 Level C.- Parachute assemblies, component parts and major sub-assemblies, packaged as specified in 3.3, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

* 3.5 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129. Each unbagged and unboxed component part package shall have attached a manila colored paper shipping

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:22Z
Check the source to verify that this is the current version before use.

tag for identification information. Additional requirements shall consist of marking the exterior shipping container for each parachute assembly and major sub-assembly with the date of manufacture of the item.

* 3.5.1 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
QUANTITY

3.5.2 Special marking for type I parachutes.- Each personnel parachute container's top and bottom section shall be printed on center with the colored symbol marking as shown in figure 1.

3.5.3 Special marking for types II and III.- The following special marking shall appear in lettering not less than 1-1/2 inch in height on top panel of each shipping container:

THIS SIDE UP

The sides of each shipping container shall be marked in accordance with MIL-STD-129 with letters and arrows not less than 1-1/2 inches high as follows:



4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:22Z
Check the source to verify that this is the current version before use.

Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.2.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3 Inspection of the end item.-

* 4.3.1 Examination of packaging, packing and marking.- An examination shall be made to determine that packing and marking, of this specification are complied with. Defects shall be as indicated in table II. The lot shall be all containers offered for inspection at the time. The sample unit shall be one shipping container fully prepared for delivery. The inspection level shall be S-2. The acceptable quality levels (AQLs) shall be 215, expressed in terms of defects per hundred units.

TABLE II - Examination of packaging, packing and marking.

Examine	Defect
Packaging	
Poly bag	Not type or thickness specified. Less than 6 inch extension for month. Not closed as specified. Tape, when used, less than 2 inches wide. Excess air in bag causing bulge.
Parachute, canopy assemblies or component parts as applicable	Not folded as specified. Suspension lines not chain looped. Lines not positioned on top of assembly. Component parts not folded and tied as specified. Not protected in accordance with requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:22Z
Check the source to verify that this is the current version before use.

TABLE II. - Examination of packaging, packing and marking (Cont'd.)

Examine	Defect
Packaging (cont'd)	
Interior, packaging	Box closure tape less than 2 inch width. Boxes not as specified. Bagged canopy not placed on top with suspension lines facing bottom of box. Shipping tag missing. Not manila colored paper tag. Tag not attached to component package.
Packing	
Fiberboard container	Quantity per pack not as specified. Container improperly folded. Arrangement not as specified. Fitted taped liner missing when specified. Covers not taped as specified. Tape less than 2 inches wide. Closure tape not overlapping itself a minimum of 1 inch. Less than two straps not applied as specified.
Wood shipping containers	Arrangement in wood shipping containers not as specified. Skids missing when specified. Plywood not treated with preservative. Suspension lines not facing bottom of container in unboxed component assemblies. Not packed as specified. More than two joints in box liner. Lap joint less than 1-1/4 inches. Not fastened full length with metal fasteners. Metal fasteners more than 2-1/2 inches apart. Butt joint not taped full length. Tape less than 3 inches wide. Trays less than 4 inches deep. More than one piece per tray.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:22Z
Check the source to verify that this is the current version before use.

TABLE II - Examination of packaging, packing and marking (Cont'd.)

Examine	Defect
Packing (cont'd)	
Wood shipping containers (cont'd)	Less than three staples to each flap. Flaps not securely joined as specified. Container not closed with screws as specified. Screws less than 2-1/2 inches long. Spacing of screws less than 8 inches apart. More or less than three girthwise straps.
Marking	
Interior and exterior packages	Omitted, incorrect, not legible; of improper size, location, sequence or method of application.

* 4.3.1.1 When shipping containers are required to be in accordance with PPP-B-601 and PPP-B-636, examination for defects in closure, waterproofing and strapping as applicable shall be in accordance with those specifications.

5. PREPARATION FOR DELIVERY - NOT APPLICABLE.

6. NOTES

* 6.1 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Selection of applicable levels of packaging, and packing (see 3.3, and 3.4).
(c) Desired closure for polyethylene bags (see 3.3.1.1 and 3.3.1.2).
(d) Whether dimensional changes to personnel parachute containers are authorized (see 3.4.1.1 and figure 1).
(e) When wood cleated-plywood shipping containers are required for level A overpacking of personnel parachutes and other parachutes (see 3.4.1.1.1 and 3.4.1.2.1).

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

* 6.2 All major sub-assemblies, except the canopy assembly, are covered by Army packaging data sheets and Military specifications (see 3.3.1.4, 3.4.1.4 and 3.4.2.4). The packaging data sheets are mandatory for use by the Department of Army and optional for use by all other procurement facilities of the Department of Defense. Canopy assembly requirements are detailed in the applicable paragraphs of this specification.

* 6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, delations) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.4 Copies of draving and packaging data sheets applicable to the following parachute assemblies and major sub-assemblies thereof, should be obtained from the Commanding General, U.S. Army Aviation Material Command, ATTN: AMSAV-MEI, P. O. Box 209, St. Louis, Missouri, 63166.

* PERSONNEL PARACHUTES AND MAJOR SUB-ASSEMBLIES

STOCK NO.	TITLE	PART NO.	SPECIFICATION
1670-805-9036	Parachute, Personnel, Back, 28 Ft. Dia.	P/N 50C7024-19	
NSN	Canopy Assembly	P/N 50E6877-2	MIL-P-5610
1670-365-2308	Pilot Chute	P/N 53J7205	*
1670-368-4227	Pack	P/N 52J6231	*
1670-474-2692	Harness	P/N 59J6706	*
1670-957-3786	Ripcord	P/N 62C4252-1	*
1670-803-2182	Risers	P/N 59C6704-2	*
1670-242-7070	Pad	P/N 49J6059-1	*
1670-892-4215	Parachute, Personnel, Back, 35 Ft. Dia. (Halo) (A/P 28S-3)	P/N 59C6172	
1670-086-8159	Canopy Assembly	P/N 58K6360	MIL-P-5610
1670-086-7784	Pilot Chute	P/N 60J4249	*
1670-086-7782	Harness	P/N 60J4371	*
1670-086-7783	Pack	P/N 56J6180	*
1670-072-1650	Risers	P/N 61D4386	*
1670-086-7705	Ripcord	P/N 59C6181	*
1670-999-3543	Deployment Bag	P/N 61J4453	*

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

* PERSONNEL PARACHUTES AND MAJOR SUB-ASSEMBLIES (CONT'D.)

STOCK NO.	TITLE	PART NO.	SPECIFICATION
1670-753-3727	Parachure, Personnel, Back, Type T-10, 35 Ft. Dia. (A/P 28S-2)	P/N 59E6228-6	
1670-869-1175	Canopy Assembly	P/N 49J7141	MIL-P-5610
1670-590-9909	Deployment Bag	P/N 56D6276	*
1670-925-7843	Static Line (Component of Deployment Bag)	P/N 55D6481	*
1670-368-4228	Pack Tray	P/N 52E6269	*
1670-708-4473	Risers	P/N 56C6174	*
1670-543-3732	Harness	P/N 59E6173	*
1670-543-3820	Pad	P/N 44B9637	MIL-P-38199
1670-368-4225	Static Line Extension	P/N 53D6887	*
1670-892-4219	Parachute, Personnel, Back, 35 Ft. Dia. (Maneuverable) (A/P 28S-11)	P/N 62D4316-1	
1670-702-5370	Canopy Assembly	P/N 62D4347	MIL-P-5610
1670-590-9909	Deployment Bag	P/N 56D6276	*
1670-925-7843	Static Line (Component of Deployment Bag)	P/N 55D6481	*
1670-086-7780	Pack Tray	P/N 62J4342	*
1670-086-7786	Harness	P/N 62J4344	*
1670-072-1650	Risers	P/N 61D4386	*
1670-376-8779	Parachute, Personnel, Chest, 24 Ft. Dia. T-10 Reserve	P/N 48C7155-2	
1670-377-9094	Canopy Assembly (Color/Wh)	P/N 48C7156-2	MIL-P-5610
1670-242-5377	Pilot Chute	P/N 49J7161-1	*
1670-112-9229	Pack	P/N 45J18768	*
1670-063-4500	Ripcord	P/N 62C4250	*
1670-883-8674	Parachute, Personnel, Chest, 28 Ft. Dia.	P/N 50C7023-11	
NSN	Canopy Assembly	P/N 50E6877-2	MIL-P-5610
1670-365-2308	Pilot Chute	P/N 53J7205	*
1670-112-9223	Pack	P/N 47R7637	*
1670-826-0854	Harness	P/N 59J6709	*
1670-063-4500	Ripcord	P/N 62C4250	*
1670-830-9134	Risers	P/N 59C6712	*

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

* PERSONNEL PARACHUTES AND MAJOR SUB-ASSEMBLIES (CONT'D.)

STOCK NO.	TITLE	PART NO.	SPECIFICATION
1670-892-4218	Parachute, Personnel, Chest 24 Ft. Dia. (Halo & Maneuverable Reserve)	P/N 62C4317	
RSN	Canopy Assembly	P/N 48J7156-3	MIL-P-5610
1670-251-6603	Pilot Chute	P/N 49J7161-2	*
1670-951-6417	Pack	P/N 62J4346	*
1670-063-4500	Ripcord	P/N 62C4250	*
1670-145-6968	Canopy, Jump Tower Parachute J-1	P/N 47R3276	MIL-P-5610
1670-147-5654	Canopy, Jump Tower Parachute J-2	P/N 44J9377	MIL-P-5610

* Packaging Data Sheet

CARGO PARACHUTES AND MAJOR SUB-ASSEMBLIES

STOCK NO.	TITLE	PART NO.	SPECIFICATION
1670-893-2371	Parachute, Cargo, Type G-12, 64 Ft. Dia.	P/N 55A6045	
1670-287-2955	Canopy Assembly	P/N 48K6076	MIL-P-5610
1670-039-5073	Deployment Bag	P/N 54K6299	*
1670-219-1185	Deployment Line	P/N 53D6805	*
1670-216-7297	Pilot Chute	P/N 53E6803	*
1670-841-0020	Static Line	P/N 59J6171	MIL-S-43292
1670-360-0475	Riser Extension	P/N 51D6183	*
1670-269-1107	Parachute, Cargo, Type G-11, 100 Ft. Dia.	P/N 51C6718	
1670-269-1114	Canopy Assembly	P/N 48J7841-3	MIL-P-5610
1670-368-4219	Deployment Bag	P/N 50K7415	*
1670-377-9388	Bridle	P/N 52D6354	*
1670-377-6638	Riser	P/N 53J6413	*
1670-984-3535	Parachute, Cargo, Type G-13	P/N 51B7280-5	
1670-649-5539	Canopy Assembly	P/N 51J7069-5	MIL-P-5610
1670-251-6601	Pack	P/N 51D6553	*
1670-611-4347	Static Line	P/N 51C6166	MIL-S-43292
1670-611-5507	Drogue	P/N 61D2459	MIL-D-38024

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

* CARGO PARACHUTES AND MAJOR SUB-ASSEMBLIES (CONT'D.)

STOCK NO.	TITLE	PART NO.	SPECIFICATION
1670-052-1548	Parachute, Cargo Extraction, 15 Ft. Dia.	P/N 61A4312	
1670-368-4221	Canopy Assembly	P/N 57J6032	MIL-P-5610
1670-815-2727	Deployment Bag	P/N 58J6100	*
1670-856-0265	Line, Extraction	P/N 57C6359	MIL-S-25963
1670-792-7728	Line, Reefing	P/N 62D4368	*
1670-897-4459	Cable Assembly	P/N 61B4249	MIL-C-43077
1670-687-5458	Parachute, Cargo Extraction, 22 Ft. Dia.	P/N 59B6209	
1670-090-2334	Canopy Assembly	P/N 52K6329	MIL-P-5610
1670-733-4883	Deployment Bag	P/N 58J6099	*
1670-856-0266	Line, Extraction	P/N 63J4260-1	MIL-S-25963
1670-778-9808	Adapter, Web	P/N 57D6299	*
1670-783-5988	Link	P/N 59C6196	MIL-L-40085
1670-897-4459	Cable Assembly	P/N 61B4249	MIL-C-43077
1670-687-5459	Parachute, Cargo Extraction, 28 Ft. Dia.	P/N 59B6218	
1670-928-4649	Canopy Assembly	P/N 58K6326	MIL-P-5610
1670-045-9973	Deployment Bag	P/N 58J6098	*
1670-045-9972	Line, Extraction	P/N 63J4260-2	MIL-S-25963
1670-045-9974	Adapter, Web	P/N 57D6300	*
1670-783-5988	Link	P/N 59C6196	MIL-L-40085
1670-897-4459	Cable Assembly	P/N 61B4249	MIL-C-43077
1670-294-0288	Pilot Parachute Assembly	P/N 64B22172	
1670-516-8827	Canopy, Pilot Chute, Cargo	P/N 51D6252	MIL-P-5610
1670-336-2708	Weight, Deployment, Pilot Parachute	P/N 51D6045	*
1670-360-0371	Line, Bridle, Deployment Weight	P/N 51C6055	*
1670-368-4229	Pack, Pilot Chute	P/N 53D6795	*
1670-820-3243	Line, Retaining, Pilot Chute	P/N 51C6257	*

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

* CARGO PARACHUTES AND MAJOR SUB-ASSEMBLIES (CONT'D.)

STOCK NO.	TITLE	PART NO.	SPECIFICATION
1670-242-5253	Pack, Cargo Parachute, G-1A	P/N 51K6164	*
1670-788-8666	Parachute, Cargo, 12 Ft. Dia. Ringslot	P/N NLABS 11-1-216	
NSN	Canopy Assembly	P/N 11-1-217	MIL-P-5610
1670-912-4484	Deployment Bag	P/N 11-1-218	*

* Packaging Data Sheets

Custodians:

Army - GL
Navy - AS
Air Force - 82

Review activities:

Army - AV, SM, GL
Navy - AS
Air Force - 11, 82

User activities:

Navy - MC

Preparing activity:

Air Force - 82

Project No. 1670-0288

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

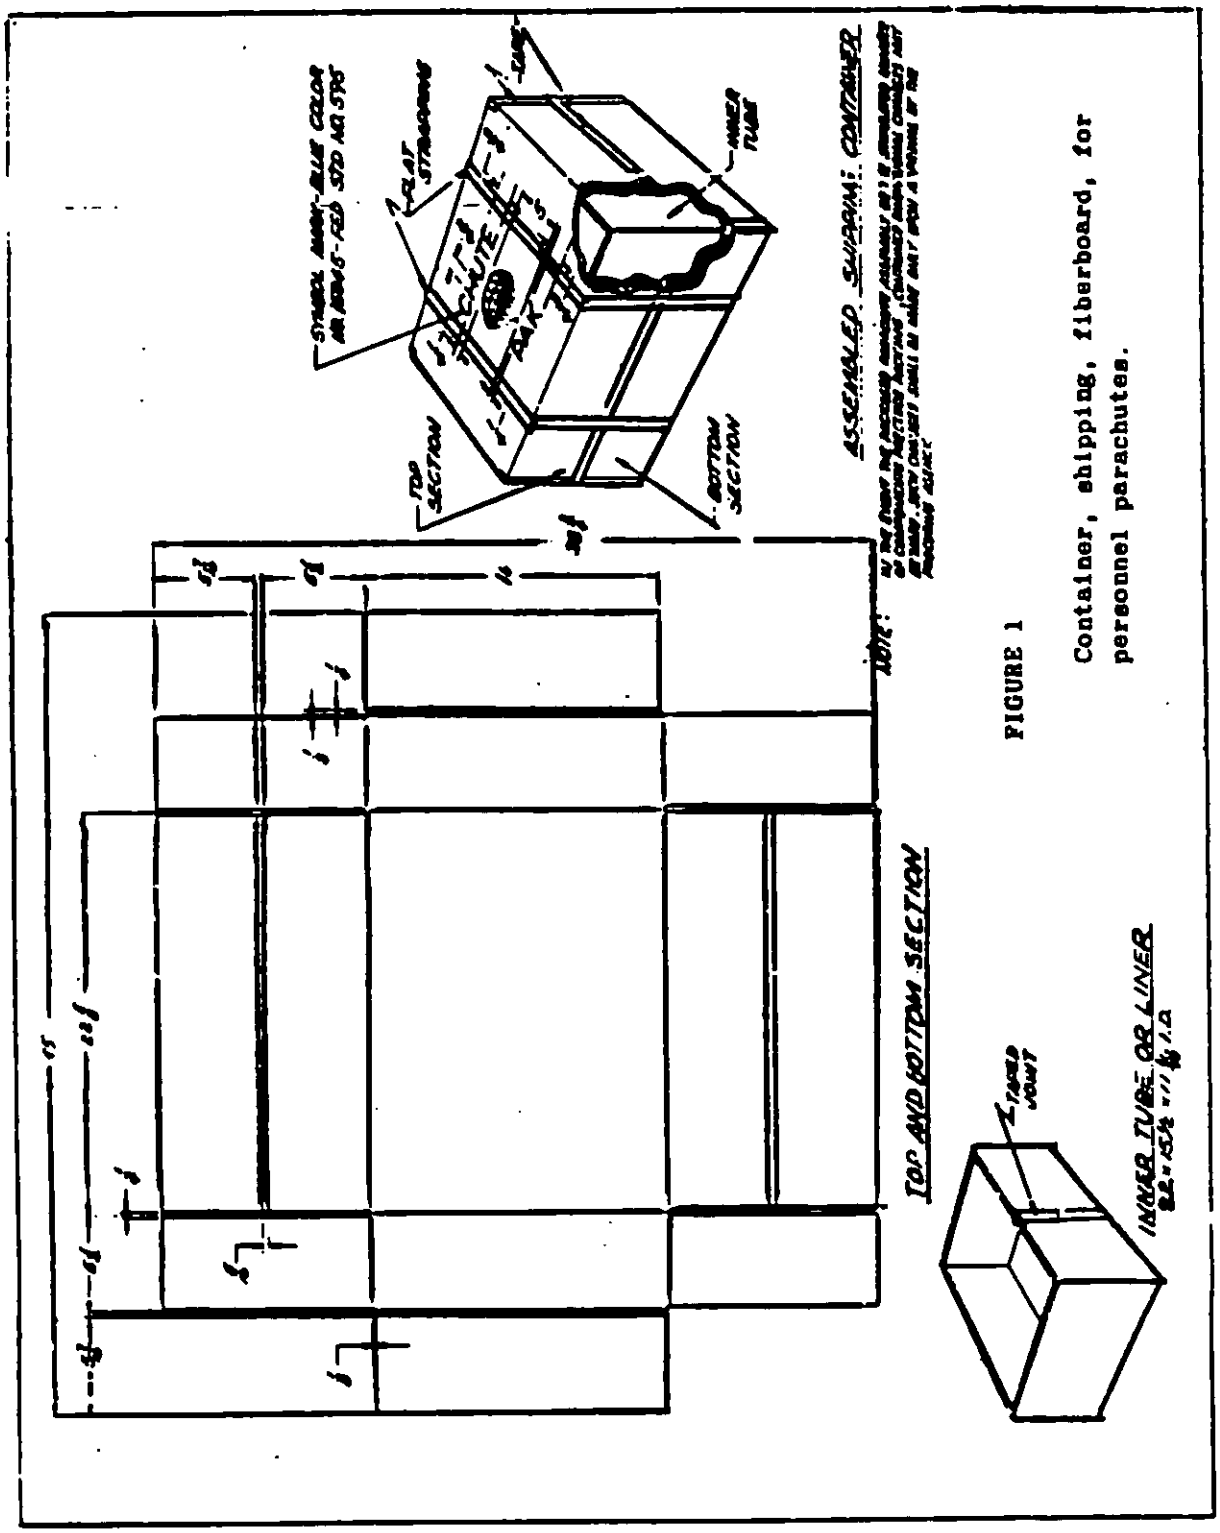


FIGURE 1

Container, shipping, fiberboard, for personnel parachutes.

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 8, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

San Antonio ALC
Kelly AFB TX 78241

Source: https://assist.dla.mil -- Downloaded: 202640-17T05:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:22Z
Check the source to verify that this is the current version before use.