
MILITARY SPECIFICATION SHEET

SWITCHES, TOGGLE, MAGNETIC HOLD-IN, DPDT

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-5594.

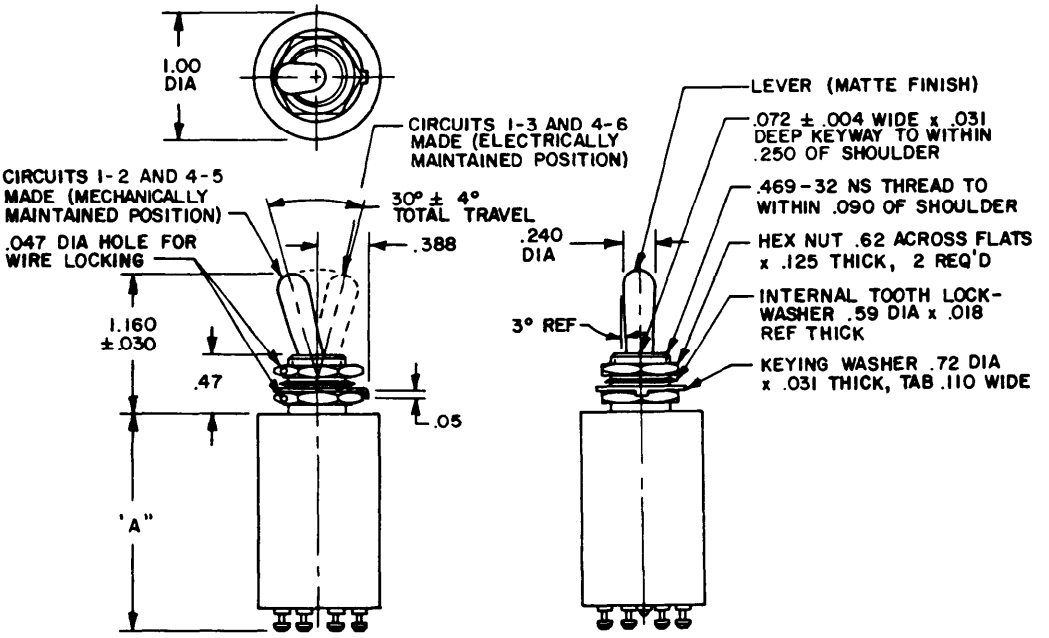

PART NO.	"A" MAX
M5594/2-1	1.870
M5594/2-2	1.975





FIGURE 1. Switch.

Ⓑ denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 202640-17T05:18Z
Check the source to verify that this is the current version before use.

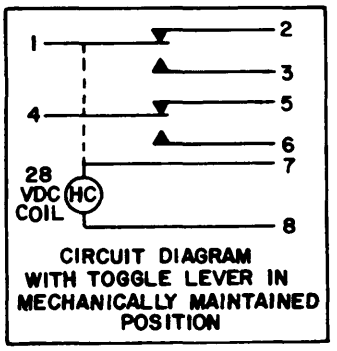

INCHES	MM	INCHES	MM	INCHES	MM
.004	.10	.090	2.29	.59	15.0
.018	.46	.110	2.79	.62	15.8
.030	.76	.240	6.10	.72	18.3
.031	.79	.250	6.35	1.00	25.4
.047	1.19	.388	9.86	1.160	29.46
.05	1.27	.469	11.91		
.072	1.83	.47	11.9		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) on three place decimals and ±.02 (.5 mm) on two place decimals.
4. Energizing the coil will not cause transfer of circuits.
5. M5594/2-2 is suitable for operation in an ambient temperature of 180° F.

FIGURE 1. Switch - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Weight: 4 oz. maximum.

Material:
Toggle lever and bushing: Corrosion resistant steel.
Housing: Steel with an epoxy based enamel finish.

Operating characteristics: See table I.

Electrical ratings: See table II.

Qualification:
Group submission: See table III.

Enclosure design: All entrances to the switch cavity except through the toggle bushing shall be sealed by fusion of glass to metal, metal to metal, or ceramic to metal.

Ⓑ TABLE I. Operating characteristics.

Part number	Solenoid ratings at 20°C					
	Steady rate (volts, dc)	Hold-in (volts, dc)	Drop-out (volts, dc)	Minimum coil resistance (ohms)	Maximum override force (lbs)	Maximum operating force (lbs)
M5594/2-1	20-29	15	0-15	220	10	7
M5594/2-2	20-29	15	0-15	460	5	7

TABLE II. Electrical ratings.

Load	28 Vdc	
	Sea level	65,000 ft.
Resistive	4	4
Inductive	2.5	2
Motor	4	4

TABLE III. Qualification inspection group submission.

Examination or test	Basic switch	Other switch samples	Extent of approval
Sample nos. 1 thru 14, 21 & 22 of table II of MIL-S-5594.	M5594/2-2	M5594/2-1 Sample nos. 21 & 22 of table II of MIL-S-5594.	All

Preparing activity:
Navy - AS

(Project 5930-N480-4)

☆U.S. GOVERNMENT PRINTING OFFICE: 1977 — 703-122/439

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-5594/2B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Air Engineering Center, ESSD Code 93A3
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.