SWITCH, TOGGLE, MAGNETIC HOLD-IN, DP3T

The complete requirements for procuring the switches described herein shall consist of this document and the issue in effect of Specification MIL-S-5594.

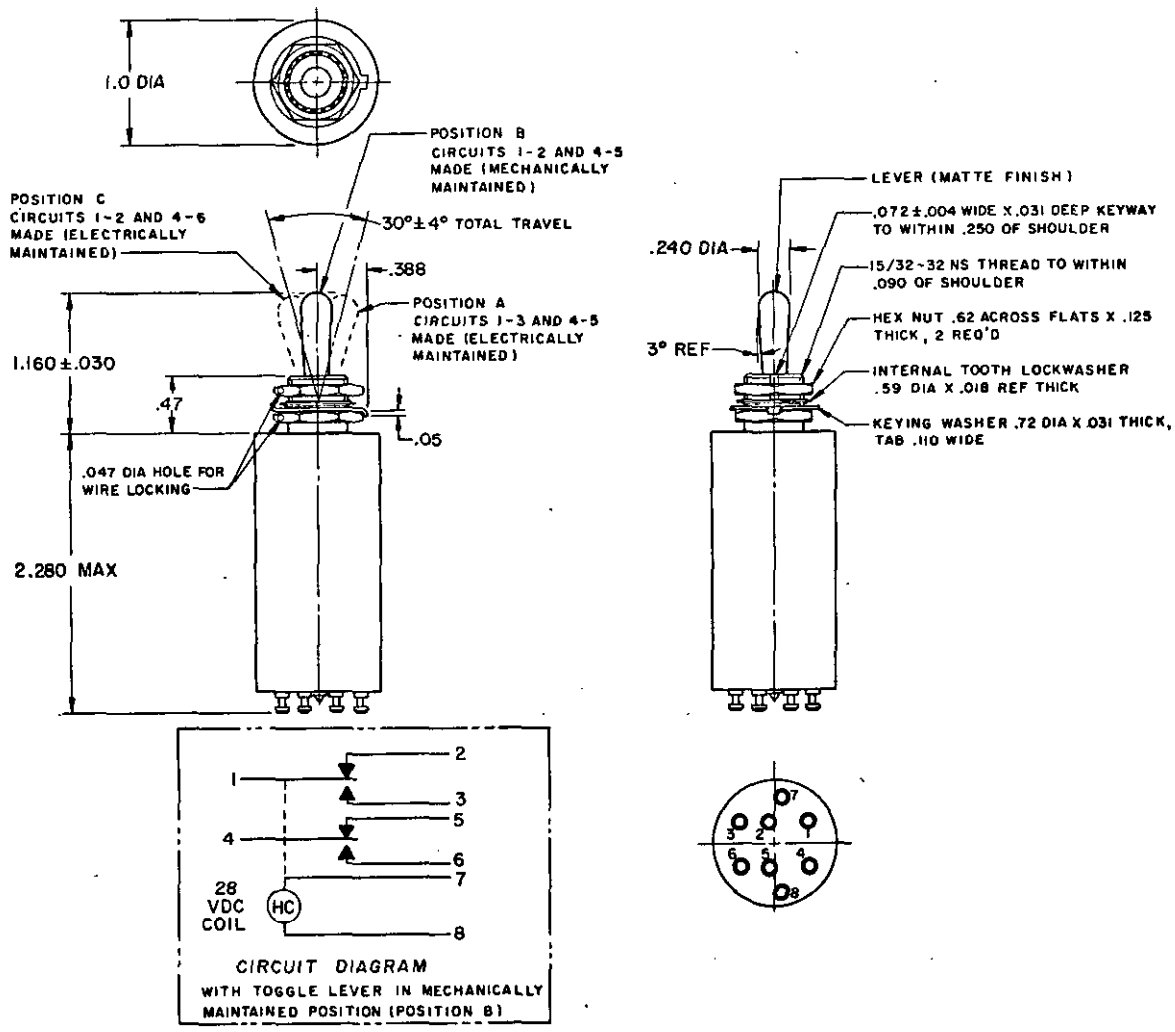

NOTES:
1. Unless otherwise specified, tolerances are ±.005 for three place decimals, ±.015 for two place decimals and ±.030 for one place decimals.
2. Energizing the coil will not cause transfer of circuits.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:	See figure.
Weight:	4 oz. maximum.
Material:	
Toggle lever and bushing:	Corrosion resistant steel.
Enclosure:	Steel with an epoxy based enamel finish.
Operating Characteristics:	
Solenoid ratings at 20°C:	
Steady State:	20-29 VDC.
Hold-in:	15 VDC.
Drop-out:	0-15 VDC.
Coil resistance:	220 ohms minimum.
Electrical ratings:	See Table I.
Enclosure design:	All entrances to the switch cavity except through the toggle bushing shall be sealed by fusion of glass to metal, metal to metal, or ceramic to metal.

TABLE I

ELECTRICAL RATINGS

LOAD	28 VDC	
	SEA LEVEL	65,000 Ft.
Resistive	7	5
Inductive	2	1.5

Part number: M5594/3-1.

Preparing Activity:
Navy - AS

Project Number 5930-N402-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.