MILITARY SPECIFICATION SHEET

SWITCH, TOGGLE, MAGNETIC HOLD-IN, DP3T, LEVER LOCK

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switch described herein shall consist of this document and the latest issue of Specification MIL-S-5594.


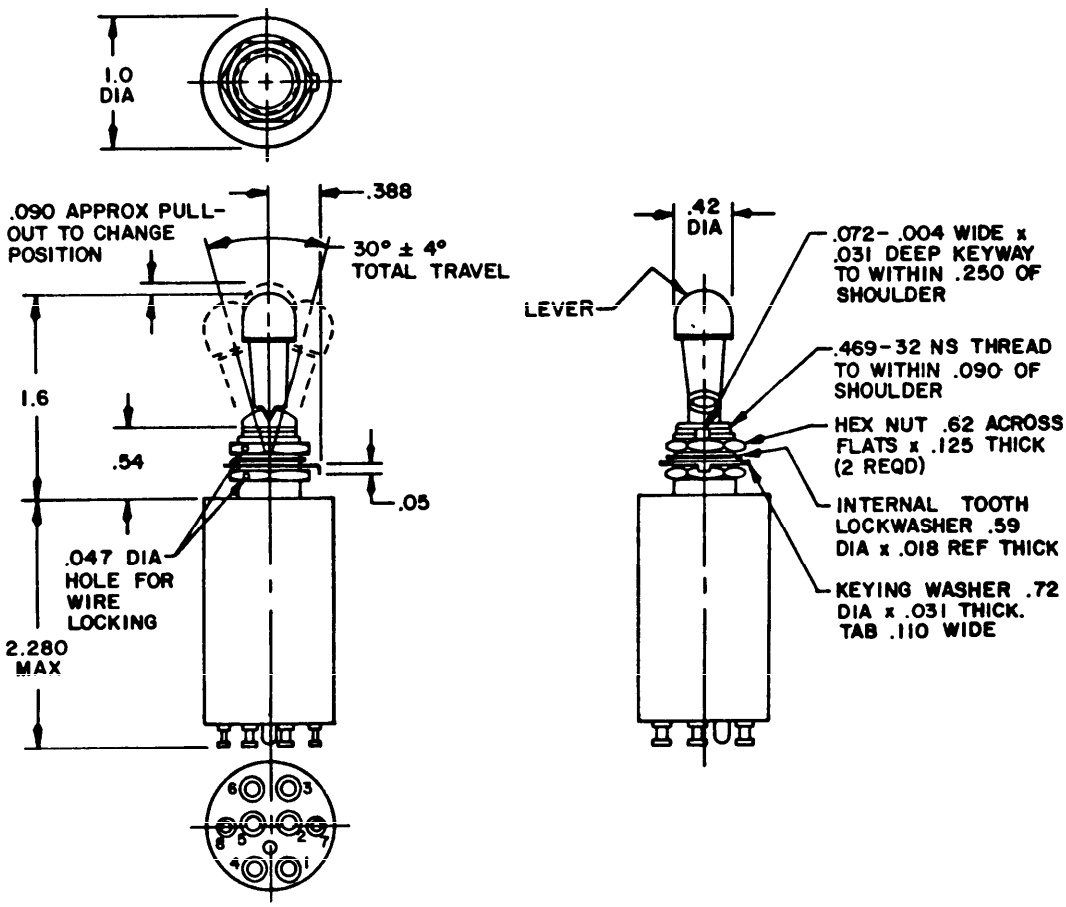


FIGURE 1. Switches.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.

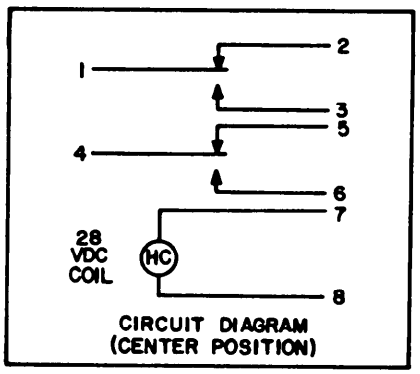

INCHES	MM	INCHES	MM	INCHES	MM
.004	.10	.110	2.79	.59	15.0
.018	.46	.125	3.18	.62	15.7
.031	.79	.250	6.35	.72	18.3
.047	1.19	.388	9.86	1.0	25.4
.05	1.3	.42	10.7	1.6	40.6
.072	1.83	.469	11.91	2.280	57.91
.090	2.29	.54	13.7		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) on three place decimals, ±.015 (.38 mm) on two place decimals, and ±.030 (.76 mm) on one place decimals.
4. Energizing the coil will not cause transfer of circuits.
5. Locking arrangement: Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released.

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Circuitry and locking function:

Circuitry: With lever in keyway side, switch circuits "1-3" and "4-5" are made. With lever in center position, switch circuits "1-2" and "4-5" are made. With lever opposite keyway side, switch circuits "1-2" and "4-6" are made.

Locking function: When the toggle lever is in either extreme of its throw and not in a mechanically locked position, it is electrically held in that position. The center position is mechanically maintained. It is only "locked" in the center position when using locking combinations "B" "E" or "K".

Locking combinations
(Keying side)

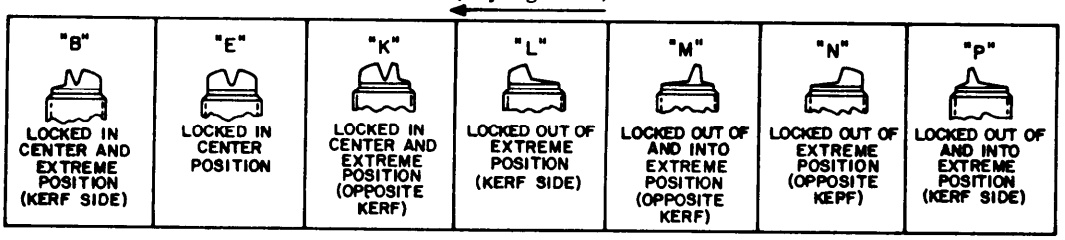

Locking combination figures do not represent details of construction. They schematically illustrate locking configuration.

TABLE I

Part 1/ number	Available locking combinations
M5594/6-1	B, E, K, L, M, N and P

1/ Part number example:
M5594/6-1B (Locking combination "B")

Dimensions and configuration: See figure 1.

Weight: 6 oz. maximum.

Material:
Toggle lever and bushing: Corrosion resistant steel.
Enclosure: Steel with an epoxy based enamel finish.

Operating characteristics:
Solenoid ratings at 20°C:
Steady state: 20-29 Vdc.
Hold-in: 15 Vdc.
Coil resistance: 220 ohms minimum.
Electrical ratings: See table II.

Enclosure design: All entrances to the switch cavity except through the toggle bushing shall be sealed by fusion of glass to metal, metal to metal, or ceramic to metal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.

Mechanical endurance: Switches shall be tested with toggle levers in unlocked position. The lever lock switch handles shall also be tested for 20,000 actuations, at room ambient conditions, by pulling the lever to its fully extended position and then permitting it to return to its fully retracted position without operation of the switches, at a maximum of 60 cpm.

Qualification: Table II of MIL-S-5594. Samples no. 1 thru 14, 21 and 22. When a manufacturer is qualified to MIL-S-5594/3 and the product being covered by this specification sheet is the same as that MIL-S-5594/3 QPL item except for the lever lock mechanism, only the mechanical endurance of lever lock test must be performed for qualification.

Part number: See table I.

TABLE II. Electrical ratings.

Load	28 Vdc	
	Sea level	65,000 feet
Resistive	7	5
Inductive	2	1.5

Preparing activity:
Navy - AS

(Project 5930-N480-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-17T05:18Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DOD 316



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards
Department (ESSD) Code 93
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:18Z
Check the source to verify that this is the current version before use.