NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/250
30 June 1997
SUPERSEDING
MIL-DTL-3946/68
29 December 1995

DETAIL SPECIFICATION SHEET

MEDAL, KUWAIT LIBERATION MEDAL, GOVERNMENT OF KUWAIT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

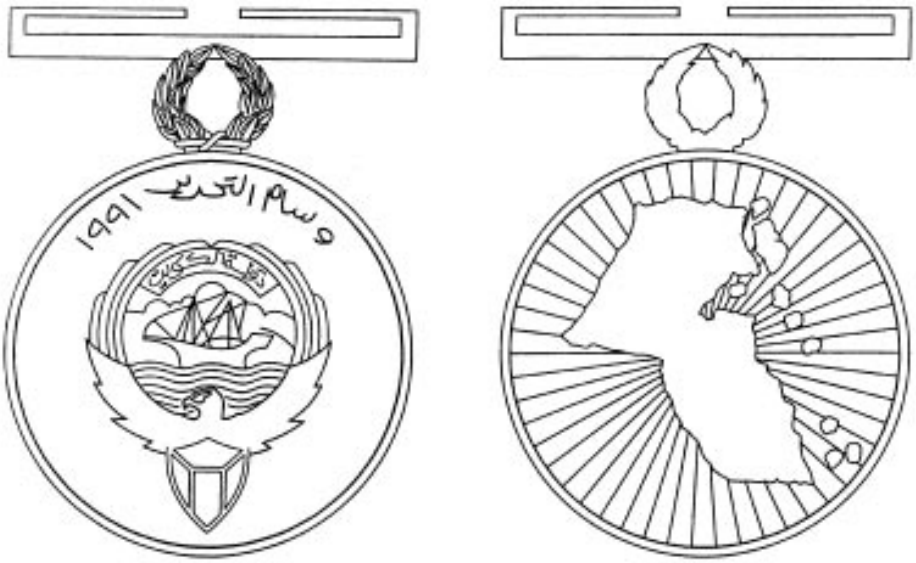

OBVERSE REVERSE

DASH NO.
-1: Full Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 4.

DIMENSIONS:
DIAMETER:
-1: 1-9/16 inches (3.97 cm) (REF)
-2: 3/4 inch (1.91 cm) (REF)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:43Z
Check the source to verify that this is the current version before use.

HEIGHT (Including attaching wreath design):
-1: 2-1/8 inches (5.40 cm) (REF)
-2: 1-1/16 inches (2.70 cm) (REF)

THICKNESS (At Thickest Point):
-1: 0.100 inch ± 0.010 inch (0.254 cm ± 0.025 cm)
-2: 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The enameled areas shall be located in the bottom of the medal design in the shield shape object as indicated below and shall conform to the TIOH color chips Red # 1, Green # 12, Black # 26 and White # 28.

Top of shield - Black # 26
Lower left side of shield - Red # 1
Lower center of shield - White # 28
Lower right side of shield - Green # 12

3. Interior center of attaching wreath and ribbon bar shall be pierced.

4. Medal set shall consist of a regular size medal, a miniature size medal and a ribbon all packaged in a presentation case conforming to MIL-C-14633, Type XVI with a Class 1 or 1A pad.

5. Pendant shall be lacquered.

6. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/466.

7. The top bar of the suspension bar shall have a 3/16 inch ± 132 inch (0.48 cm ± 0.08 cm) notch at the center to facilitate attaching the pendant drape.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
DLA - CT

(Project No. 8455-0897)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:43Z
Check the source to verify that this is the current version before use.