NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/259C
26 September 2022
SUPERSEDING
MIL-DTL-3943/259B
28 November 2017

DETAIL SPECIFICATION SHEET

MEDAL, CIVILIAN COMBAT SUPPORT, DEFENSE INTELLIGENCE AGENCY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

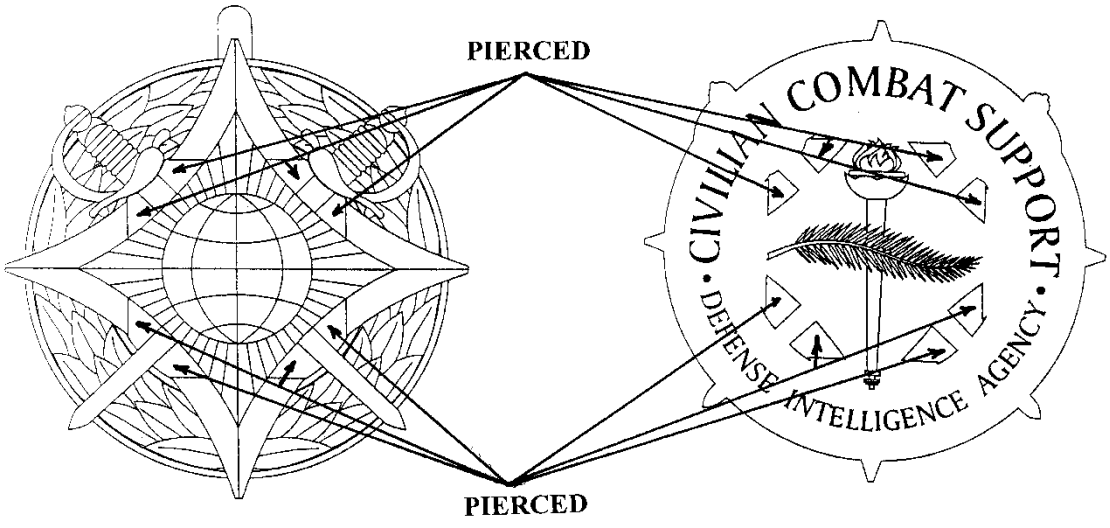

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Brass, Oxidized, Buffed Relieved and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 4.

DIMENSIONS:
DIAMETER (Circumscribed): 1-3/8 inches (REF)
HEIGHT (Including lug): 1-15/32 inches (REF)
THICKNESS (At thickest point): 0.135 inch ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:46Z
Check the source to verify that this is the current version before use.

DECORATION SET AND CASE: Unless requisition documents state otherwise, medal sets shall consist of regular size medal and a lapel button. Each medal and lapel button shall be mounted on a box pad, completely wrapped with not less than three sheets of anti-tarnished paper or heat sealed in a snug-fitting transparent polyethylene film 0.002 inch minimum thickness and packaged in a folding box conforming to Variety 1, Style II, Grade A, Class 1 of PPP-B-566. The mounting pad shall be fabricated from white sulfite board 0.030 inch minimum thickness. The face side may be covered with plush. The pad shall have three slits formed into a triangular shape to accommodate the pendant. Pads shall be approximately 4-3/16 inches in length by 2-1/16 inches in width. The boxes for the regular medals shall be approximately 4-1/4 inches in length by 2-1/8 inches in width by 1/2 inch in depth. The boxes shall be cobalt blue in color. Boxes of any other color must be approved by the contracting officer.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The specification slash sheet for the ribbon for the pendant drape is MIL-DTL-11589/497.

3. The specification slash sheet for the lapel button is MIL-DTL-11484/253.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
DIA - DI

Preparing activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8455-2022-272)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:46Z
Check the source to verify that this is the current version before use.