MIL-C-36445A
9 May 1967
SUPERSEDING
MIL-C-36445
11 October 1965

MILITARY SPECIFICATION

FOR

COAT, MAN'S, MEDICAL ATTENDANT

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers a cotton coat (see 6.1).

1.2 Classification.- The coat shall be of one type in the following sizes as specified (see 6.2):

Schedule of sizes

Short	Regular	Long
36	36	36
38	38	38
40	40	40
42	42	42
44	44	44
46	46	46
48	48	48

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton,
UU-P-268 - Paper, Kraft, Untreated, Wrapping.
CCC-C-430 - Cloth, Sheeting, Cotton.
CCC-C-461 - Cloth, Uniform Twill, Cotton.
DDD-L-20 - Label; For Clothing, Equipage, and Tentage, (General Use).
PPP-B-636 - Box, Fiberboard.

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-10884 - Fasteners, Snap.

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Samples.- Guide samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 Preproduction sample.- When required (see 6.2), before production is commenced, a sample of the finished coat shall be submitted to or made ready for the contracting officer or his authorized representative for inspection as specified in 4.2.1. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.3 Materials.-

3.3.1 Basic material.- The basic material shall be white cotton uniform twill conforming to type IV of CCC-C-461.

3.3.2 Sheeting.- The cotton sheeting used for front and collar interlinings and binding armholes shall conform to type II, class 2, style A of CCC-C-430, and shall be bleached to match shade White 3007.

3.3.3 Thread.- The thread used for seaming and stitching shall be cotton, bleached white, type IA2, ticket Nos. 50, 3 ply and 70, 2 ply of V-T-276.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:36Z
Check the source to verify that this is the currentversion before use.

3.4 Snap fasteners.- The snap fasteners shall conform to style 2A, finish 3, 20-line, of MIL-F-10884.

3.5 Label.- Each coat shall have a combination size and identification label conforming to type I, classes 1 and 2 of DDD-L-20. The label shall include the information required by the applicable products labeling act and the supplier's registration number. The fastness to laundering requirements of DDD-L-20 shall apply.

3.6 Design.- The coat is a single-breasted, straight front coat closed with three snap fasteners. It has notched lapels and a rolled-type collar. There are two lower patch pockets, one on each forepart and a left breast patch pocket with a pencil compartment. The back is two-pieced (see figure 1).

3.7 Figure.- The figure is furnished for information only. To the extent of any inconsistencies between the specification and the figure, the specification shall govern.

3.8 Patterns.- Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which show size, directional lines and notches for correct assembling and shall not be altered in any way. The patterns provide a 1/2 inch seam allowance for double-lapped, double-stitched seams and 3/8 inch for all other seams, except for collar joining seams where allowance is 5/16 inch.

3.8.1 Pattern parts.- The component parts of the coat shall be cut from specified material in accordance with number of parts required, as shown in table I.

TABLE I.- List of pattern parts

Material	Pattern nomenclature	Cut parts
Uniform twill	Front	2
	Back	2
	Facing (front) 1/	2
	Top sleeve	2
	Undersleeve	2
	Top collar	1
	Undercollar 2/ 3/	2
	Patch pocket (lower)	2
	Patch pocket (breast)	1
Sheeting	Interlining (front) 1/	2
	Interlining (collar) 2/ 3/	2
	Pocket templates	

1/ Same pattern part, with cut-off line below lapel point for interlining front.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

e piece.

collar collar be cut on th one piece.

types
r more seam
may be used.
e inside stitching types
sewn so Std. No. two or more seam
l result, of chemmay be
double- for the operation, shall be on the outside
on the allowance shall maintained
edges seams shall be
stitch shall 3/16 5/16 inch from the edge on the
he cord.

ches per inch. The minimum and maximum number of stitches per
gs when
n 1/4 in the table II.

s than
back
401 seams or stitchings, shall be backed not less than 1/4
seams or stitchings shall be overlapped not less tha
read breaks on all stitch types shall be secured by stitching bac
ured than Skipped stitches or thread breaks on 401
ar required basic 301 stitch type.

ting
operations or statements, the coat shall be manufactured
ith operation requirements specified in table II The supplier
to follow the exact sequence of operations listed Any deviation
which used to facilitate manufacture is permissible provided
d or removed or does not show the finished coat

the parts of the coat shall be marked to insure correct
identical seams throughout the coat. Any method
except

creased stitching does.

-on type

ed seam types shall have adhesive tapes of paper or adhesive
as primary or removable tapes.

Source: https://assist.dla.mil -- Downloaded: 20260-21T08:36Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
1.	Cutting.- a. Cut coat in strict accordance with patterns furnished which show size, shape, directional lines and notches for proper assembly. Directional lines shall be on the warp. b. Cut all component parts from one piece of basic material except undercollar which may be cut from ends. c. Cut strips of basic material, or sheeting, for hanger loop of sufficient width to comply with operation 4. d. Cut strips of sheeting material for binding armholes on the bias and of sufficient width to finish as follows: Binding shall be turned under 1/4 inch on each raw edge and shall finish 1/4 inch wide on bound seams.					
2.	Marking (see 3.10.1).- Mark or ticket all component parts of the coat to insure correct size, uniform shade and proper assembly.					
3.	Replacement of damaged parts.- a. Replace at time of cutting, any part containing a hole, smash, multiple float or loose slub.					

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T08:36Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN or LOOPER
3.	Replacement of damaged parts.- (cont'd)					
	b. Replace any part damaged during manufacturing operation by needle chew, cut, tear, hole, burn or large exposed drill hole. Unit containing a visible mend will not be acceptable.					
4.	Make hanger (basic material or binding) (see oper. 1c).-					
	a. Stitch stripping with cover stitch on the underside. Hanger shall finish 3/8 to 1/2 inch wide and of sufficient length to finish 2 to 2-1/4 inches long.	406 406	EFh-1 EFh-1	10-14 10-14	50-3 50-3	70-2 70-2
	- or -					
	b. Fold stripping in half lengthwise and with raw edges turned in; stitch 1/16 to 1/8 inch from edge. Finished hanger shall measure as in "a" above.	301 301	EFp-1 EFp-1	10-14 10-14	50-3 50-3	50-3 50-3
5.	Make patch pockets.-					
	Turn top of pocket as indicated by notches on pattern and with raw edge turned in, stitch 1/16 to 1/8 inch from turned edge. Hem shall finish 1-1/8 ± 1/8 inches wide.	301 301	EFb-1 EFb-1	10-14 10-14	50-3 50-3	50-3 50-3
6.	Make collar.-					
	a. Join under collar pieces (if cut in 2 pieces), spread seam open and stitch with two rows of stitching 1/16 inch gage.	301 or 401	SSz-3 SSz-3	10-14 10-14	50-3 50-3	50-3 70-2

Source: https://assist.dla.mil - Downloaded: 2026-02-10T08:36Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
6.	Make collar.- (cont'd)					
	b. Overlap sheeting interlining pieces (if cut in 2 pieces) and stitch.	301 or 401	LSa-1 LSa-1	10-14 10-14	50-3 50-3	50-3 70-2
	c. Superimpose interlining on undercollar and stitch 1/16 to 1/8 inch from edge all around outer edge.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2
	d. Stitch through undercollar and interlining at breakline. Quilt undercollar stand with not less than three additional rows of stitching, 3/16 to 1/4 inch apart.	301 301	SSa-1 and SSv-	10-14 10-14	50-3 50-3	50-3 50-3
	e. Stitch through undercollar and interlining diagonally between bottom of collar stand and top edge of collar with points 2-7/8 to 3 inches apart.	301	SSv-	10-14	50-3	50-3
	f. Superimpose quilted undercollar on top collar and stitch.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50-3 50-3	50-3 70-2
	g. Trim, turn, work out edges and stitch with 2 rows of stitching 1/4 inch apart, with the first row 1/16 to 1/8 inch from turned edge.	301	SSe-2(b)	10-14	50-3	50-3
7.	Make sleeve.-					
	a. With notches matched, join top sleeve to undersleeve at outseams with a double-lapped, double-stitched seam. The top sleeve shall be over the undersleeve.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
7.	Make sleeve.- (cont'd)					
	b. Join the top sleeve to undersleeve at inseams with a double-lapped, double-stitched seam. The top sleeve shall be over the undersleeve.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2
	c. Turn bottom of sleeve as indicated by marks on pattern, turn under raw edge and stitch 1/16 to 1/8 inch from turned edge. Hem shall finish 1-1/2 ± 1/8 inches wide.	301	EFb-1	10-14	50-3	50-3
8.	Sew on lower patch pockets.-					
	a. Position right and left lower patch pockets on fronts as indicated by marks on pattern. Turn in raw edges and stitch pockets to fronts with two rows of stitching 1/4 inch gage with the outer row of stitching 1/16 to 1/8 inch from edge. Pocket may be precreased.	301	LSd-2	10-14	50-3	50-3
	b. The finished pockets shall measure 6-5/8 ± 1/8 inches wide and 7-7/8 ± 1/8 inches deep.					
	Sizes — Width (inches) — Depth (inches) 36 thru 40 — 6-3/8 ± 1/8 — 7-7/8 ± 1/8 42 thru 48 — 6-7/8 ± 1/8 — 7-7/8 ± 1/8					
	c. Tack each end of pocket opening with a vertical bartack or tack superimposed on the inner row of stitching.	Bartack or 301		28 per bartack 28 per tack	50-3 50-3	50-3 50-3

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:36Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
9.	Make and sew on front facings.-					
	a. Seam interlining to facing at outer edge, notch to notch, 1/16 to 1/8 inch from edge.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2
	b. Seam facings to front, from lapel notch to cut-out at bottom, and continue stitching across facing, at bottom.	301 or 401	SSe-3(a) SSe-3(a)	10-14 10-14	50-3 50-3	50-3 70-2
10.	Join back seam.-					
	Join backs together with a double-lapped, double-stitched seam, with the left back over the right.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2
11.	Join shoulder seam.-					
	Join shoulders with a double-lapped, double-stitched seam, with the backs over the fronts.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2
12.	Sew on collar.-					
	a. Position collar between fronts and facings and stitch from notches to 3/4 to 1 inch from top ends of facing. Notch seam allowances and continue stitching undercollar to back of neck.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2
	b. Turn facing, turn in raw edge of top collar and stitch to neck 1/16 to 1/8 inch from edge, catching top ends of facing with raw edges turned in at shoulder seams and ends of hanger loop, evenly spaced at center back, in the stitching.	301	LSd-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
13.	Attach label.-					
	Position combination label on center back with top of label not more than 1/4 inch below the collar joining seam and seam on all sides.	301	LSbj-1	10-14	50-3	50-3
	Note: Top edge of label may be caught in collar seam of operation (12.b), with remaining three sides seamed.					
14.	Join side seam.-					
	a. Join side seams with a double-lapped, double-stitched seam with the backs over the fronts.	301 or 401	LSc-2 LSc-2	10-14 10-14	50-3 50-3	50-3 70-2
15.	Finish front edges.-					
	Stitch front edges with two rows of stitching 1/4 inch gage with the first row of stitching 1/16 to 1/8 inch from turned edge, along front, across bottom the full width of facing and across lapel with the double row of stitcing meeting stitching at collar.	301	SSe-3(b)	10-14	50-3	50-3
16.	Set sleeves.-					
	a. Set sleeve to armhole, matching notches, and stitch.	301	LSq-2(a)	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T08:36Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
16.	Set sleeves.- (cont'd)					
	b. Bind edges of armhole and sleeve together with the bias cut binding with one end of binding overlapping, turned under and tacked.	301 Bartack or 301	BSc-1	10-14 28 per bartack 28 per tack	50-3 50-3 50-3	50-3 50-3 50-3
	c. Turn bound edge toward shoulder and raise stitch 1/16 to 1/8 inch around armhole.	301	LSq-2(b)	10-14	50-3	50-3
17.	Hem bottom and stitch facing.-					
	a. Turn up bottom of coat to form a hem 3/4 ± 1/8 inch wide, turn in raw edge and stitch 1/16 to 1/8 inch from edge.	301	EFb-1	10-14	50-3	50-3
	b. With raw edge turned under, stitch back edge of facing to coat, 1/16 to 1/8 inch from turned edge. Continue stitching across top edge of facing through shoulder seam.	301	LSd-1	10-14	50-3	50-3
18.	Sew on breast pocket.-					
	a. Position pocket on left front as indicated by marks on pattern. Turn in raw edges and seam to coat with two rows of stitching 1/4 inch gage, with the outer row 1/16 to 1/8 inch from turned edge (may be precreased).	301	LSd-2	10-14	50-3	50-3
	b. Stitch through entire length of pocket and coat 1-3/8 ± 1/8 inches from left edge of pocket, forming a pencil pocket.	301	SSv-1	10-14	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE II	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
18.	Sew on breast pocket.- (cont'd)					
	c. The finished breast pocket shall measure 4-3/4 ± 1/8 inches wide and 4-7/8 ± 1/8 inches deep.					
	d. Bartack or tack each end of pocket opening and top of pencil pocket with vertical bartacks or tacks superimposed on inside row of stitching at either end of opening and on pencil pocket position stitch.	Bartack or Tack		28 per bartack 28 per tack	50-3 50-3	50-3 50-3
19.	Snap fasteners.-					
	a. Attach socket portions of the fasteners on the left front of coat as indicated by marks on pattern, with center of fastener 5/8 to 3/4 inch from the finished edge.					
	b. Attach stud portion of the fastener on the right front of coat to correspond with sockets on left front with center of fastener 5/8 to 3/4 inch from the finished edge.					
20.	Clean.-					
	a. Remove all spots, stains and shade tickets.					
	b. Trim all loose threads.					
21.	Press.-					
	Press entire coat with heated iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

3.11 Sizes and measurements.- The sizes and measurements of the finished coat shall be in accordance with table III. All measurements and tolerances are expressed in inches.

TABLE III.- Table of measurements

Size	36	38	40	42	44	46	48	Tolerance
Chest 1/	41	43	45	47	49	51	53	± 1
Sleeve inseam 2/								
Short	16-1/2 (all sizes)							+ 3/4, -1/2
Regular	17-1/2 (all sizes)							+ 3/4, -1/2
Long	18-3/4 (all sizes)							+ 3/4, -1/2
Back length 3/								
Short	28	28-1/4	28-1/2	28-3/4	29	29-1/4	29-1/2	± 1/2
Regular	29-1/2	29-3/4	30	30-1/4	30-1/2	30-3/4	31	± 1/2
Long	31	31-1/4	31-1/2	31-3/4	32	32-1/4	32-1/2	± 1/2

1/ With coat buttoned, laid flat and smooth, measure across front from folded edge to folded edge, at base of armholes.

2/ Measure along sleeve inseam, from base of armhole to bottom of sleeve.

3/ Measure along center back seam from base of collar to bottom of coat.

3.12 Workmanship.- The finished coat shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise stated in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

4.2 Inspection for acceptance.- Inspection shall be in accordance with provisions of MIL-STD-105, unless otherwise indicated herein.

4.2.1 Preproduction sample inspection.- The preproduction sample, when submitted in accordance with 3.2, shall be inspected as specified in 4.2.3.2 through 4.2.3.4 for compliance with design, workmanship and dimensional requirements.

4.2.2 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in the specification or applicable purchase documents.

4.2.3 Examination of the end item.- The classification of defects found during this examination shall be in accordance with defects listed in 4.2.3.2 through 4.2.3.4. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.2.3.5. The sample unit shall be one coat.

4.2.3.1 Classification of defects.- All visual defects shall be classified as indicated below:

4.2.3.2 General defects.-

Defect	Classification Major	Minor A	Minor B
Material defects and workmanship damages			
a. Any hole.	X		
b. Needle chew, cut, tear, visible mend, or burn.	X		
c. Any weakening defect such as a smash, multiple float or loose slub.	X		
Shaded parts			
Any outside part shaded.	X		
Cleanness			
a. Spots or stains on outside.	X		
b. Shade stamping exposed on outside.		X	
c. Thread ends not removed throughout garment.			X
d. Two or more shade tickets not removed.			X
e. Any visible basting stitch.			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:36Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Component and assembly			
Any component part or required operation omitted (unless otherwise classified herein).	X		
Cutting			
Any component part not cut in conformance with directional lines on pattern.	X		
Pressing			
a. Burned or scorched.	X		
b. Pressing omitted.		X	
Seams and stitching			
a. General:			
1. Any part of garment caught in any unrelated operation or stitching.	X		
2. Seams twisted, puckered or pleated (unless otherwise classified herein).	X		
3. Ends of all stitching when not caught in other seams or stitchings, backtacked less than 1/4 inch.			X
4. Thread breaks (all stitch types) stitched less than 1/2 inch beyond each end of break.		X	
5. Continuous line of stitching overlapped less than 1/2 inch.		X	
b. Gage of stitching:			
1. Unevenly gaged or various stitching not uniform.			X
2. Beyond width specified or varies more than 1/16 inch when no range is specified.			X
3. Less than 1/16 inch from edge.		X	
c. Open seams:			
1. On all seams, except hems:			
- up to 1/2 inch, inclusive			X
- 1/2 inch to 1 inch, inclusive		X	
- over 1 inch.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:36Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
c. Open seams: (cont'd)			
2. On hems, more than 1 inch.			X
Note: Double-stitched seams are considered open when either one or both sides of seams are open.			
d. Raw edges:			
1. On outside:			
- 1/4 inch to 1/2 inch, inclusive			X
- 1/2 inch to 1 inch, inclusive		X	
- over 1 inch.	X		
2. On inside, over 1 inch.		X	
Note: Raw edges not securely caught in stitching shall be classified as open seams.			
e. Runoffs:			
1. Joining seam - when resulting in an open seam, use "open seams" classification.			
2. Edge or raised stitching (when not resulting in an open seam):			
- over 1 inch.		X	
f. Seam and stitch type:			
1. Wrong seam or stitch type.		X	
2. Looper thread (when stitch type 401 is used) on outside.	X		
g. Stitches per inch (to be scored only when condition appears on major portion of seams or stitching):			
1. Less than minimum specified.	X		
2. More than maximum specified.			X

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:36Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
h. Stitches skipped or broken:			
1. On edge or raised stitching:			
- 1/2 inch or more			X
- less than 1/2 inch in two or more places.		X	
2. On all other stitching, see "open seams".			
i. Stitch tension (except bartacks):			
1. Loose tension on edge or raised stitching, resulting in exposure of bobbin or top thread.		X	
2. Loose tension, resulting in a loose seam.	X		
3. Tight tension (stitches break when normal tension is applied to seam or stitching).	X		
Note: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by extending pull in lengthwise direction of seam.			
Bartacks or tacks			
a. Missing, insecure, misplaced, or not serving intended purpose:			
- one bartack		X	
- two or more.	X		
b. Loose tension on one or more bartacks.		X	
Binding at armholes			
a. Not securely caught in stitching.	X		
b. Twisted.			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:36Z
Check the source to verify that this is the current version before use.

2.3.3 Detailed defects.-

Defect	Classification Major	Minor A	Minor B
Collar			
a. Top collar twisted or tight.	X		
b. Edge uneven.		X	
c. Fullness on top collar.		X	
d. Edge not forced out.			X
e. Fullness or pleats at joining seam.		X	
f. Collar off center by 1/2 inch or more.	X		
Snap fasteners			
a. Stud and socket out of alignment, causing bulge.	X		
b. Not specified type or size.		X	
c. Missing or broken.	X		
d. Stud or socket not clinched through fabric.	X		
e. Center of fasteners more or less than required distance from finished edge.		X	
Equal length of fastened fronts			
a. Left front shorter than right front at bottom when fastened by:			
- more than 1/4 inch to 1/2 inch, inclusive		X	
- more than 1/2 inch.	X		
b. Left front longer than right front at bottom when fastened by:			
- 3/8 inch to 1/2 inch, inclusive		X	
- more than 1/2 inch.	X		
c. Fronts uneven at neck when fastened, by more than 1/4 inch.	X		
Breast pocket			
a. Misplaced.	X		
b. Poorly shaped or set on crookedly.		X	
c. More or less than specified size.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Breast pocket (cont'd)			
d. Hem finishing less than 1 inch or more than 1-1/4 inches wide.			X
e. Full or tight at opening.		X	
f. Stitching forming pencil pocket missing.		X	
g. Pencil pocket less than 1-1/4 inches or more than 1-1/2 inches wide.		X	
Lower pockets			
a. Out of alignment:			
- from 1/2 inch to 3/4 inch, inclusive		X	
- more than 3/4 inch.	X		
b. More or less than specified size.		X	
c. Hems irregular in width, by 3/16 inch.		X	
d. Full or tight at opening.		X	
Fronts			
a. Facings puckered or pleated.		X	
b. Front edges uneven.		X	
c. Front edges not properly forced out.		X	
d. Facing tight, short or twisted.	X		
e. Excessive fullness on facings.		X	
Sleeves			
a. Puckered or pleated at armhole joining seam.		X	
b. Seam turned toward sleeve, at armholes.	X		
c. Underarm finishing on top of top sleeve at sleeve outseam or inseam.		X	
d. Hem less than 1-3/8 inches or more than 1-5/8 inches wide.			X
e. Hem twisted, causing puckers or pleats at bottom of sleeve.		X	
f. Sleeve bottom hemmed before joining of sleeve seams.		X	
Bottom hem			
a. Uneven in width by more than 3/16 inch.			X
b. Less than 5/8 inch or more than 7/8 inches wide.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Hanger			
a. Missing or misplaced.	X		
b. Not properly caught in collar seam.		X	
c. Not specified width or length.			X
Direction of seams			
a. Fronts lapped over back at shoulder and side seams.		X	
b. Right lapped over left at back seam.		X	
Combination label			
a. Not positioned as specified.		X	
b. Not stitched on all sides.		X	

4.2.3.4 Size measurement defects.-

(Finished measurements)

Chest Back Sleeve inseam	Any measurement deviating from the nominal dimensions and tolerances included in table III shall be classified as a size defect.
Equal length of sleeve	Sleeves uneven in length by 3/4 inch shall be classified as a size defect.

4.2.3.5 Acceptable quality levels and inspection levels.- The inspection levels and acceptable quality levels, expressed in defects per hundred units (DHU) shall be as follows:

	AQL's	Inspection level
For defects listed in 4.2.3.2 and 4.2.3.3:		II
Major	2.5	
Major and Minor A (combined)	15.0	
Total (Major, Minor A and Minor B combined)	25.0	
For defects listed in 4.2.3.4:		S-3
One class	4.0	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

4.2.4 Examination of preparation for delivery requirements.- An examination shall be made to determine compliance with the packaging, packing and marking requirements of Section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examination	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Material	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling, open and non-continuous heat sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag. Bulged or distorted container.
Content	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each buttoned coat shall be laid front down, the sides and sleeves folded in over the back and the bottom folded up to the shoulders to approximate dimensions of 12 by 11 inches. The size label shall be clearly visible in front so as to permit ready identification. Each folded coat shall be individually inserted in a snug-fitting flat style, clear polyethylene film bag of 0.00125 inch thickness (± 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4-inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Level C.- Coats shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:36Z
Check the source to verify that this is the current version before use.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.- Forty-eight coats of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to V3c of PPP-B-636. Level A packages shall be packed flat, two in length, two in width, and 12 in depth within a shipping container. Inside dimensions of each container shall approximate 24 inches in length, 22 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B.- Forty-eight coats of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF or SF, variety SW, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, variety SW, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat two in length, two in width, and 12 in depth within a shipping container. Inside dimensions of each container shall approximate 24 inches in length, 22 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed in accordance with method II as specified in the appendix of the container specification. Towards the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 When specified, shipping containers shall be fabricated from V3c or V3s fiberboard (see 6.2).

5.2.3 Level C.- Coats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:36Z
Check the source to verify that this is the current version before use.

5.3.1 Labels, mixed sizes.- Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.3.2 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
QUANTITY
SIZE

6. NOTES

6.1 Intended use.- The coat is intended for use by male hospital personnel assigned to duties involving direct patient care in hospitals of the Department of Defense.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) When preproduction sample is required (see 3.2).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) Whether V-board containers are required for level B shipments (see 5.2.2.1).

6.3 Samples.- For access to samples, address the procuring office issuing the invitation for bids.

6.4 Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - GL
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03
Defense Supply Agency - DM

Preparing activity:

Army - GL

Project No. 6532-1009

Code "N"

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:36Z
Check the source to verify that this is the current version before use.

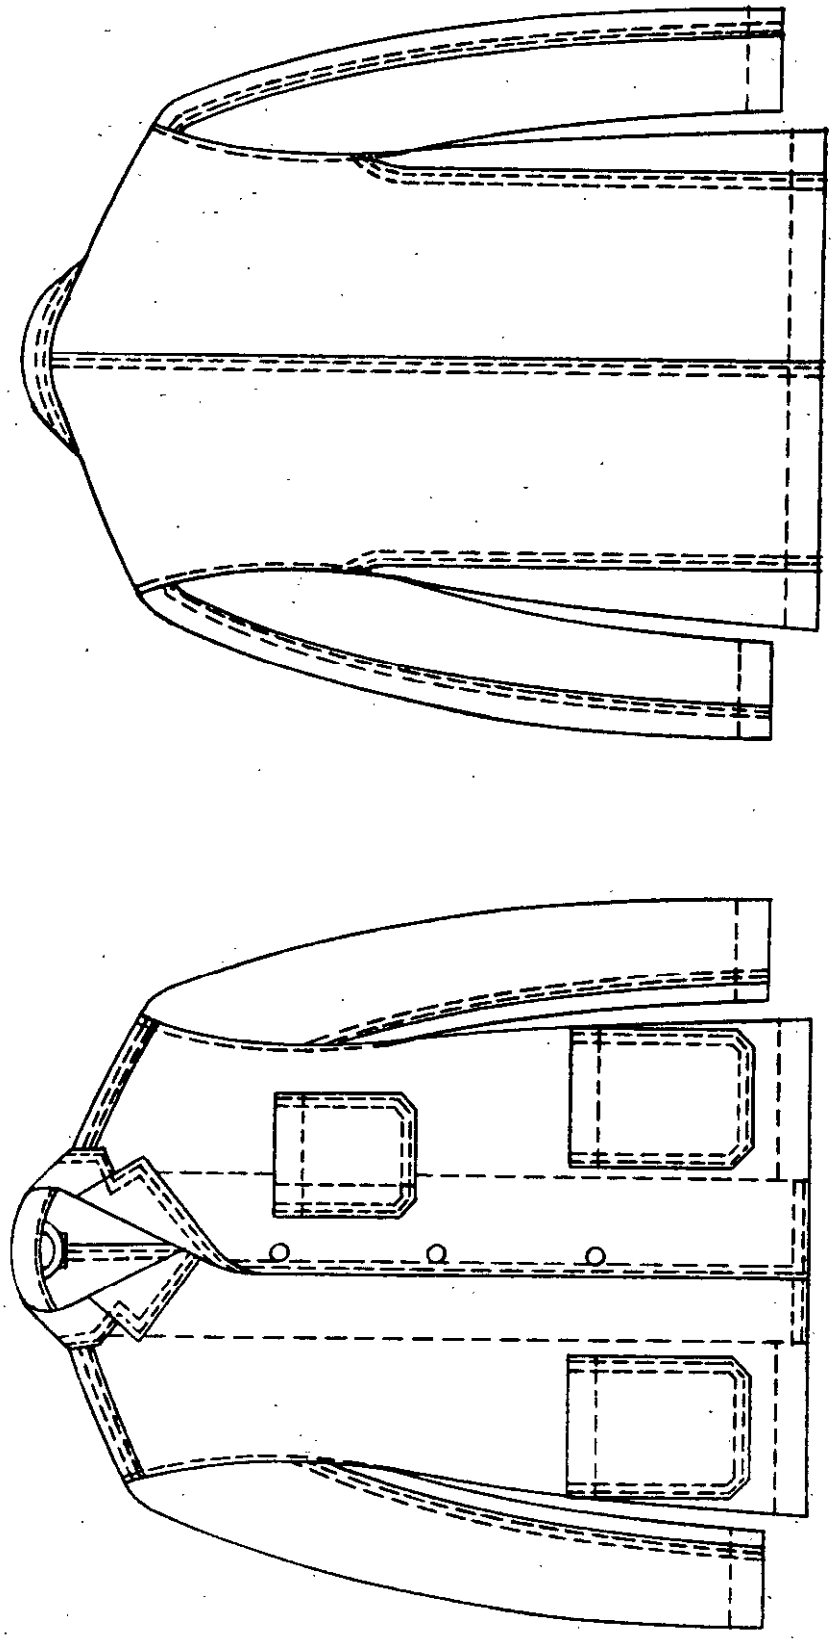


FIGURE 1-COAT, MAN'S MEDICAL ATTENDANT

Source: https://assist.dla.mil Downloaded: 202610-21T08:36Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau . 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Coat, Man's, Medical Attendant - MIL-C-36445A

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:36Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-QS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:36Z
Check the source to verify that this is the current version before use.