FED. SUP CLASS.
5935

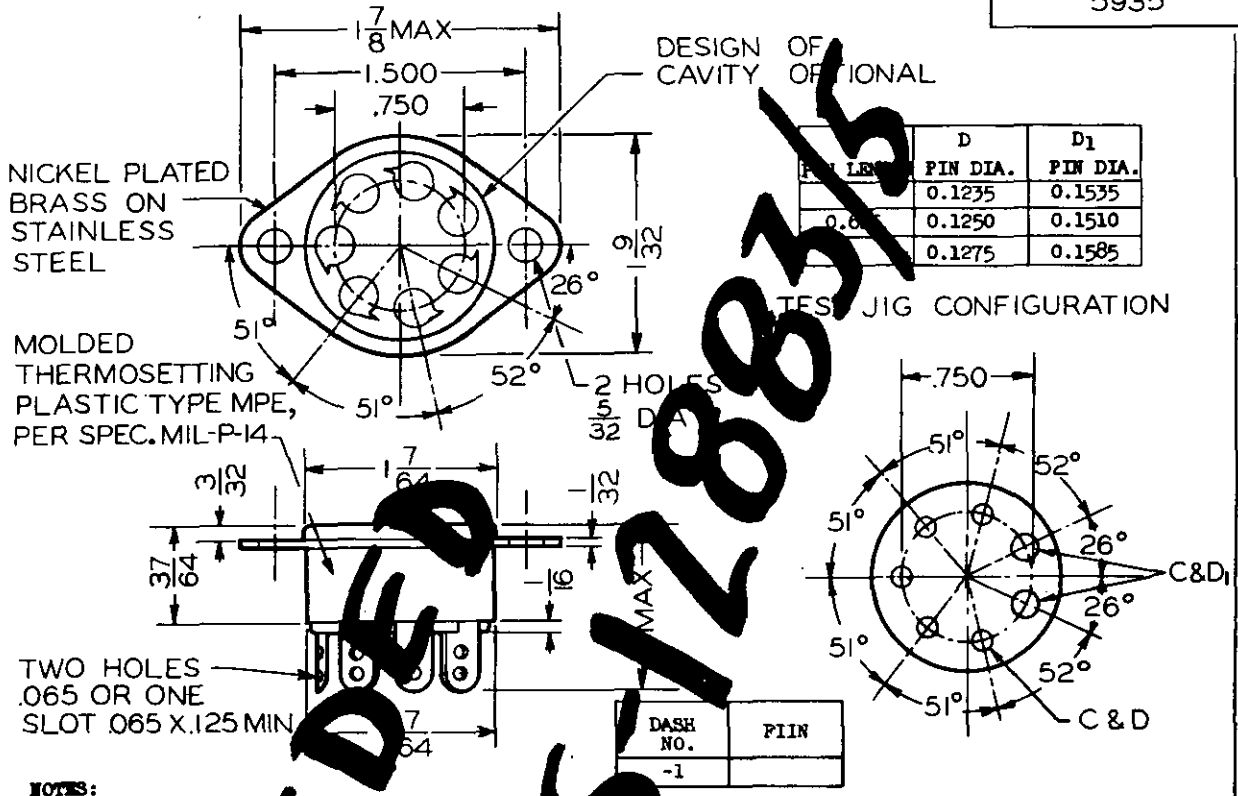

D PIN DIA.	D_1 PIN DIA.
0.1235	0.1535
0.1250	0.1510
0.1275	0.1585

DASH NO.	PIIN
-1	

NOTES:

1. REFERENCED SPECIFICATIONS OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.
2. SOCKET SHALL BE MARKED WITH THE MANUFACTURER'S NAME OR SYMBOL.
3. SOCKET SHALL ACCOMODATE VIBRATOR TYPE M 3335C AS MANUFACURED BY CORNELL DUBILIER OR EQUAL.
4. INSERTION AND WITHDRAWAL FORCE (8 LBS. MIN. TO 20 LBS. MAX.), DIELECTRIC TEST (3500 VOLTS AC FOR ONE MINUTE), DIELECTRIC TEST AT ALTITUDE (1.150 VOLTS AC FOR ONE MINUTE).
5. VIBRATOR TYPE M3335C AS MANUFACTURED BY CORNELL DUBILIER OR EQUAL, TO BE USED AS TEST JIGS FOR SHOCK AND VIBRATION TESTS.
6. MOISTURE RESISTANCE NOT APPLICABLE.
7. TOLERANCE ON FRACTIONAL DIMENSIONS OF SOCKET SHALL BE ±1/64, DECIMAL DIMENSIONS ±.005, UNLESS OTHERWISE SPECIFIED.

SUPERSEDED
USE MIL-S-12883/5

Project 5935-A120

ALL DIMENSIONS IN INCHES

APPROVED 6 AUG 54 REVISED A 24 March 1966

CUSTODIAN	MILITARY STANDARD	MS35384(S1gC)
SIGNAL CORPS	SOCKET, VIBRATOR (7 CONTACTS)	
PROCUREMENT SPECIFICATION MIL-S-12883(S1gC)		SHEET 1 OF 1

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MS FORM 233
1 NOV 50

Source: https://assist.dla.mil -- Downloaded: 20261O-23T17:22Z
Check the source to verify that this is the current version before use.

Army, Ft. Monmouth, NJ-MON4004SM-59

C69288