FED. SUP CLASS
4820

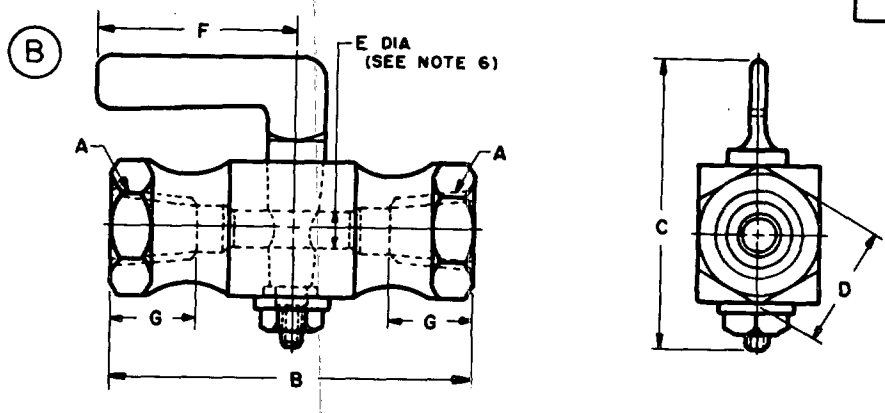

REVIEWER: AT, GL, ME, MU
USER: CS, EL, MI, YD

DASH NUMBER	A PIPE THREAD NPTF	B MAX	C MAX	D ACROSS FLATS ±0.02	E MIN	F MAX	G MAX
1	1/8-27	1.75	1.94	0.56 or 0.75	0.16	1.38	0.38
2	1/4-18	2.12	2.20	0.75 or 0.88	0.16	1.38	0.56
3	3/8-18	2.44	2.44	0.88 or 0.94	0.18	1.75	0.56

NOTES:

(B) 1. MATERIAL: Brass, QQ-B-626, Alloy Number 268 or 360 or QQ-C-390, Alloy Number B5.

2. PROTECTIVE COATING: None.

3. THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.

4. DIMENSIONS: Unless otherwise specified all dimensions are in inches.

5. The illustration is for identification purpose only and is not intended to restrict designs or shapes not dimensioned.

6. Oval port having same cross sectional area is acceptable.

7. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35931-1.

8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

9. Referenced documents shall be of the issue in effect on date of invitations for bid.

10. This item is for use in liquid or gas systems wherein the pressure does not exceed 125 p.s.i. and the liquid or gas is compatible with brass.

APPROVED 17 FEB 59 REVISED (A) 14 SEPT 67 (B) 28 SEPT 73

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust SH 82	TITLE (B) COCK,PLUG,GROUND KEY,THREADED TYPE, 125 P.S.I.	MILITARY STANDARD MS35931
PROCUREMENT SPECIFICATION MIL-C-1203	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

1807

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:31Z
Check the source to verify that this is the current version before use.