FED. SUP CLASS
6640

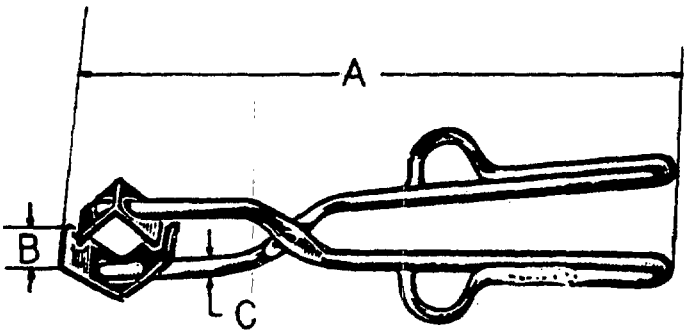

PART NUMBER	DIMENSIONAL DATA (in.) A OVERALL LENGTH	B HEIGHT OF JAWS	C DIAMETER OF WIRE
MS36026-1	9	1 ± 1/8	1/4

© MATERIAL: Finger and thumb arms shall be of corrosion-resisting steel wire in accordance with ASTM A 313.

Jaw portions shall be of corrosion-resisting steel in accordance with Federal Specification QQ-S-766, Class 302.

DESIGN: Tongs shall be capable of firmly gripping Erlenmeyer, Florence, or any round bottom flasks which accommodate rubber stoppers, numbers 4 to 8 inclusive. Jaws shall open to a minimum of 3-1/4 inches.

Grip shall be designed to accommodate finger and thumb. Joint shall be flattened at the rivet to prevent finger and thumb grips from shifting out of alignment. Rivet shall be spun to insure free action without binding.

© NOTES:
1. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

© 2. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

© 3. FSCMs: 08474, 11273, 11876, 22527, and 59728.

APPROVED 23 DEC 1959 REVISED Ⓐ 15 DEC 1967 Ⓑ 08 DEC 1975 © 11 AUG 1...

USER ACTIVITIES: ARMY - ME

REVIEWER ACTIVITIES ARMY - MD NAVY - MS DoD - DP

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. EA / Other Cust MS	INTERNATIONAL INTEREST	TITLE: TONGS, LABORATORY flask type	MILITARY STANDARD MS36026
PROCUREMENT SPECIFICATION: NNN-T-580	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-1429-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.