FED. SUP CLASS
5340

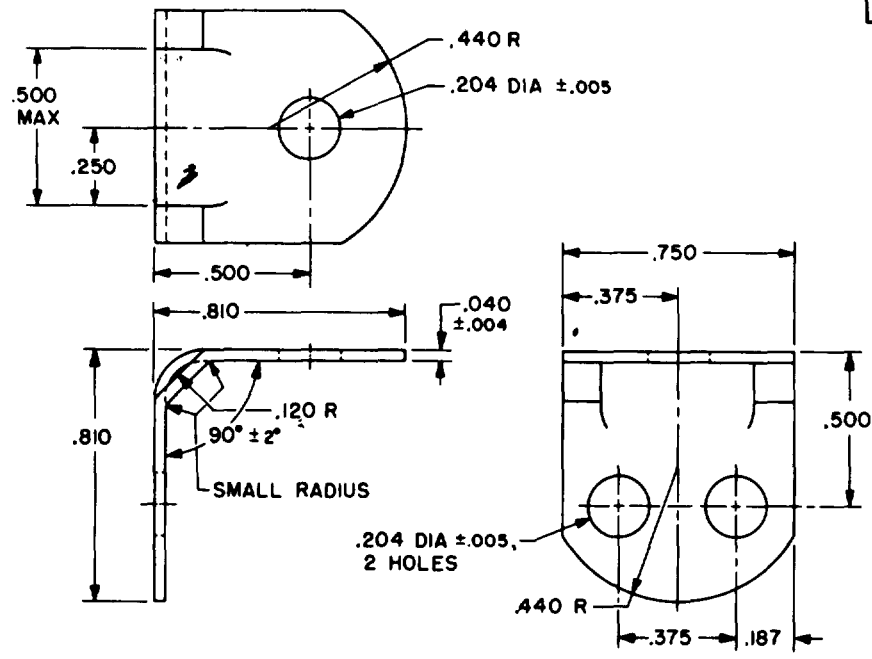

MS PART NO.	MATERIAL
MS39085-1	ALUMINUM ALLOY
MS39085-2	CORROSION-RESISTING STEEL

NOTES:

Ⓐ

1. MATERIAL: Aluminum alloy alclad 2024 in accordance with QQ-A-250/5, Temper T4. Corrosion-resisting steel in accordance with QQ-S-766, Composition 302, Condition A (annealed).
2. DIMENSIONS: All dimensions are in inches, unless otherwise specified. Tolerance ±.015, unless otherwise specified.
3. Remove all burrs and sharp edges.
4. This bracket is intended to support tube and cable clamps such as described in MS21919.
5. Aluminum alloy brackets can be used from 300° F. to below the temperature of liquid air.
6. Corrosion-resisting steel brackets can be used from 800° F. to below the temperature of liquid air.
7. Choice of bracket material and fasteners should be based on temperature extremes and galvanic corrosion possibilities in order to insure against failure.
8. Referenced documents should be of the issue in effect on date of invitations for bid.
9. For design feature purposes, the standard takes precedence over procurement documents referenced herein.

Ⓐ INACTIVE FOR NEW DESIGN AFTER 25 MAY 1973.

REVIEWER: AV, IS, MU
USER: AT, EL, ME, MI

This military standard is approved by the Weapons Command, Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 12 MAY 1959 REVISED Ⓐ 25 MAY 1973

P.A. WC Other Cust	TITLE BRACKET, ANGLE, CABLE CLAMP SUPPORT	MILITARY STANDARD MS39085(WC)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.