FED. SUP CLASS
4730

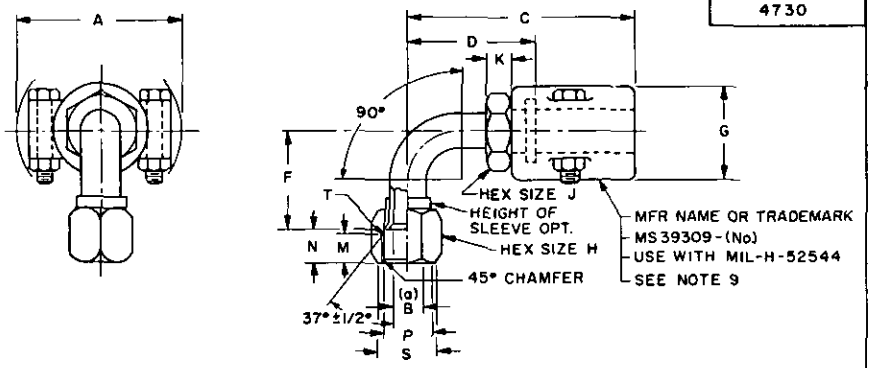

(a) DIMENSION P TO BE CONCENTRIC WITH DIMENSION B WITHIN 0.005 FULL INDICATOR READING.

B DIMENSION IS THE BORE.

S DIMENSION IS THE EDGE OF THE CHAMFER.

P DIMENSION IS THE EDGE OF THE 37 DEGREE FLARE.

M DIMENSION IS THE MIN. THREAD LENGTH.

N DIMENSION IS THE LENGTH FROM THE EDGE OF THE 37° FLARE TO THE END OF THE NUT.

DIMENSIONS FOR 3/4-INCH COUPLINGS

DASH NO.	HOSE I.D. (REF)	T NOM THREAD SIZE	A MAX	B MIN	C MAX	D MAX	F	H HEX
-12	.750	1-1/16-12	3.000	.600	4.155	2.468		1.250

DASH NO.	J HEX	K MIN	M MIN	N ±.031	P ±.00[illegible]	[illegible]S.	OVER-TIGHTENING TORQUE
-12	.875	.38	.469	.562		300	1000 IN. LBS

CANCELLED After 25 October 1972
NO SUPERSEDING STANDARD

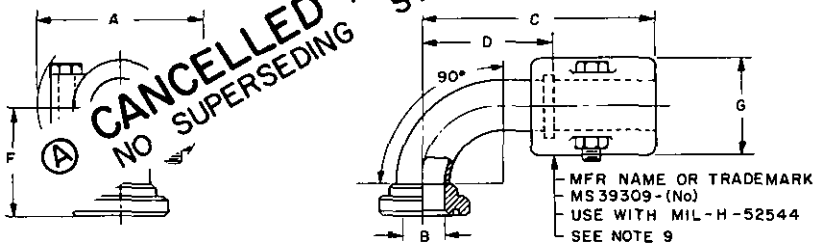

DIMENSIONS FOR 1-INCH THROUGH 4-INCH COUPLINGS

DASH NO.	HOSE I.D. (REF)	A MAX	B MIN	C MAX	D MAX	F ±.062	G MAX	MAX WORKING PRESS.
-16	1.00	4.000	.810	4.88	3.03	2.375	2.060	250
-20	1.25	4.625	1.040	6.00	3.43	2.625	2.630	200
-24	1.50	5.000	1.250	7.00	3.97	3.125	2.940	150
-32	2.00	5.250	1.730	8.50	5.59	4.500	3.500	100
-40	2.50	5.500	2.188	7.50	5.10	4.625	3.563	62
-48	3.00	6.188	2.750	8.66	6.10	5.500	4.063	55
-56	3.50	6.375	3.250	9.65	6.96	6.375	4.500	50
-64	4.00	7.375	3.750	10.63	7.82	7.375	5.250	50

User interest: AT
Review interest: WC

This military standard is approved by [illegible], Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 4 May 1967 REVISED (A) 25 OCTOBER 1972

P.A. ME Other Cust	TITLE COUPLING, HOSE: REUSABLE, HYDRAULIC, OIL SUCTION, 2-BOLT CLAMP-ON, 90° BENT TUBE	MILITARY STANDARD MS39309(ME)
PROCUREMENT SPECIFICATION MIL-C-52545	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:51Z
Check the source to verify that this is the current version before use.