FED. SUP CLASS
3830

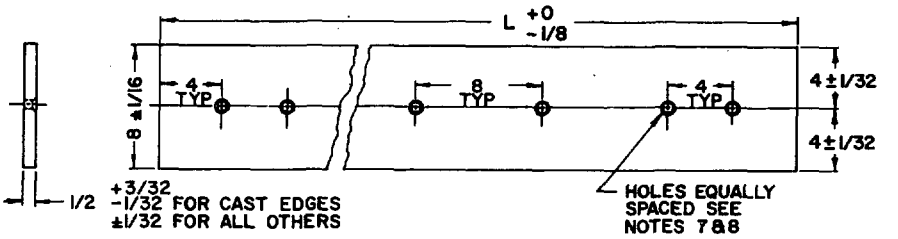

DASH NO.	SIZE	LENGTH "L"
-1	1	96
-2	2	108
-3	3	120
-4	4	132
-5	5	144
-6	6	168

NOTES:

1. MATERIAL: STEEL, ALLOY, TO CONFORM TO FED. STD. NO. 66, TABLE 8, SAE - 1080.
2. THE MS PART NUMBER SHALL CONSIST OF THE MS SHEET NUMBER PLUS THE DASH NUMBER.
   EXAMPLE: MS 39334 -1.
3. HEAT TREATMENT: HARDNESS, BRINELL 250 to 325.
4. FLAME CUTTING TO WIDTH OR FLAME CUT BEVELS SHALL NOT BE PERMITTED.
5. CUTTING EDGES SHALL HAVE SQUARE ENDS (NO ANGLE CUT OR BEVEL ENDS).
6. CUTTING EDGES SHALL BE SMOOTH, FREE FROM FLAWS, LOOSE MILL SCALE, AND RUST.
7. HOLES SHALL BE FOR A 5/8-INCH DIAMETER BOLT WITH A NUMBER 3 PLOW BOLT HEAD IN ACCORDANCE WITH SAE STANDARD J740 FOR COUNTERSUNK SQUARE HOLES FOR CUTTING EDGES AND END BITS.
8. EACH BOLT HOLE SHALL BE LOCATED WITHIN ± 1/32-INCH OF TRUE POSITION CIRCLE, USING THE CENTER OF THE END HOLES AS DATUM POINTS.
9. STANDARD MILL ROLLING TOLERANCES SHALL APPLY ON FLATNESS, CAMBER, AND BEVEL EDGES.
10. ALL DIMENSIONS ARE IN INCHES.
11. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Review activities: 85
User activities: YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 23 APRIL 1970 REVISED

P.A. ME Other Cust AIR FORCE - 84	TITLE CUTTING EDGES, MOLDBOARD, SNOWPLOW	MILITARY STANDARD MS 39334
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Cancelling)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.